


OLI



GENERAL CATALOGUE

2025/2026

Inspired by water...



As part of OLI's vision of sustainability, this catalogue is printed on Recycled label.

The forest-based material in this product is recycled.
The FSC® label on this catalogue ensures responsible use of the world's forest resources.


INDEX

COMPANY	06
IN-WALL CISTERNS	18
SPECIAL SOLUTIONS	80
FRAMES	96
FLUSH PLATES	114
EXPOSED FLUSH CISTERNS	160
MECHANISMS	174
SANITARY WARE	190
MIXERS & TAPS	220
SHOWER DRAINS SYSTEMS	230
TOWEL RADIATORS	252
OLI SERVICES	257

COMPANY

Inspired by water for 70 years, OLI is now the largest producer of cisterns in Southern Europe and is present in bathrooms all over the world. Constantly growing and looking to the future, OLI already has 6 commercial & logistical subsidiaries to strengthen its position in the market.

Its aim is to develop aesthetically pleasing and functionally differentiating solutions that make the bathroom an efficient, sustainable, comfortable and safe place for everyone. With a focus on cisterns and all their components, such as flushing mechanisms, OLI also offers a growing range of products that combine innovation and design with sustainability and a constant concern for the rational and efficient use of water.

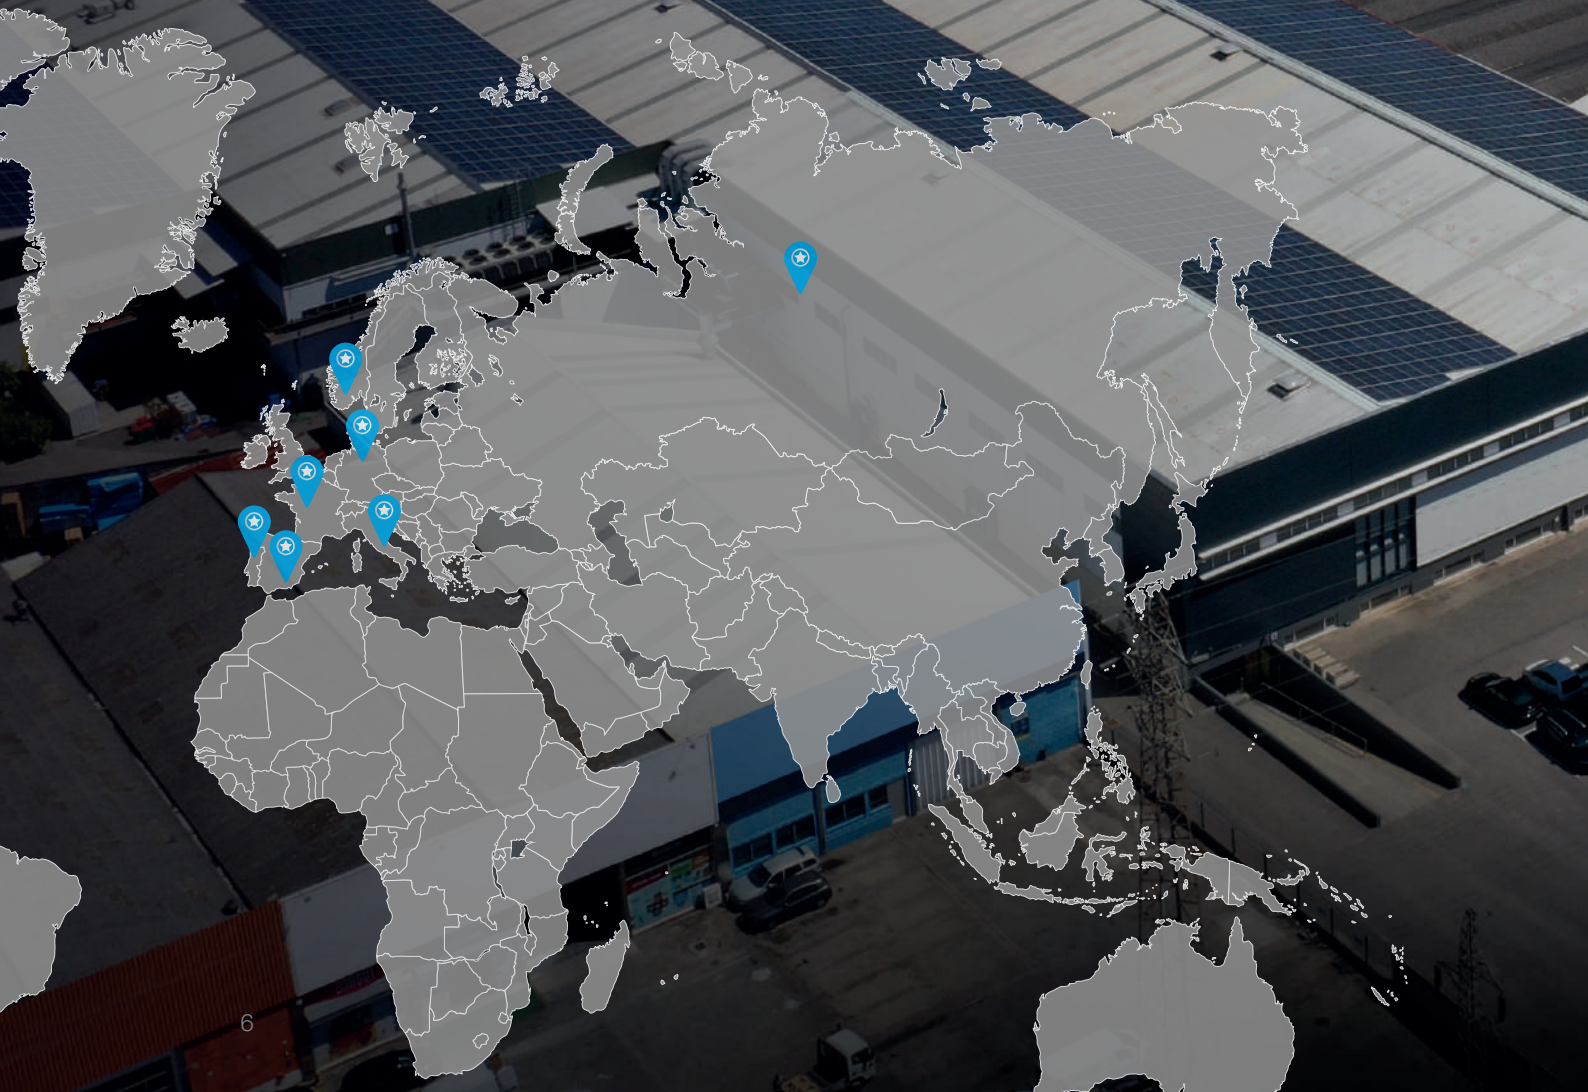

At OLI, innovation aimed at reducing water consumption in the bathroom is at the heart of its business strategy and also at its genesis. Committed to being an active agent in safeguarding the life of the planet, OLI strives every day to think of new and better solutions through functional, sustainable and differentiating offers.



>450
Employees



3 Factories
Portugal + Italy
+ Russia



Subsidiaries
6

Production Volume

>2 M cisterns / year
>3 M flushing mechanisms / year
>150 M injected components / year



27
Patents



Water is more than an essential and vital resource; it is and will continue to be our inspiration for creating innovative and sustainable solutions. At OLI, we turn every drop into ideas that flow towards a more sustainable future.



FSC CERTIFICATION

Catalogs, brochures and cardboard packaging are already FSC certified.



INCREASE

the use of recycled raw materials.



NO MORE BLISTER PACKS

represents a saving of 11 tons of plastic per year.



GREEN ENERGY PRODUCTION

>3800 Photovoltaic panels

SUSTAINABILITY

WATER AND ENVIRONMENTAL SUSTAINABILITY



DUAL FLUSH

Combining an efficient valve and a flush plate with half-flush and full-flush options. In 1994, OLI was responsible for the mass introduction of dual flush cisterns, bringing huge environmental and economic benefits on a global scale.



PLUS SYSTEM

This is a system created by OLI where the inlet valve delays the inflow of water into the cistern to prevent extra water being used for flushing. While flushing takes place, no new water enters the cistern. This allows saving up to 9 litres of water per day, which corresponds to an approximately to a 12% reduction in the water bill.



4/2 L

The combination of a cistern set to flush 4 liters (full flush) and 2 liters (half flush) with an efficient toilet suitable for the purpose means immediate water savings.



CISTERN WITH 2 INLET VALVES

This flushing cistern is distinguished by having two water inlet valves. One for drinking water from the mains and another for non-potable water designed for rainwater, but applicable to other waters (boreholes or water wells) ensuring that only clear and filtered water is used. In this way it's possible to reuse rainwater for toilet flushing, saving drinking water that is essential for human consumption. It allows a more efficient use of the water resource and a saving in the water bill.

Throughout our history, we have contributed solutions that mark our essence and characterize us by the care we take of this precious commodity. We celebrate sustainability on several fronts through water-efficient solutions that bring nature into the heart of bathrooms through water and responsible attitudes.

TECHNOLOGY

In a competitive demanding market, innovation is a central priority. At OLI we reinforce efficiency and functionality by integrating technology into the bathroom.

The OLI logo is positioned on the right side of the page. It features a stylized white 'O' with a small dot inside, followed by the letters 'LI' in a bold, sans-serif font. The background of the page is black, with a large, glowing green circular graphic that has a halftone dot pattern, partially overlapping the logo.



Technology and water come together to transform the bathroom experience.

QUALITY



In our life time and standards testing laboratory, we test more than 200 products every year in different conditions (different actuations, waters, pressures). Before any product is launched on the market, OLI tests all its products to their limits, entrusting the market with a world class quality guarantee.

OLI
PERFORMANCE & COMPLIANCE LABS

Água da Chuva

A chuva e água...
 desperdício ou...

Behind quality products are demanding processes that guarantee their excellence in any bathroom in the world. The multiplicity of markets in which we operate forces us to maintain a high level of excellence and this is a daily challenge that is at the heart of our work.

At OLI we have more than 75 products certified by different entities recognized worldwide.





The aim of OLIPRO is to enable any installer of the OLI products to have more technical knowledge about the specificities of installation and the scope of solutions for different types of needs.

Providing technical knowledge in order to guarantee the correct installation of the product to all those who deal with it improves efficiency and minimizes future occurrences in terms of technical assistance.

OLI therefore has some free services that may be useful for you.

PRE-INSTALLATION SUPPORT

The correct installation of products in the pre-installation phase of a construction project is crucial to ensure their durability and efficiency, contributing from the outset to the structural and functional integrity of the entire project.

Whether remotely, on site or at our OLI PRO training centre, our professionals will provide support that will contribute to the success of any project by establishing close contact with you.





Being close to our customers and the agents who handle our products is a successful strategy for OLI. Ensuring the correct installation of the product is fundamental to its success in any project.

INTEGRATED SOLUTIONS

OLI sees the bathroom as a space that combines water efficiency with design and is centred on functionality. We therefore present a complete range of products for demanding bathrooms projects.



BREEAM + LEED

Solutions that can contribute to the BREEAM + LEED rating of buildings



IN-WALL CISTERNS

OLI's wide range of in-wall cisterns guarantees efficient use of water and is prepared with models that adapt to different building realities.




FLUSH PLATES

With different shapes, finishes and actuations, OLI offers a complete and differentiated range of flush plates.




SANITARY WARE

A range that combines design and water performance. Equipped with Rim-off technology and quality glazing, the sanitary ware range has a refined design that adapts to any bathroom.

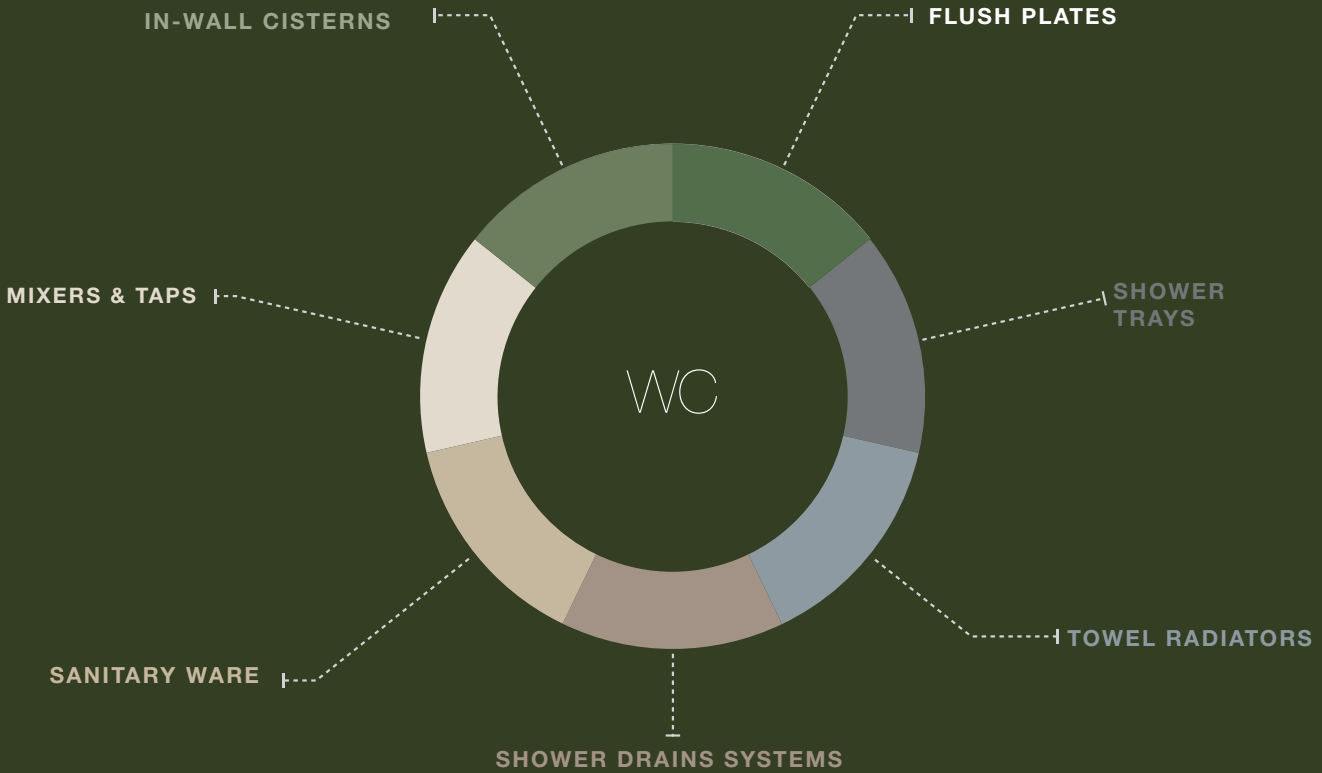

SHOWER DRAINS SYSTEMS

OLI offers a range of shower drains systems with different technologies that provide accessibility and comfort in the bathroom. Whether on the floor or in the wall, OLI's solutions ensure effective water drainage.



TOWEL RADIATORS

OLICLIMA towel radiators contribute to the comfort of your home, allowing the user to adjust the temperature and the operating time according to the needs of the user.



SHOWER TRAYS

OLI presents a range of shower trays in various sizes, colours, and antibacterial & anti-slip finishes, with a pure and minimalist style.



MIXERS & TAPS

The industrial design, simplicity of lines, and sensitive touch are all featured in OLI's range of taps.



Inspired by water.
OLI
www.oli-wort.com

MADE IN EU

OLI70 PLUS	22
OLI120 PLUS	28
OLI74 PLUS	42
EXPERT PLUS	58
QUADRA PLUS	66
OLI80	72



Brick-wall, floor mounted toilet



Brick-wall, wall-hung toilet



Drywall, wall-hung toilet



Drywall, floor mounted toilet



2 inlet valves



Small spaces



Happy Air



Saves up to 9l of water per day



Front or top actuation



SHT Shower Toilet



One man assembly



Stop Fire



AC power-mains



Public spaces



OLIpure System



80mm thick



90mm thick



126mm thick



180mm thick




Supports up to 400kg



Hydroboost System

IN-WALL CISTERNS SYSTEMS

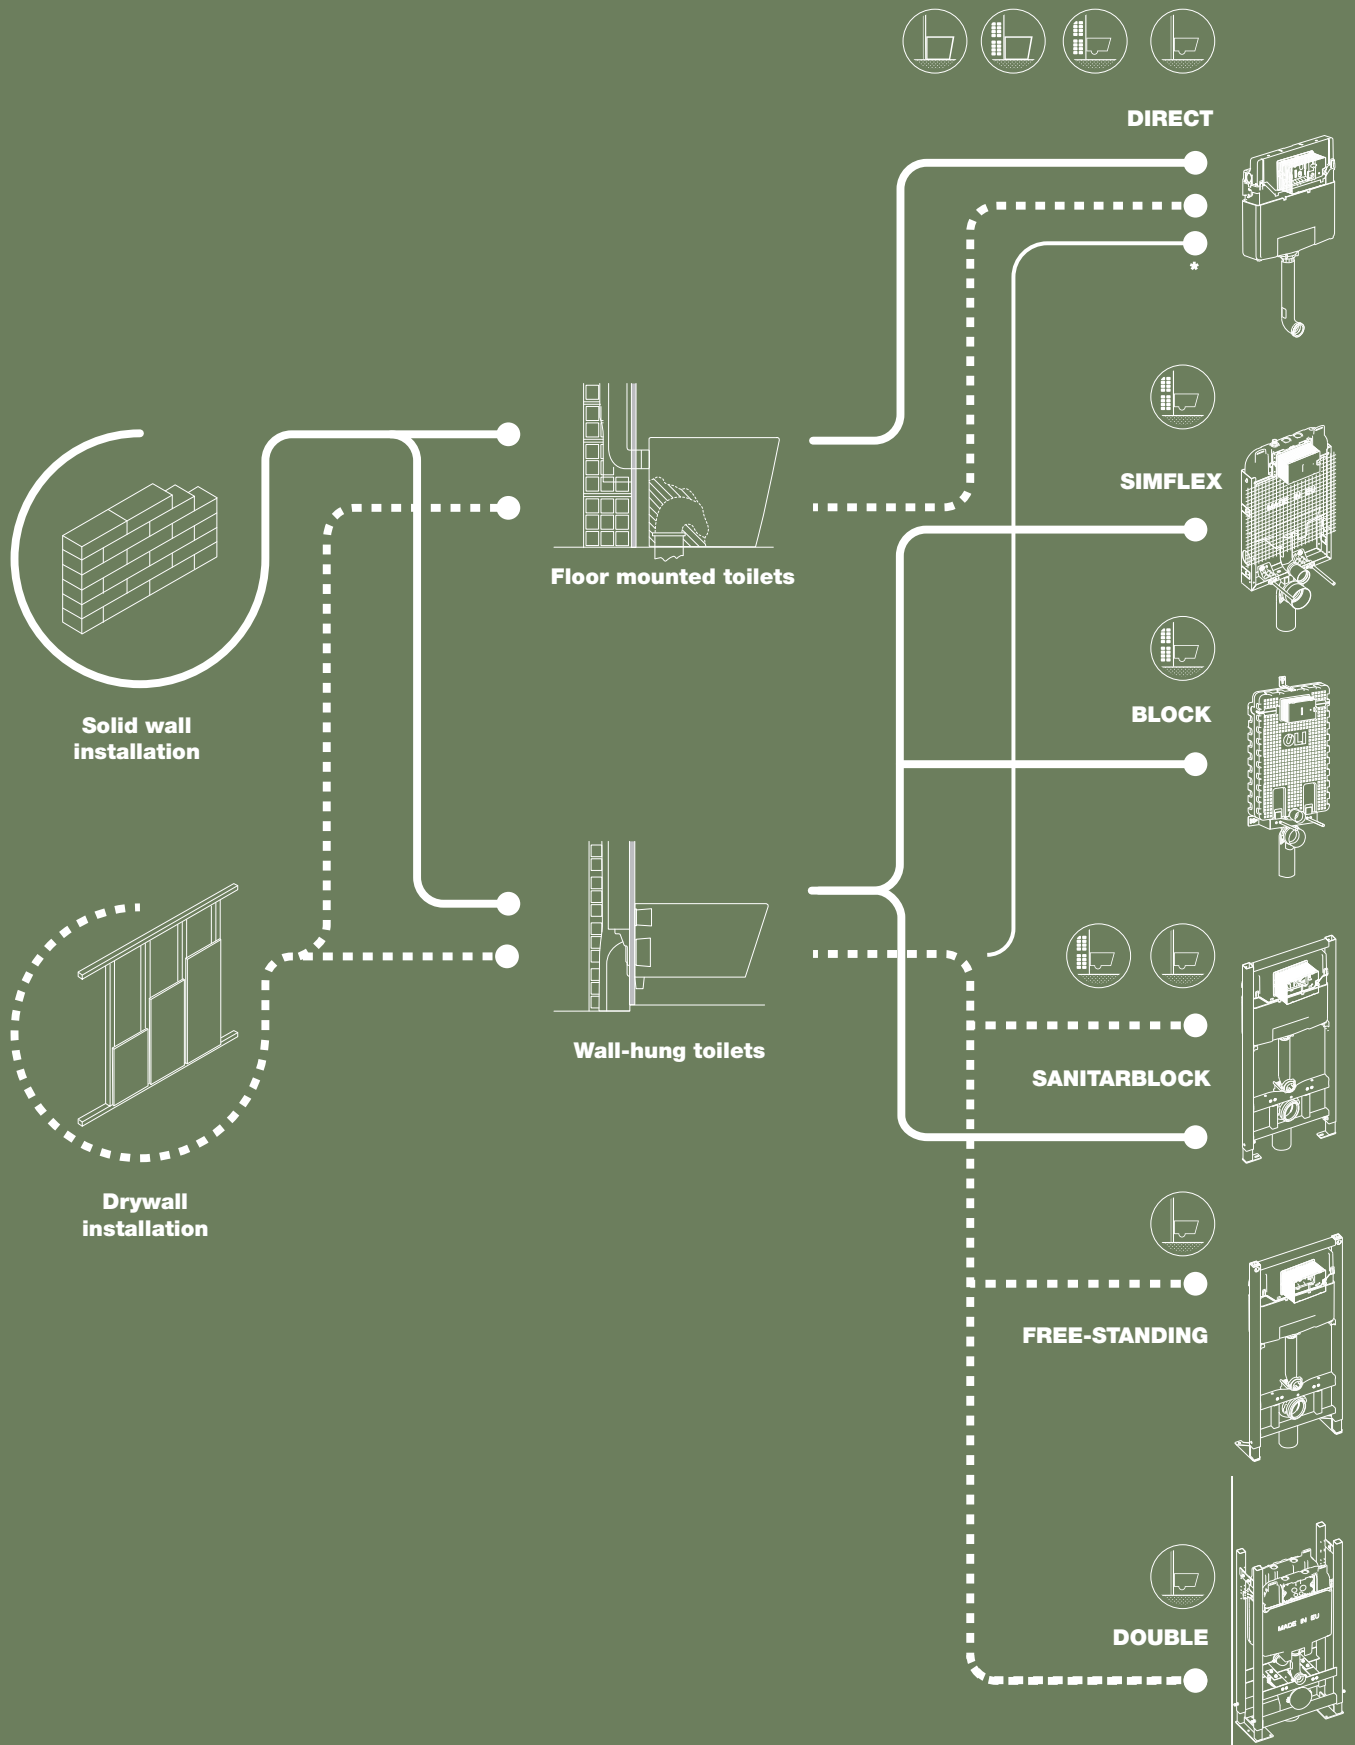



OLI70 PLUS

OLI120 PLUS

OLI74 PLUS

OLI80

EXPERT PLUS

QUADRA PLUS



90mm
thickness

126mm
thickness

80mm
thickness

80mm
thickness

150mm
thickness

187mm
thickness



90mm
thickness

80mm
thickness

80mm
thickness

150mm
thickness



144mm
thickness



90mm
thickness

126mm
thickness

90mm
thickness

126mm
thickness

150mm
thickness

187mm
thickness



180mm
thickness

180mm
thickness


180mm
thickness



240mm
thickness

240mm
thickness

OLI70 PLUS

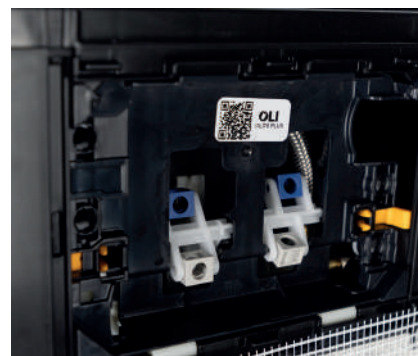

MINIMUM THICKNESS

A slimmer in wall cistern saves you space, just with 9cm deep—sleek and embraced. Modern design, efficiency at installation.

SHOWER TOILET

The OLI70 PLUS in-wall cistern includes pre-installation for a smart toilet and hand shower. The smart toilet and hand shower can be fitted either during the in-wall cistern installation or at a later stage.

MAINTENANCE

Protection plate with levers block for quick and easy maintenance. QR-code to access all technical information.



Compatibility

Wide range of flush plates

	Glam	Metal	Ria	Plain	Globe	Voronoi	
	Slim	Less is More	Key				
	Blink	Trumpet	Oceania	Karisma	Sm15	Easy Dual	Salina 2

OLI70 PLUS NEW



MAINTENANCE

Protection plate with levers block for quick and easy maintenance.



PLUS

Saves up to 9l of water per day



Minimum thickness



SHOWER TOILET

Prepared for shower toilet installation

OUTLET BEND

Fine adjustment of the outlet bend



HEIGHT ADJUSTABLE
0 to 300mm



FLUSH PLATE

Wide range of flush plates and actuations: mechanical, pneumatic



FLUSH VOLUME

Dual flush: 6/3L.
Adjustable to 4/2L or 4.5/3L.

INSTALLATION SYSTEM



Brick-wall, for floor mounted toilets installation



Brick-wall, for wall-hung toilets installation



Drywall, for wall-hung toilets installation



Drywall, for floor mounted toilets installation.



SUPPORTS UP TO 400KG

OLI70 PLUS

Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4/2L or 4.5/3 L);
- Versions available: Mechanical and Pneumatic;
- Cistern made of regenerated polypropylene (PP), highly resistant to ambient temperatures;
- Inlet valve with delayed and silent opening PLUS system;
- Supplied with anti-condensation and acoustic insulation.

INCLUDES IN ALL VERSIONS

- Brick-wall fixing kit;
- G 1/2" stop valve;
- Toilet connection pipes;
- Sanitary ware fixing material (when applicable);
- Outlet bend Ø90/90 and adaptor Ø90/110;
- Sanitary ware fixing material (when applicable).

OLI70 PLUS

Direct

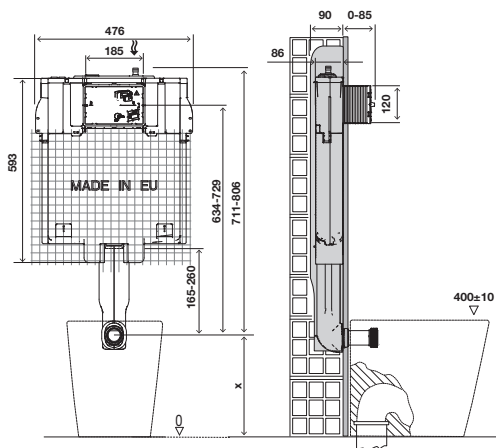

SPECIFIC FEATURES


- Compatible with all floor mounted toilets (6/3 litres version);
- Brick-wall installation;
- 90mm thick.



cod. **885005** Mechanic
 cod. **889576** Pneumatic

OLI70 PLUS

Simflex

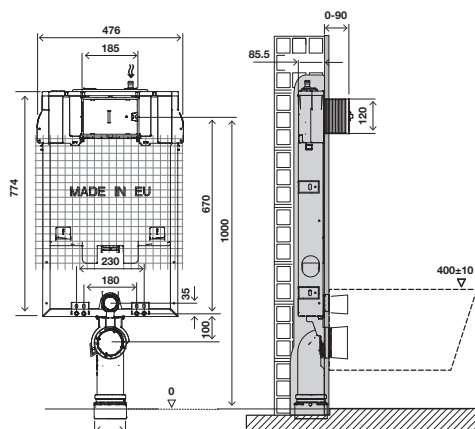

SPECIFIC FEATURES


- Compatible with all wall-hung toilets (6/3 litres version);
- Brick-wall installation;
- 90mm thick.



cod. **885882** Mechanic
cod. **889577** Pneumatic


OLI70 PLUS

S90 Sanitarblock

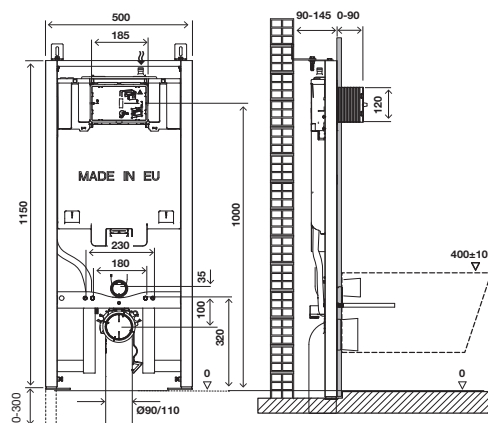


SPECIFIC FEATURES

- Compatible with all wall-hung toilets (6/3 litres version);
- Installation in brick-wall, thin wall or plasterboard;
- Easy and quick installation;
- Adjustable waste pipe curve in depth;
- Height adjustable from 0 to 300 mm;
- 90mm thick.

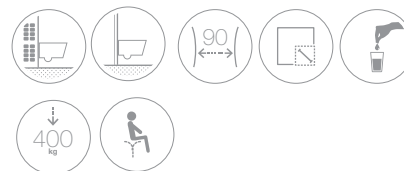

cod. **885130** Mechanic
cod. **890047** Pneumatic

ACCESSORIES IN-WALL CISTERNS OLI70 PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

890081

Pneumatic Conversion Kit



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x180;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD

885108

Eccentric set connection 25mm



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass conector



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Acoustic insulation for Wall-hung toilet and bidet











- Allows the connection between the cistern and the Shower toilet;
- Flexible hose DN6 QF3/8 X QF3/8 X1340mm;
- Flexible hose DN6 QF3/8 X QF3/8 X160mm;
- Easy and quick connection.

COD


890383

Kit SHT OLI70 PLUS

PART NUMBER GUIDE OLI70 PLUS

												
			WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
	885005	889576	586x126x692	3.79	1	-	3.79	36	1.2	0.8	2.236	156.44
	885882	889577	805x150x635	6.848	1	-	6.848	26	1.2	0.8	2.23	198.048
	885130	890047	1180x140x530	14.395	1	-	14.395	20	1.2	0.8	2.28	307.9

OLI120 PLUS




SHOWER TOILET

Prepared for shower toilet installation. Easy way to choose multiple connections.



BLOCKADE

According to the scenario of construction site, the fixation feet have 3 positions and a metal block to adjust to the intended position.

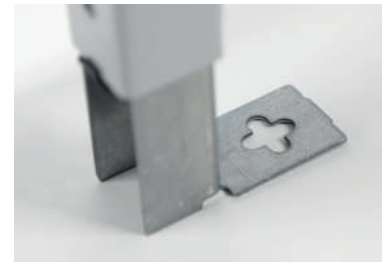


FIXATION FEET

The fixation feet have a cross drilled to increase the margin of the holes, facilitating the installation.



FAST-FIT

Fast-Fit is a system that provides a fixation to the load bearing walls and allows for a fast and precise levelling of the frame.

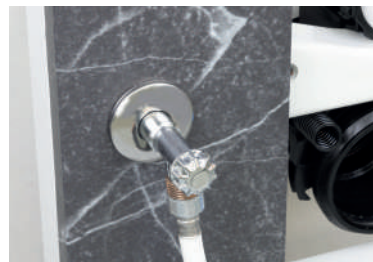

RETROFIT

A solution incorporated into the OLI120 PLUS SHT that allows an intelligent seat & cover to be installed after the cistern installation. This system can be used as a water supply for the toilet seat & cover.



SMART TOILET AND HAND SHOWER

The OLI120 PLUS in-wall cistern includes pre-installation for a smart toilet and hand shower. The smart toilet and hand shower can be fitted either during the in-wall cistern installation or at a later stage.

Compatibility

Wide range of flush plates

	Moon	Glassy					eLINE	Electra III	Hallo	Key
	Glam	Metal	Ria	Plain	Less is More	Slim	Key			
	Globe	Voronoi								
	Blink	SM15	Trumpet	Oceania	Karisma	Easy Dual	Salina 2			

OLI120 PLUS NEW



MAINTENANCE

Transparent protection plate with levers block for quick and easy maintenance



FAST-FIT SYSTEM



PLUS

Saves up to 9l of water per day

SILENT VALVE CLASS 1 CERTIFIED



SHOWER TOILET

Prepared for shower toilet installation

OUTLET BEND

Fine adjustment of the outlet bend



HEIGHT ADJUSTABLE in 200mm



SUPPORTS UP TO 400KG



FLUSH PLATE

Wide range of flush plates and actuations: mechanical, pneumatic, electronic and No-Touch



FLUSH VOLUME

Dual flush: 6/3L
Adjustable to 4/2l or 7/3L



OLIPURE

Cleans and sanitizes the toilet

INSTALLATION SYSTEM



Brick-wall, for floor mounted toilets installation



Brick-wall, for wall-hung toilets installation



Drywall, for wall-hung toilets installation



ONE MAN ASSEMBLY

Foot locking system

OLI120 PLUS

Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4/2L or 7/3L);
- Versions available: Mechanical, Pneumatic, Electronic, Hydroboost and AC versions available;
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Upon request some versions compliant with: NF/KIWA/Belgaqua/WRAS/KIWAUK/SINTEF certifications;
- EN 14055 CE Marking;
- Compatible with all floor and wall-hung mounted toilets;
- Inlet valve with delayed and silent opening PLUS system;
- Brick-wall installation.

INCLUDES IN ALL VERSIONS

- Wall fixing kit;
- G 1/2" stop valve;
- Inlet and outlet toilet connection;
- Toilet fixing material (when applicable);
- Outlet bend and Ø90/110 adaptor (when applicable);
- Sanitary ware fixing material (when applicable).

OLI120 PLUS

Direct

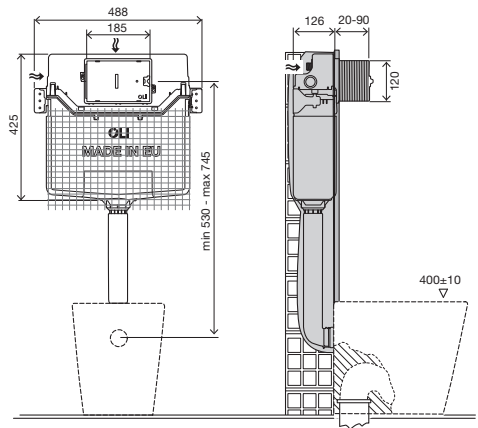

SPECIFIC FEATURES


- Compatible with all floor mounted toilets;
- Brick-wall installation;
- 126 mm thick.



- cod. **885049** Mechanic Nano
- cod. **099941** Mechanic Azor
- cod. **153964** Pneumatic Azor

OLI120 PLUS

Block

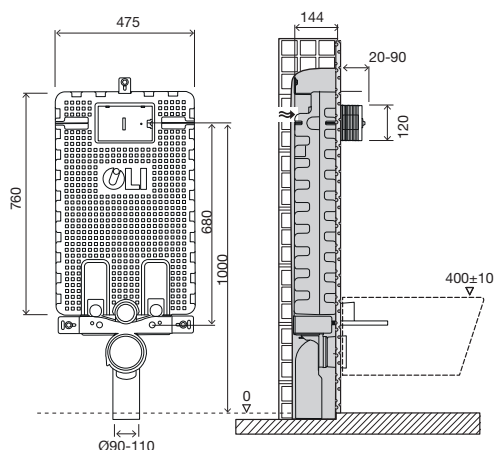

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall installation;
- Robust EPS coating that completely encloses the cistern and allows for faster installation;
- 144mm thick;
- Better sound isolation.



- cod. **885050** Mechanic Nano
- cod. **885053** Pneumatic Nano
- cod. **151339** Mechanic Azor
- cod. **154076** Pneumatic Azor

OLI120 PLUS

Sanitarblock

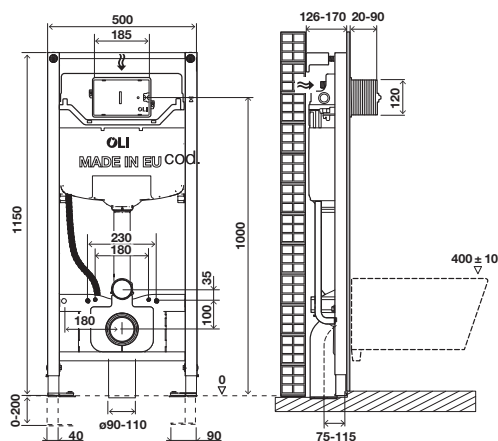

SPECIFIC FEATURES


- Wall-hung toilets up to 660mm long;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- Shower toilet pre-installation multiple connections;
- 126mm thick.



- cod. **885052** Mechanic Nano
- cod. **885055** Pneumatic Nano
- cod. **880780** Mechanic OLIpure Azor
- cod. **878621** Cap AC Azor
- cod. **878846** Cap Hydroboost Azor
- cod. **177305** Electronic Azor
- cod. **177306** Pneumatic Azor
- cod. **099949** Mechanic Azor

OLI120 PLUS NORDIC

Sanitarblock

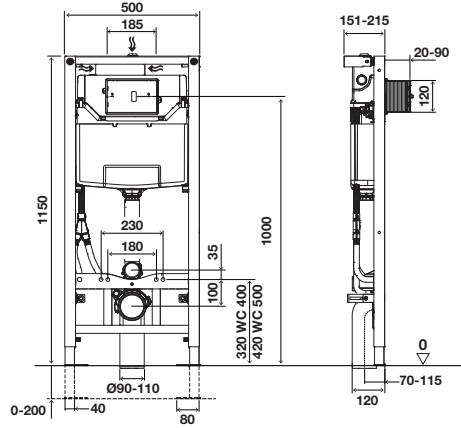

SPECIFIC FEATURES


- Pre-assembled structure for installation in front of masonry wall and finish in light wall, plasterboard or wood walls and technical support rail for light wall;
- Prepared for shower toilet installation;
- Pipe in pipe connection D18-25mm;
- 151mm thick;
- In accordance with the SINTEF standard.

cod. **887456** Mechanic Azor



OLI120 PLUS

Free-standing

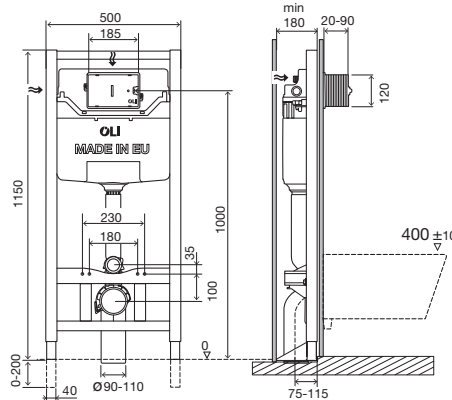

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Drywall installation;
- Frame fixed to the floor;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- 180mm thick.

cod. **099952** Mechanic Azor


cod. **099951** Pneumatic Azor

cod. **885847** Mechanic NF Azor



OLI120 PLUS

Height Adjustable Sanitarblock

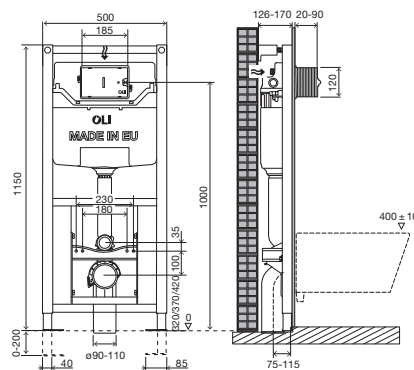

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Allows the height adjustment of the toilet fixation in three different positions before closed the wall, between 320, 370, 420mm;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- 126mm thick.

cod. **154083** Mechanic Azor



OLI120 PLUS HAPPY AIR

Sanitarblock

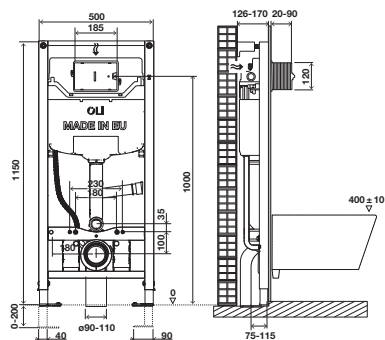



SPECIFIC FEATURES

- Wall-hung toilets up to 660mm long;
- Flush pipe for happy air system;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- 126mm thick.



cod. 883016 Mechanic Azor

HAPPY AIR

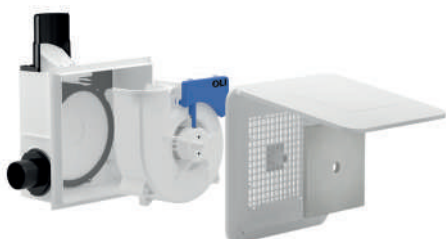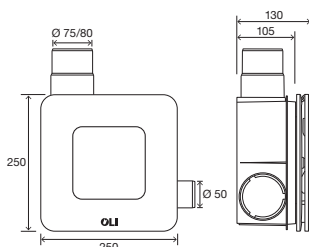


SPECIFIC FEATURES

- High extraction capacity (80m³/h);
- Removes 30% of odours;
- Removes 70% of condensation;
- Melanine filter – noise reduction;
- Turns off as soon as the client turns off the switch;
- 220V/50Hz;
- Capacity 65m³/h22W 31dB(A);
- Capacity 80m³/h29W 35dB(A).



cod. 887583

HAPPY AIR PLUS

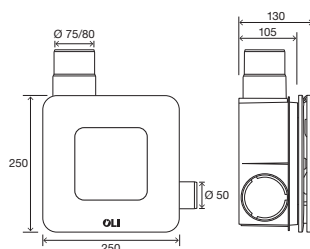

SPECIFIC FEATURES


- High extraction capacity (100m³/h);
- Removes 30% of odours;
- Removes 70% of condensation;
- Melanine filter – noise reduction;
- 960 Lumen LED that can be turned on independently of the extractor;
- Humidity sensor that can be set to automatically turn on;
- Possible to adjust the operating time after the user switches the switch off (2min-20min);
- Capacity 100m³/h12W 34dB(A);
- Capacity 80m³/h20W 38dB(A).



cod. 887588

OLI120 DOUBLE FRAME

WC | URINAL/WASHBASIN

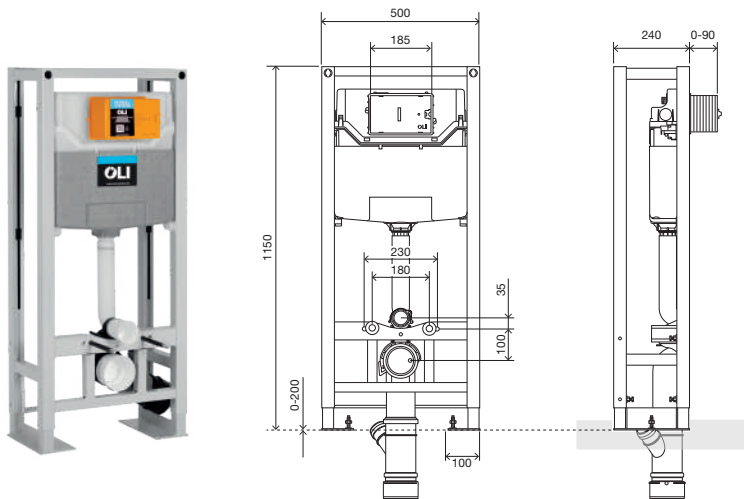


SPECIFIC FEATURES

- Frame with cistern and urinal or washbasin installed back-to-back;
- Freestanding double frame;
- Wall-hung toilets up to 660mm long
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- 240 mm thick.



cod. **882618** Azor

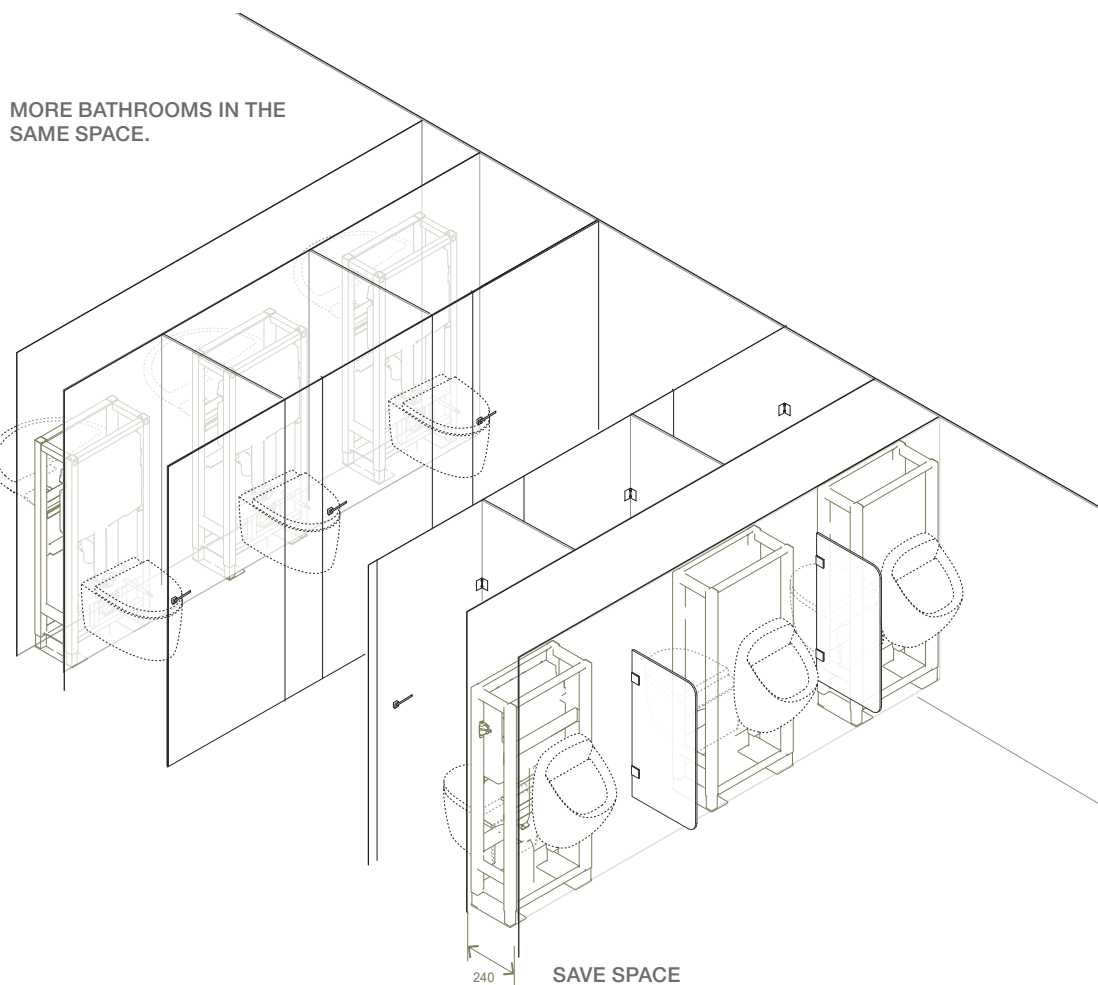


MORE BATHROOMS IN THE SAME SPACE.

SAVE SPACE


Wall thickness require only 240mm

Independently of the bathroom, this product allows to place in one side a toilet and on the other side, a urinal or a washbasin, according to the acquisition of the kits and by sharing the same waste pipe connection, thanks to the evacuation pipe in Y shape. It is prepared to be fix to the floor suitable for plasterboard wall in technical frame.


TOILET + WAHSBASIN WITH WALL MOUNTED TAP

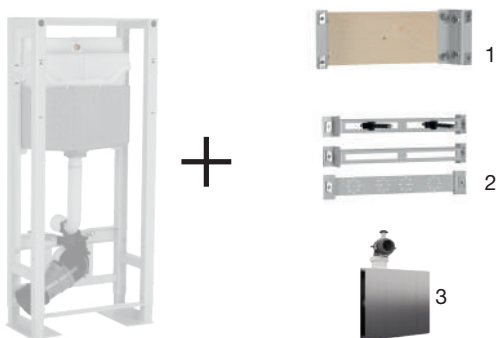


TOILET + WASHBASIN

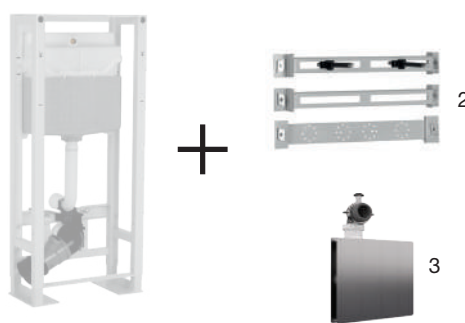


TOILET + URINAL

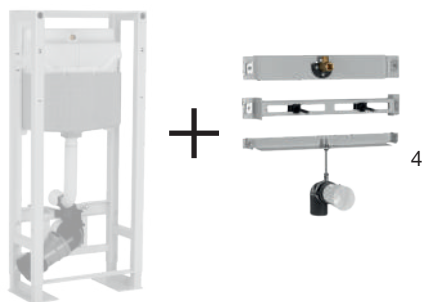

TOILET + URINAL WITH FLUXOMETER

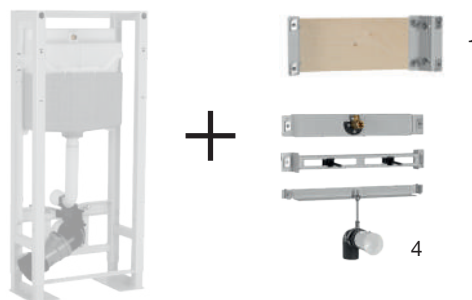

1



2

WALL TAP/CONCEALED FLUSH VALVE

- Compatible with all taps and urinal concealed flush valve;
- Adjustable mounting wood panel;
- Fixing material.

cod. **881858**

WASHBASIN KIT FOR DOUBLE FRAME

- Easy and quick installatiion;
- Washbasin fixing material;
- Compatible with wall-hung washbasins;
- Outlet bend Ø40 32/50mm.

cod. **882613**



3



4

CONCEALED SIPHON

- Compatible for double frame with washbasin kit;
- Outlet bend Ø32-32mm;
- Wall plate can be customized.

cod. **883081**

URINAL KIT FOR DOUBLE FRAME

- Easy and quick installatiion;
- Urinal fixing material;
- Outlet bend Ø40 32/50mm
- G ½" fitting for water connection.

cod. **882612**

ACCESSORIES IN-WALL CISTERNS OLI120 PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

154084

Pneumatic Conversion Kit




- Pre-installation of the electric AC connection is needed;
- Transformer is supplied.

COD

878293

Ac conversion kit




- Uses the energy of water in motion;
- No need to connect to the power grid;
- **Suitable for intensive use.**

COD

878294

Hydroboost conversion kit



- Pre-installation of the electric connection is needed;
- Transformer is not supplied;
- Compatible: ELECTRA III flush plate.

COD

154085

Electronic conversion kit



- Compatible with Glam flush plate.

COD

882129

OLIPURE kit



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD

889944

AMBIWAVE




- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x180;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD

885108

Eccentric set connection 25mm



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass connector



- Accoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Accoustic insulation for Wall-hung toilet and bidet



- Accoustic insulation in expanded polyethylene;
- Avoids direct contact between the washbasin and tile.

COD

620072

Washbasin protection sponge



- Allows the connection between the cistern and the shower toilet;
- 1 flexible hose 1200mm;
- 2 flexible hose 3/8" x 3/8" 160mm;
- 1 stop valve 1/2" x 1/2";
- 1 brass connection (T).

COD

191887

SHT kit without shower




- Can be installed after the cistern is installed inside the wall.

COD

883088

Flow rate reducer

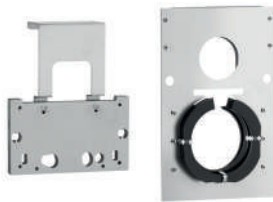

THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2'16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.

COD



879808

Stop Fire



- Compatible with OLI120 BLOCK;
- Fixing accessories included.

COD

886820

Floor support system



- WC outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD

075413

Happy air kit PLUS



- Transform any OLI120 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air Plus fan.

COD

887588

Happy air kit



- Transform any OLI120 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air fan.

COD




887583

Happy air kit




PART NUMBER GUIDE OLI120 PLUS

	 Mechanic	 OLIpure	 Pneumatic	 Electronic	 Hydroboost	 AC	 HAPPY AIR
OLI120 PLUS Direct 	885049 Nano 099941 Azor	-	153964 Azor	-	-	-	-
OLI120 PLUS Block 	885050 Nano 151339 Azor	-	885053 Nano 154076 Azor	-	-	-	-
OLI120 PLUS Sanitarblock 	885052 Nano 099949 Azor	880780 Azor	885055 Nano 177306 Azor	177305 Azor	878846 Azor	878621 Azor	883016 Azor Fan 887583 Fan Plus 887588
OLI120 PLUS Height Adjustable Sanitarblock 	154083 Azor	-	-	-	-	-	-
OLI120 PLUS Sanitarblock NORDIC 	887456 Nano	-	-	-	-	-	-
OLI120 PLUS Free-standing 	099952 Azor 885847 NF Azor	-	099951 Azor	-	-	-	-
OLI120 PLUS Double Frame 	882618 Azor	-	-	-	-	-	-

									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
670x150x460	3.563	1	-	3.563	45	1.28	0.82	2.46	180.335
487x165x1079	6.422	1	-	6.422	28	1.2	1.01	2.3	199.816
487x165x1079	6.422	1	-	6.422	28	1.2	1.01	2.3	199.816
1180x140x530	16.135	1	-	16.135	20	1.2	0.8	2.48	342.7
1180x140x530	16.135	1	-	16.135	20	1.2	0.8	2.48	342.7
1180x140x530	15.939	1	-	15.939	20	1.2	0.8	2.35	338.78
1176x256x545	23.167	1	-	23.167	6	1.2	0.8	1.25	159.002

OLI74 PLUS

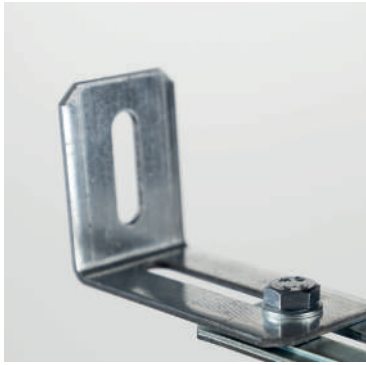

ADJUSTABLE METAL SUPPORT

The metal links are fixing supports to rely confidence during the installation of the cistern. Besides ensuring a higher resistance on the fixation, it increase the margin of adjustment according to the wall thickness.



FIXATION FEET

The fixation feet are adjustable in 150mm, allowing an easy installation of the cistern. For a regulation up to 300mm, OLI as a kit to help. See page 53.



ADJUSTABLE WASTE PIPE CURVE

Polypropylene curve, that connects the toilet to the waste pipe is adjustable in 45° and also adjustable in depth to match the construction site waste pipe.

Compatibility

Wide range of flush plates

	<p>Moon </p>	<p>Glassy </p>									

OLI74 PLUS

PLUS
Saves up to 9l of water per day

SILENT VALVE CLASS 1 CERTIFIED

2 INLET VALVES
Allows you to connect the cistern to a second water source.

Minimum thickness

OUTLET BEND
Fine adjustment of the outlet bend

HEIGHT ADJUSTABLE
in 150mm

SUPPORTS UP TO 400KG

FLUSH PLATE
Wide range of flush plates and actuations: mechanical, pneumatic, electronic and no-touch

FLUSH VOLUME
Dual flush: 6/3L.
Adjustable to 4/2L or 4.5/3L.



HAPPY AIR
Fresh solution for air renewal

INSTALLATION SYSTEM

- Brick-wall, for floor mounted toilets installation
- Brick-wall, for wall-hung toilets installation
- Drywall, for wall-hung toilets installation
- Drywall, for floor mounted toilets installation.

OLIPURE
Cleans and sanitizes the toilet

MAXIMUM HYGIENE, MAXIMUM FRESHNESS

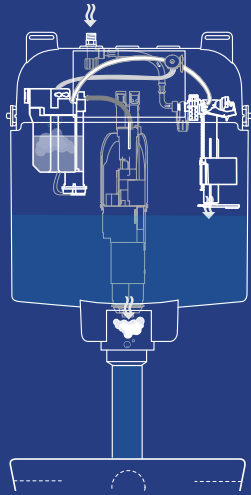


OLIpure®

OLIpure creates a fresh atmosphere and provides an immediate feeling of comfort and cleanliness, effortlessly.

It is a safe and innovative internal system (concealed within the cistern) that releases 2ml of cleaning liquid with each flush, in a controlled manner. This liquid stands out for being kept in a closed circuit, unlike traditional tablets placed inside the cistern.


OLIpure keeps the water and the cistern components protected and is easy to refill, ensuring long life and efficiency.

HOW TO SAVE WATER IN YOUR CISTERN SYSTEM

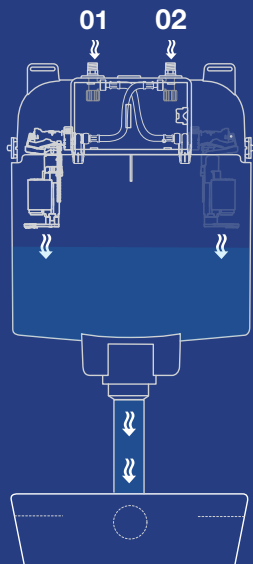

CISTERN WITH 2 INLET VALVES

This flushing cistern is distinguished by having two water inlet valves in its architecture. One for drinking water from the mains and another for non-potable water designed for rainwater (1) but applicable to other waters (boreholes water or water wells) ensuring that only clear and filtered water (2) is used. In this way it's possible to reuse rainwater for toilet flushing, saving drinking water that is essential for human consumption. It allows a more efficient use of the water resource and a saving in the water bill.

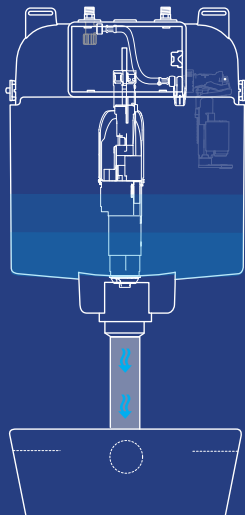


4/2 L

The combination of a 4-litre (full flush) and 2-litre (half flush) flush tank and an efficient and suitable toilet for this purpose results in immediate water savings.



OLI74 PLUS

OLIpure range

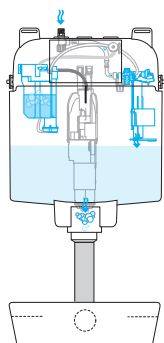

It is compatible with disinfectant liquids* available on the market and has a storage capacity of 450ml.

OLIpure is available in the OLI74 range and allows for an upgrade only on OLI120 Plus and Expert Plus products already installed with a separately sold kit.

SPECIFIC FEATURES

- General Features of the OLI74 PLUS cistern or installation type on page 72;
- Mechanical flush plate;
- Internal hygienic system;
- 3/8" brass side tap.




*It is recommended to use liquid detergents without chlorine and with a viscosity between 150 and 300 cp (at 20°C). cp stands for "centipoise", a unit of measurement for viscosity.

cod. **880784** Mechanic OLIpure Sanitarblock S90 Azor

OLI74 PLUS 2 inlet valves

Mechanic

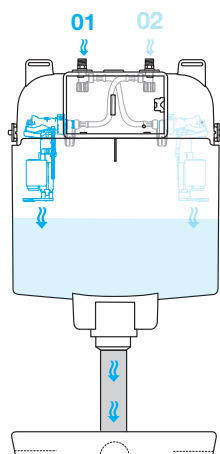

SAVE 100% of drinking water on toilet flushing.

Exclusive connection to a second source of water ^(a,b)

SAVE 50% of drinking water on toilet flushing.

Connection to mains water +
Connection to a second water source^(a,b)



^(a) This flushing cistern is distinguished by having two water inlet valves in its architecture.

01 One for drinking water from the mains


02 Another for non-potable water designed for rainwater but applicable to other waters (boreholes water or water wells) ensuring that only clear and filtered water is used^(b).

In this way it's possible to reuse rainwater for toilet flushing, saving drinking water that is essential for human consumption. It allows a more efficient use of the water resource and a saving in the water bill.

cod. **885057** Mechanic S90 Sanitarblock 2 inlet valves Nano

OLI74 PLUS 4/2 L

Mechanic

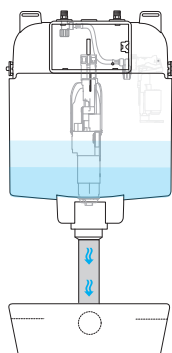

SAVE WATER IN BOTH FLUSHES (FULL AND HALF FLUSH)*

SAVE 2L in each full flush

SAVE 1L in each half flush.



*When compared to 6/3 litres cisterns.

cod. **885056** Mechanic 4/2l S90 Sanitarblock Nano

The HAPPY AIR system is the solution for air renewal in windowless bathrooms.


The high-powered extractor allows unpleasant odours to be extracted directly from the WC through the discharge pipe, while condensation is removed through a sleek and discreet plate installed on the wall or ceiling.

This system removes 30% of odours from the WC and 70% of the condensation present in the bathroom.



OLI74 PLUS HAPPY AIR

S90 Sanitarblock

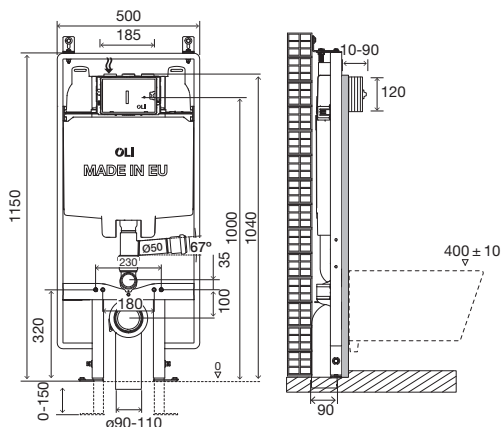


cod. 881821 Azor

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Flush pipe for happy air system;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 150mm;
- 90mm thick.



HAPPY AIR

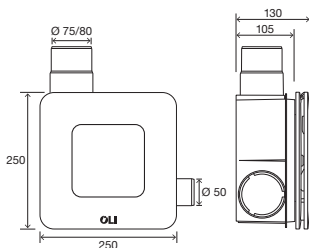


SPECIFIC FEATURES

- High extraction capacity (80m³/h)
- Removes 30% of odours
- Removes 70% of condensation
- Melanine filter – noise reduction;
- Turns off as soon as the client turns off the switch;
- 220V/50Hz;
- Capacity 65m³/h22W 31dB;
- Capacity 80m³/h29W 35dB.



cod. 887583

HAPPY AIR PLUS

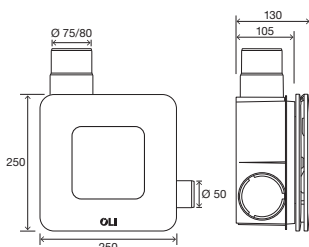

SPECIFIC FEATURES

- High extraction capacity (100m³/h)
- Removes 30% of odours
- Removes 70% of condensation
- Melanine filter – noise reduction;
- 960 Lumen LED that can be turned on independently of the extractor;
- Humidity sensor that can be set to automatically turn on;
- Possible to adjust the operating time after the user switches the switch off (2min-20min);
- Capacity 100m³/h12W 34dB(A);
- Capacity 80m³/h20W 38dB(A).



cod. 887588

OLI74 PLUS

Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4/2L and 4.5/3L);
- Versions available: mechanical, pneumatic, electronic, hydroboost and AC.
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Upon request some versions compliant with: SABS/SAL-WATERMARK/WRAS/KIWA/UPC/SASO/KIWAUK;
- EN 14055 CE Marking;
- Compatible with all floor and wall-hung mounted toilets;
- Inlet valve with delayed and silent opening PLUS system;
- Brick-wall installation.

INCLUDES IN ALL VERSIONS

- Wall fixing kit;
- G 1/2" stop valve;
- Inlet and outlet toilet connection;
- Toilet fixing material (when applicable);
- Outlet bend and Ø90/110 adaptor (when applicable);
- Sanitary ware fixing material (when applicable).

OLI74 PLUS

Direct

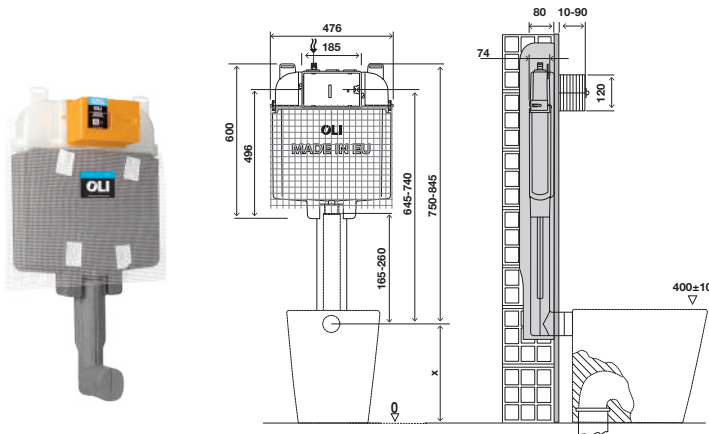

SPECIFIC FEATURES

- Compatible with all floor toilets;
- Brick-wall installation;
- 80mm thick.


* installation available with the application of the kit 216640 (page 53)



- cod. **885062** Mechanic Nano
- cod. **884203** Pneumatic Nano
- cod. **601601** Mechanic Azor
- cod. **601602** Pneumatic Azor

OLI74 PLUS

Simflex

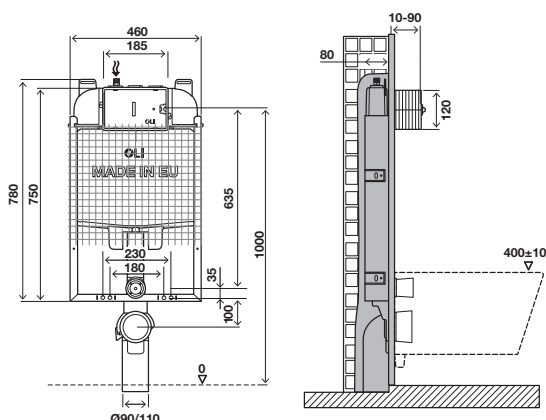

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall installation;
- 80mm thick.



- cod. **885069** Mechanic Nano
- cod. **884228** Pneumatic Nano
- cod. **601901** Mechanic Azor
- cod. **002332** Pneumatic Azor


OLI74 PLUS

S90 Sanitarblock

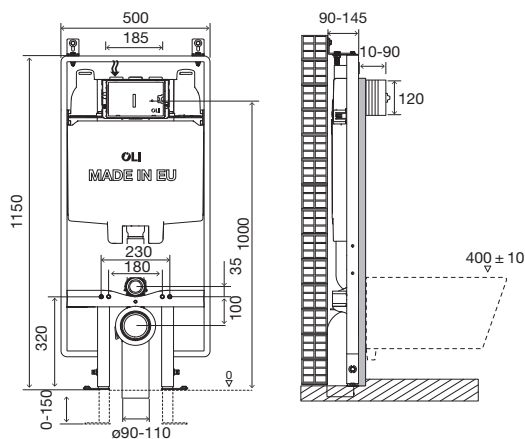

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall or drywall installation;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 150mm;
- Option kit to adjust until 300mm;
- 90mm thick.

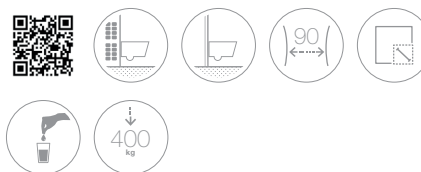

- cod. **880784** Mechanic OLIpure Azor
- cod. **878655** Cap AC Azor
- cod. **878840** Cap Hydroboost Azor
- cod. **187650** Electronic Azor
- cod. **885056** Mechanic 4/2l Nano
- cod. **216248** Mechanic 4/2l Azor
- cod. **885057** Mechanic 2 inlet valves Nano
- cod. **880799** Mechanic 2 inlet valves Azor
- cod. **883134** Mechanic Nano
- cod. **601803** Mechanic Azor
- cod. **884235** Pneumatic Nano
- cod. **187649** Pneumatic Azor

OLI74 PLUS

Free-standing

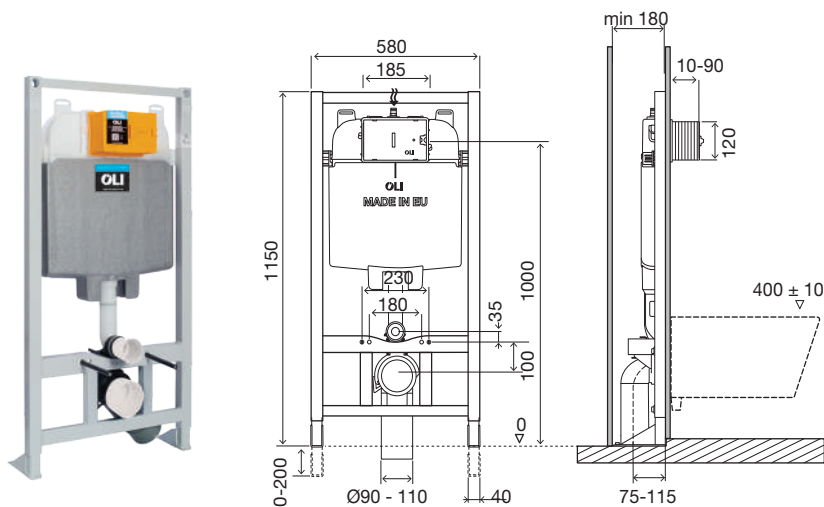

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Drywall installation;
- Depth adjustable outlet bend;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- 180mm thick.



cod. **601822** Mechanic Azor

OLI74 PLUS

Free-standing Double

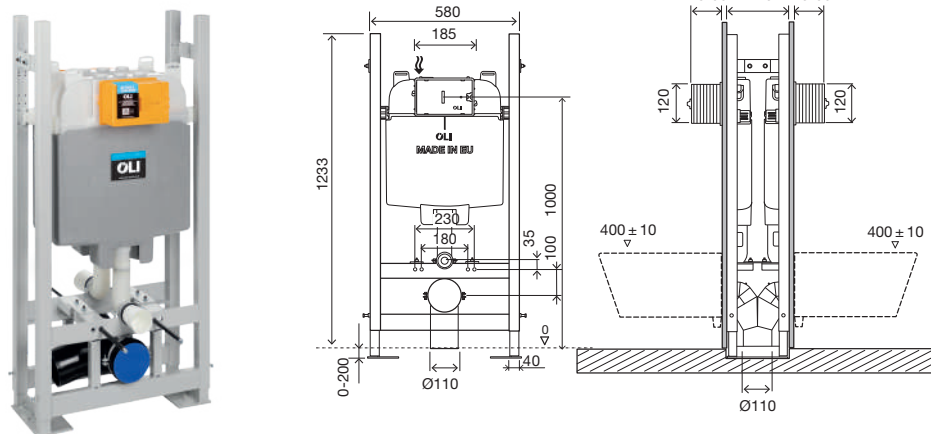

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Frame for back-to-back wall-hung toilet with two in-wall cisterns;
- Outlet bend Ø110;
- 240mm thick.



cod. **885061** Mechanic Nano

cod. **600859** Mechanic Azor



ACCESSORIES IN-WALL CISTERNS OLI74 PLUS



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

601527

Pneumatic Conversion Kit



- Pre-installation of the electronic connection is needed;
- Transformer is supplied.

COD

878292

Ac conversion kit



- Uses the energy of water in motion;
- No need to connect to the power grid;
- **Suitable for intensive use.**

COD

878285

Hydroboost conversion kit



- Pre-installation of the electrical connection is needed;
- Transformer is not supplied;
- Compatible: ELECTRA III flush plate.

COD

077754

Electronic conversion kit



- Compatible with Glam flush plate.

COD

882129

Olipure kit



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD

889944

AMBIWAVE



- Compatible with Simflex frames;
- Fixing accessories included.

COD

886820

Floor support system



- Foot extension set 300mm;
- Solution to increase height adjustment.

COD

885109

Foot extension S90 oli74 plus



- Fixation kit for OLI74 PLUS;
- 1 Clamp;
- 2 Support fixation.

COD

216640

Drywall fixing kit



- Can be installed after the cistern is installed inside the wall.

COD

106572

Flow rate reducer



- Double outlet bend for wall-hung toilets with horizontal installation.

COD

622022

90/110

622023

110/110



- Outlet pipe $\text{Ø}90 \times \text{Ø}125 \times 250$;
- Rubber seal for outlet pipe $\text{Ø}125$;
- Connection WC pipe $\text{Ø}45 \times 180$;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass conector



- Outlet pipe Ø90xØ125x300;
- Rubber seal for outlet pipe Ø125;
- Connection WC pipe Ø45x280;
- Rubber seal for WC pipe Ø45;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD

885108

Eccentric set connection 25mm



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110




- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Acoustic insulation for Wall-hung toilet and bidet

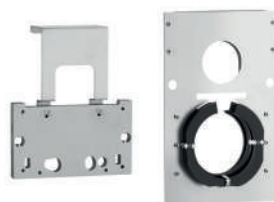

THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2'16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.

COD



879808

Stop Fire



- Double outlet bend for wall-hung toilets with vertical installation.

COD

111238

double outlet bend vertical



- Transform any OLI74 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air Plus fan.

COD

884340

Happy air kit PLUS



- Transform any OLI74 PLUS in-wall cisterns with this KIT;
- 1 Outlet pipe connection;
- 1 Happy Air fan.

COD

884339

Happy air kit

















- WC outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.




COD

075413

wc outlet bend

PART NUMBER GUIDE OLI74 PLUS

	 Mechanic	 4/2L	 2 inlet valves	 OLipure	 Pneumatic	 Electronic	 Hydroboost	 AC	 HAPPY AIR
OLI74 PLUS Direct 	885062 Nano 601601 Azor	-	-	-	884203 Nano 601602 Azor	-	-	-	-
OLI74 PLUS Simflex 	885069 Nano 601901 Azor	-	-	-	884228 Nano 002332 Azor	-	-	-	-
OLI74 PLUS S90 Sanitarblock 	883134 Nano 601803 Azor	885056 Nano 216248 Azor	885057 Nano 880799 Azor	880784 Azor	884235 Nano 187649 Azor	187650 Azor	878840 Azor	xxxxx Nano 878655 Azor	881821 Azor Fan 887583 Fan Plus 887588
OLI74 PLUS Free-standing 	601822 Azor	-	-	-	-	-	-	-	-
OLI74 PLUS Free-Standing Double 	885061 Nano 600859 Azor	-	-	-	-	-	-	-	-


									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
586x126x692	3.665	1	0	3.665	45	1.2	1	2.2	184.925
910x150x640	6.749	1	0	6.749	26	1.28	0.81	2.23	195.474
1180x140x530	12.433	1	0	12.433	20	1.2	0.8	2.35	268.66
1175x165x631	16.698	1	0	16.698	16	1.2	0.84	2.229	287.168
1305x306x670	33.478	1	0	33.478	7	1.31	0.8	2.383	254.346

EXPERT PLUS





ADJUSTABLE METAL SUPORT

The metal links are fixing supports to rely confidence during the installation of the cistern. Besides ensuring a higher resistance on the fixation, it increase the margin of adjustment according to the wall thickness.

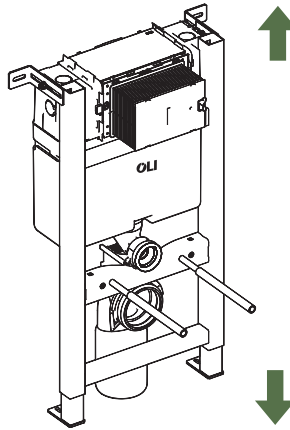

820MM HEIGHT


Expert Plus 820mm version guarantees the bathroom installations of toilets under window, stairs or in attic. This reduced height in-wall cistern prove to be reliable: perfect bathrooms with windows over the toilet.

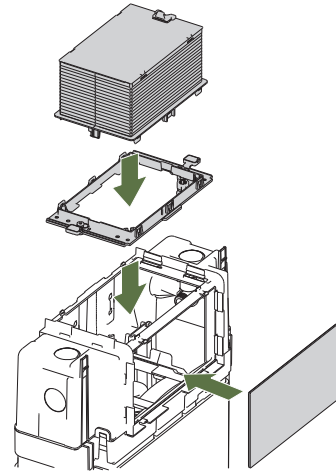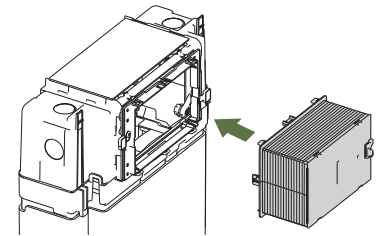

FRONT OR TOP ACTUATION

Usually the space above the toilet is more difficult to use. Build a shelf and install a floor mounted toilet or wall-hung toilet. With Expert Plus it is now possible to install the flush plates on the top or in front of the cistern.

Compatibility
Wide range of flush plates

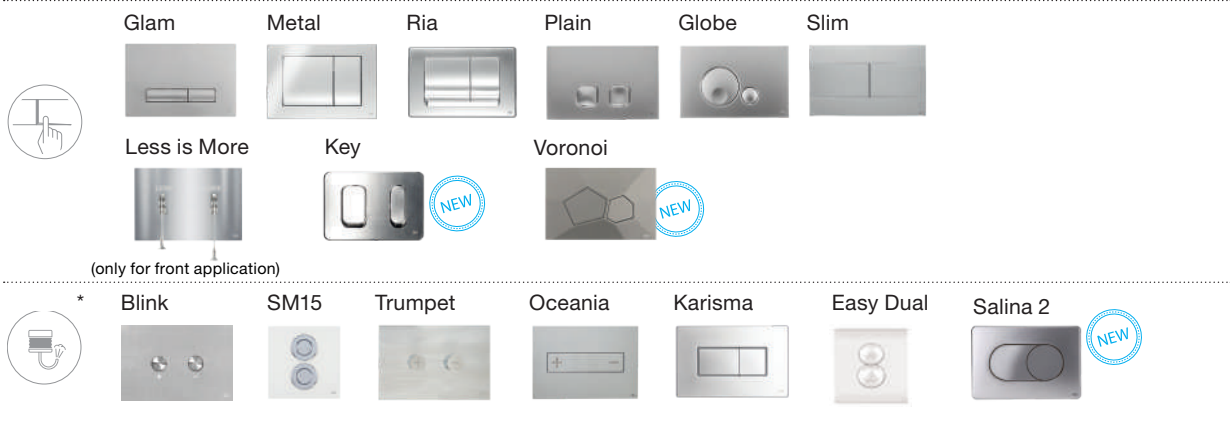

*With the respective transformation kits.

EXPERT PLUS



APPLICATION
Lower installation
and additional top
actuation

FLUSH PLATE

Wide range of flush plates and
actuators: mechanical and
pneumatic



PLUS
Saves up to 9l of
water per day

**SILENT VALVE
CLASS 1
CERTIFIED**



FLUSH VOLUME
Dual flush: 6/3L
Adjustable to 4/2L or 7/3L



**SUPPORTS UP TO
400KG**



OLIPURE
Cleans and sanitizes the
toilet

OUTLET BEND
Fine adjustment
of the outlet bend

INSTALLATION SYSTEM



Brick-wall, for floor
mounted toilets installation



Brick-wall, for wall-hung
toilets installation



Drywall, for wall-hung
toilets installation




**HEIGHT
ADJUSTABLE**
in 200mm



EXPERT PLUS

Complete range



*Note: For top application, ensure a minimum distance between the finished wall and the flush plate of 30mm.

GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4/2L or 7/3L);
- Top or front actuation/access;
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Mechanic or pneumatic actuation;
- Upon request some versions compliant with: Sai-Watermark/NF/Belgaqua/KIWAUK/WRAS certification;
- EN 14055 CE marking;
- Brick-wall installation;
- Lower/under bench installation possible;
- Inlet valve with delayed and silent opening PLUS system;
- 150mm thick.

INCLUDES IN ALL VERSIONS

- Wall fixing kit;
- G 1/2" stop valve;
- Inlet and outlet toilet connection;
- Toilet fixing material (when applicable);
- Outlet bend and Ø90/110 adaptor (when applicable);
- Sanitary ware fixing material (when applicable).

EXPERT PLUS

Direct

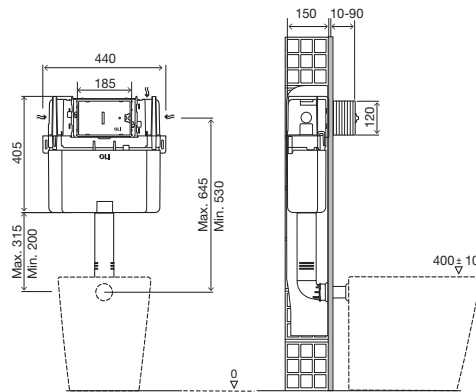

SPECIFIC FEATURES


- Compatible with all floor mounted toilets;
- Brick-wall installation;
- Lower/under bench installation possible;
- 150mm thick.



cod. **721003** Mechanic Azor
cod. **721005** Pneumatic Azor

EXPERT PLUS

Simflex 820

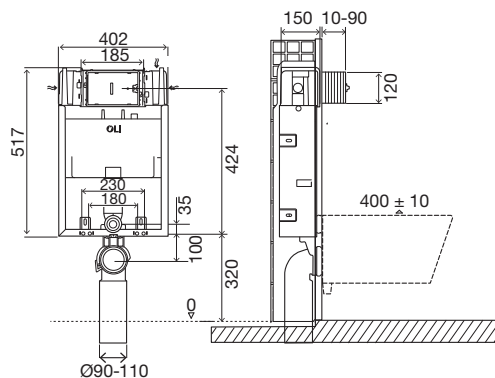

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall installation;
- Lower/under bench installation possible;
- 150mm thick.



cod. **076456** Mechanic Azor
cod. **141960** Pneumatic Azor

EXPERT PLUS

Sanitarblock 820

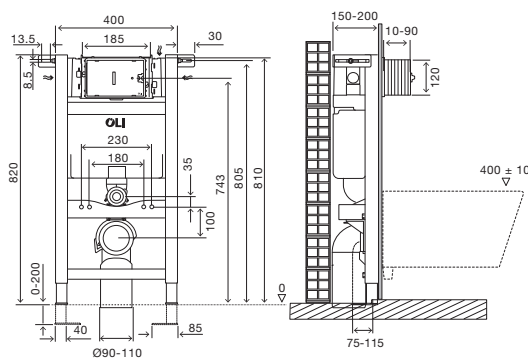

SPECIFIC FEATURES


- Compatible with all wall-hung toilets;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation possible;
- 150mm thick.



- cod. **885065** Mechanic Nano
- cod. **885067** Pneumatic Nano
- cod. **721703** Mechanic Azor
- cod. **721705** Pneumatic Azor
- cod. **880787** Mechanic OLIpure Azor

EXPERT PLUS

Free-standing 820

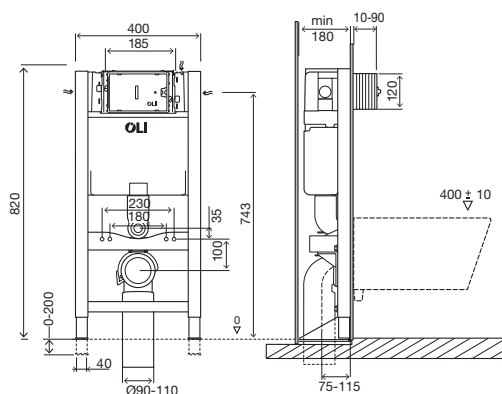

SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- Lower/under bench installation possible;
- 180mm thick.



- cod. **014092** Mechanic Azor
- cod. **048375** Pneumatic Azor

ACCESSORIES IN-WALL CISTERNS EXPERT PLUS




- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

0035148

Pneumatic Conversion Kit



- Compatible with top actuation flush plates: Glam, Globe and Plain.

COD

211743

Mechanic conversion kit for top actuation



- Outlet valve mechanical anchors;
- Levers set.

COD

30497

Mechanic conversion kit EXPERT PLUS



- Compatible with Glam flush plate;
- Ambiwave liquid not included;
- Compatible with Expert Plus model (only front actuation)

COD

882129

Olipure kit



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD

889944

AMBIWAVE



- Can be installed after the cistern is installed inside the wall.

COD

106572

Flow rate reducer



- Outlet pipe $\text{Ø}90 \times \text{Ø}125 \times 250$;
- Rubber seal for outlet pipe $\text{Ø}125$;
- Connection toilet pipe $\text{Ø}45 \times 180$;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Outlet pipe $\text{Ø}90 \times \text{Ø}125 \times 300$;
- Rubber seal for outlet pipe $\text{Ø}125$;
- Connection WC pipe $\text{Ø}45 \times 280$;
- Rubber seal for WC pipe $\text{Ø}45$;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- Polypropylene (PP) material;
- Adaptor to match with $\text{Ø}110$.

COD

086360

Outlet bend adaptor $\text{Ø}90/110$ 

- Accessory sets to enable the correction of incorrect applications;
- Toilet connection $\text{Ø}90$;
- Connection WC pipe $\text{Ø}45 \times 180$.

COD

885108

Eccentric set connection 25mm



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass connector



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Acoustic insulation for Wall-hung toilet and bidet

ACCESSORIES IN-WALL CISTERNS EXPERT PLUS



- Compatible with Simflex frames;
- Fixing accessories included.

COD

059272

Floor support system




- The ideal solution for overcoming obstacles;
- For use with Expert Plus and Quadra Plus cisterns, you must also purchase the pipe with 021266.

COD

622401

Flexible pipe extension 613mm

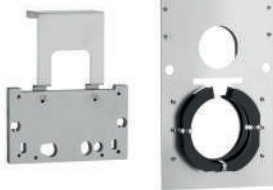

THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2*16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.

COD



879808

Stop Fire







- WC outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD


075413

wc outlet bend

	Mechanic	OLIpure	Pneumatic	Icon 1		Icon 2			Icon 3				
				WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
EXPERT PLUS Direct 	721003 Azor	-	721005 Azor	566x166x545	3.457	1	0	3.457	35	1.2	0.9	1.961	140.995
EXPERT PLUS Simflex 820 	076456 Azor	-	141960 Azor	775x448x176	7.327	1	0	7.327	30	1.2	0.8	2.12	239.81
EXPERT PLUS Sanitarblock 820 	885065 Nano 721703 Azor	880787 Nano	885067 Nano 721705 Azor	845x191x525	10.721	1	0	10.721	24	1.23	0.85	2.26	277.304
EXPERT PLUS Free-standing 820 	014092 Azor	-	048375 Azor	845x191x525	15.042	1	0	15.042	24	1.23	0.85	2.26	381.008



QUADRA PLUS

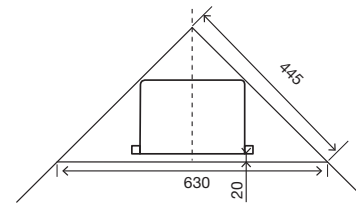

FAST-FIT

Fast-Fit is a system that provides a fixation to the load bearing walls and allows for a fast and precise levelling of the frame.




REDUCED DIMENSIONS

Quadra Plus, thanks to its 300mm reduced width, fits in all bathrooms.



CORNER KIT

With acquisition of corner kit, Quadra Plus is ideal for corner installations. See page 69.

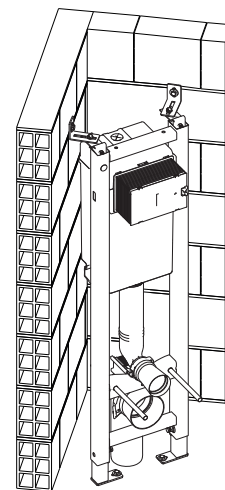

Compatibility
Wide range of flush plates

	Glam	Metal	Ria	Plain	Ino-X	Oceania	Globe
	Slim	Less is More	Voroi	Key			
	Blink	SM15	Trumpet	Oceania	Karisma	Easy Dual	Salina 2

QUADRA PLUS


FAST-FIT SYSTEM


PLUS

Saves up to 9l of water per day


400 kg


SUPPORTS UP TO 400KG

REDUCED WIDTH
It can be installed in all bathrooms

OUTLET BEND
Fine adjustment of the outlet bend


HEIGHT ADJUSTABLE

in 200mm

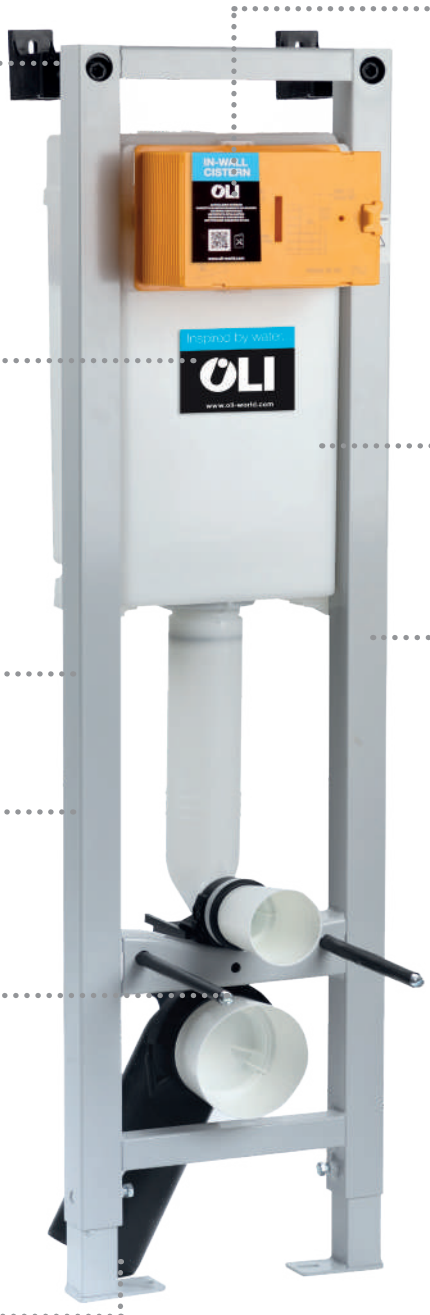



FLUSH PLATE
Wide range of flush plates and actuations: mechanical, and pneumatic




FLUSH VOLUME
Dual flush: 6/3L

INSTALLATION SYSTEM

 Brick-wall, for floor mounted toilets installation

 Brick-wall, for wall-hung toilets installation

 Drywall, for wall-hung toilets installation



IDEAL FOR CORNER APPLICATION
Necessary acquisition of the kit on page 69.

QUADRA PLUS

Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern;
- Compatible with Mechanical and Pneumatic flush plates;
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Upon request some versions compliant with: NF certification;
- EN 14055 CE marking;
- Compatible with all floor and wall-hung mounted toilets;
- Inlet valve with delayed and silent opening PLUS system;
- 187 mm thick.

INCLUDES IN ALL VERSIONS

- 215mm flush pipe;
- G 1/2" stop valve;
- Toilet connection pipe Ø45;
- Sanitary ware fixing material (when applicable).

QUADRA PLUS

Direct

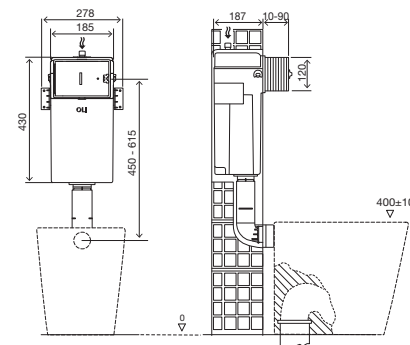

SPECIFIC FEATURES


- Compatible with all floor toilets;
- Brick-wall installation;
- 278mm reduced width;
- 187mm thick.



- cod. **720002** Mechanic Azor
 cod. **037172** Pneumatic Azor

QUADRA PLUS

Sanitarblock

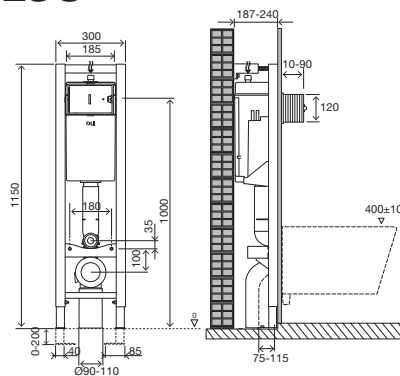

SPECIFIC FEATURES


- Compatible with wall-hung toilets with a 180mm fixation length;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation with Fast-Fit system;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width;
- 187mm thick.



- cod. **885060** Mechanic Nano
 cod. **885058** Pneumatic Nano
 cod. **135974** Mechanic Azor
 cod. **141945** Pneumatic Azor

QUADRA PLUS

Free-standing

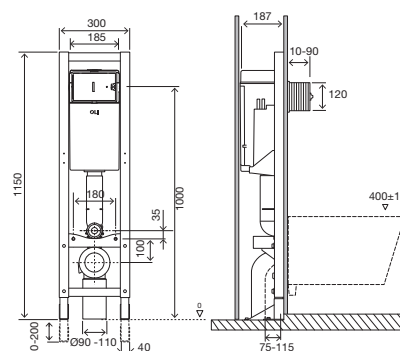


SPECIFIC FEATURES

- Compatible with wall-hung toilets with a 180mm fixation length;
- Drywall installation;
- Frame tested for a 400kg load;
- Easy and quick installation;
- Depth adjustable outlet bend;
- Height adjustable from 0 to 200mm;
- 300mm reduced width;
- 187mm thick.



- cod. **722021** Mechanic Azor
 cod. **187103** Pneumatic Azor

ACCESSORIES IN-WALL CISTERNS QUADRA PLUS

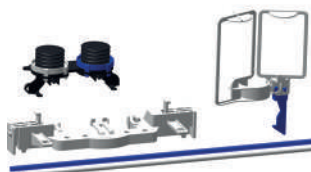

- 2 pneumatic pipes with 1.5m length;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

101773

Pneumatic Conversion Kit



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110



- Accoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Accoustic insulation for Wall-hung toilet and bidet




- Ideal for corner application.

COD

719183

Corner Kit Sanitarblock



- The solution to overcome obstacles;
- For EXPERT and QUADRA PLUS an additional flush pipe is needed (Code 021266).

COD

622401

Flexible pipe extension 613mm



- Outlet pipe Ø90xØ125x250;
- Rubber seal for outlet pipe Ø125;
- Connection toilet pipe Ø45x180;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection Ø90;
- Connection WC pipe Ø45x180.

COD

885108

Eccentric set connection 25mm




- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass conector

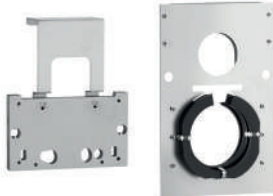

THE STOP FIRE CAN BE A DECISIVE ELEMENT IN A FIRE SAFETY STRATEGY.

- Application for flush plates and in wall-cisterns;
- Steel painted with polyester powder fitted with special intumescent inserts
- 27% mineral graphite and rated B2 according to DIN 4102;
- Compliant with EN 13501-2:2'16;
- Compatible with: OLI74 Plus, OLI120 Plus, QUADRA Plus and EXPERT Plus*;
- Compatible with: Glam, Globe and Plain flush plates.

COD



879808

Stop Fire











- Toilet outlet bend for wall-hung toilets;
- L:300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD

075413


Toilet outlet bend

PART NUMBER GUIDE QUADRA PLUS

	 											
	Mechanic	Pneumatic	WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
QUADRA PLUS Direct 	720002 Azor	037172 Azor	286x205x610	2.802	1	0	2.802	64	1.2	0.83	2.6	199.328
QUADRA PLUS Sanitarblock 	885060 Nano 135974 Azor	885058 Nano 141945 Azor	1179x228x340	11.546	1	0	11.546	21	1.2	0.8	2.22	262.466
QUADRA PLUS Free-standing 	722021 Azor	187103 Azor	1179x228x340	12.634	1	0	12.634	20	1.2	0.8	2.42	272.68



OLI80




ONE MAN ASSEMBLY

Assembly can be done by only one person, allowing for a fast and precise levelling of the frame.



BLOCKADE

According to the scenario of construction site, the fixation feet have 3 positions and a metal block to adjust to the intended position.

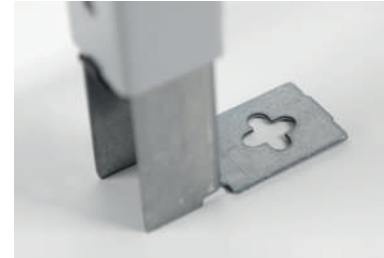

FIXATION FEET

The fixation feet have a cross drilled to increase the margin of the holes, facilitating the installation.



FAST-FIT

Fast-Fit is a system that provides a fixation to the load bearing walls and allows for a fast and precise levelling of the frame.

Compatibility
Wide range of flush plates



Glam



Metal



Ria



Slim



Globe



Plain



Key



OLI80



FAST-FIT SYSTEM



COST-BENEFIT RANGE

FLUSH PLATE

Compatible with a wide range of mechanical actuation flush plates



FLUSH VOLUME

Dual flush: 6/3L
Adjustable to 4.5/3L

POLYPROPYLENE (PP)
Highly resistant to ambient temperatures;



SUPPORTS UP TO 400KG

INSTALLATION SYSTEM



Brick-wall, for floor mounted toilets installation



Brick-wall, for wall-hung toilets installation



Drywall, for wall-hung toilets installation

OUTLET BEND

Fine adjustment of the outlet bend




HEIGHT ADJUSTABLE
in 200mm



ONE MAN ASSEMBLY

Foot locking system

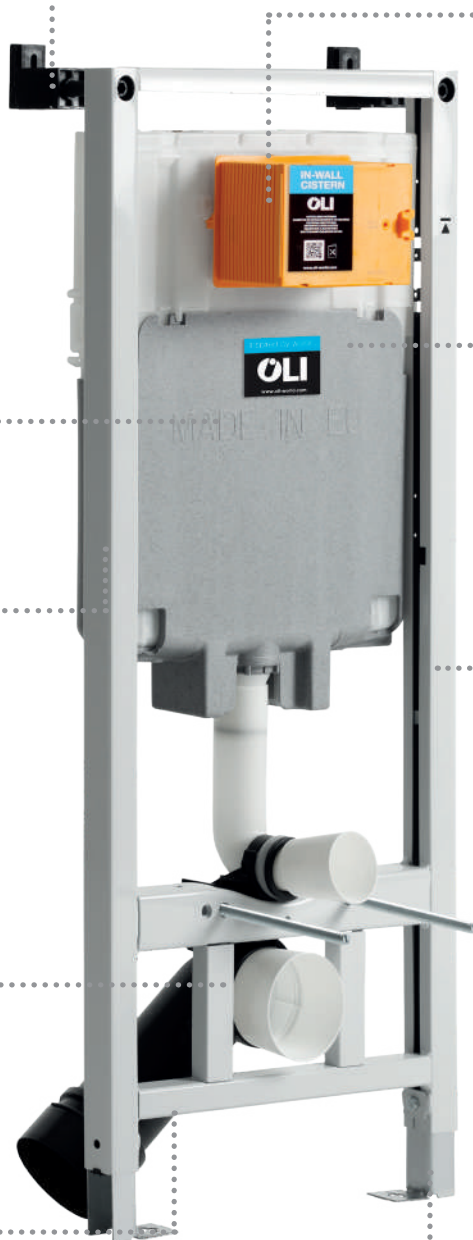

OLI80

Complete range



GENERAL FEATURES FOR ALL VERSIONS


- Dual flush 6/3L in-wall cistern (adjustable to 4.5/3L);
- Cistern made of polypropylene (PP), highly resistant to ambient temperatures;
- Mechanical actuation;
- Upon request compliant with: Belgaqua certification;
- EN 14055 CE marking;
- Compatible with all floor and wall-hung mounted toilets.

INCLUDES IN ALL VERSIONS

- Flush pipe;
- Wall fixing kit;
- Net for easier grout adhesion;
- G 1/2" stop valve;
- WC connection pipe Ø45;
- Sanitary ware fixing material (when applicable).

OLI80

Direct

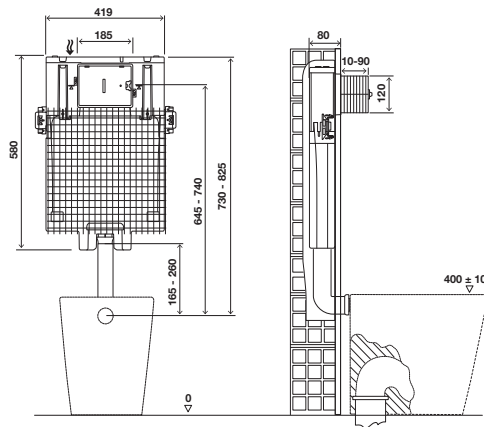

SPECIFIC FEATURES


- Compatible with all floor mounted toilets;
- Flexible pipe height 430 to 840mm;
- Brick-wall installation;
- 80mm thick.



cod. **885070** Mechanic Nano

OLI80

Squat pan

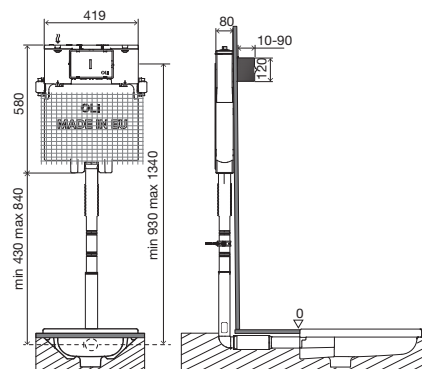


SPECIFIC FEATURES

- Compatible with all toilet at floor level or floor mounted;
- Flexible pipe height 430 to 840mm;
- Brick-wall installation;
- 80mm thick.



cod. **045058** Mechanic Nano

OLI80 Simflex

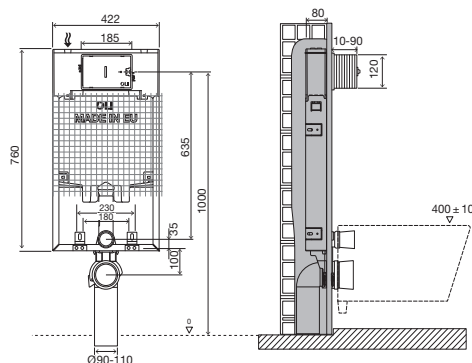


SPECIFIC FEATURES

- Compatible with all wall-hung toilets;
- Brick-wall installation;
- Outlet bend Ø90;
- 80mm thick.



cod. **885110** Mechanic Nano
cod. **600251** Mechanic Azor

OLI80 Sanitarblock

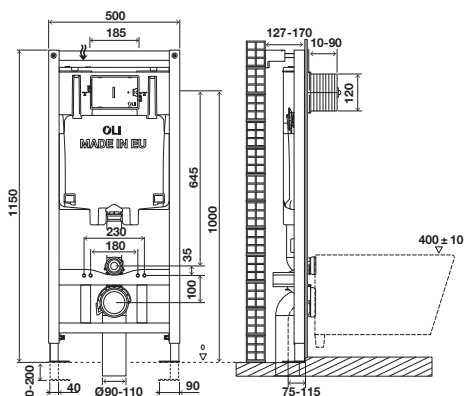


SPECIFIC FEATURES

- Wall-hung toilets up to 660mm long;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- Brick-wall or drywall installation;
- 120mm thick.



cod. **885111** Mechanic Nano
cod. **600151** Mechanic Azor

OLI80 Sanitarblock seawater

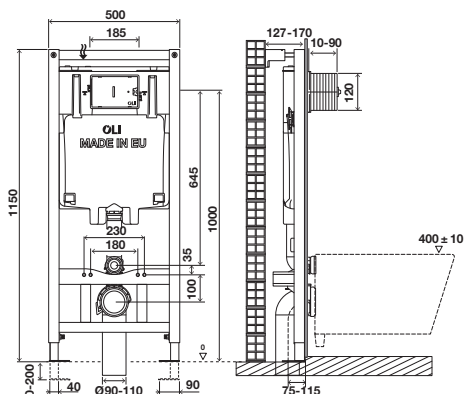

SPECIFIC FEATURES

- Wall-hung toilets up to 660mm long;
- Frame tested for a 400kg load;
- Depth adjustable outlet bend;
- Easy and quick installation with fast fit system;
- Height adjustable from 0 to 200mm;
- One man assembly;
- Brick-wall or drywall installation;
- 127mm thick.
- Flushing cistern without any metal components, prepared to be used with seawater and prevent a risk of corrosion.



cod. **885232** Mechanic Azor

ACCESSORIES IN-WALL CISTERNS OLI80



- Can be installed after the cistern is installed inside the wall.

COD

106572

Flow rate reducer



- Compatible with OLI Simflex frames;
- Fixing material included.

COD

886820

Floor support system



- Outlet pipe $\text{Ø}90 \times \text{Ø}125 \times 250$;
- Rubber seal for outlet pipe $\text{Ø}125$;
- Connection Toilet Connection Pipe $\text{Ø}45 \times 180$;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection $\text{Ø}90$;
- Connection WC pipe $\text{Ø}45 \times 180$.

COD

885108

Eccentric set connection 25mm



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass connector



- Polypropylene (PP) material;
- Adaptor to match with $\text{Ø}90/110$.

COD

086360

Outlet bend adaptor $\text{Ø}90/110$



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Acoustic insulation for Wall-hung toilet and bidet




- Outlet pipe $\text{Ø}90 \times \text{Ø}125 \times 300$;
- Rubber seal for outlet pipe $\text{Ø}125$;
- Connection WC pipe $\text{Ø}45 \times 280$;
- Rubber seal for WC pipe $\text{Ø}45$;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- The solution to overcome obstacles;
- For EXPERT and QUADRA PLUS an additional flush pipe is needed (Code 021266).

COD

622401

Flexible pipe extension 613mm



- Compatible with Simflex frames;
- Fixing accessories included.











COD

059272

Floor support system




Inspired by water
OLI
www.oli-world.com

	 Mechanic	 Seawater										
			WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
 OLI80 Direct 885070 Nano	-	-	595x130x700	3.805	1	0	3.805	36	1.2	0.8	2.29	156.98
 OLI80 Squat pan 045058 Nano	-	-	595x130x700	4.18	1	0	4.18	36	1.2	0.8	2.29	170.48
 OLI80 Simflex 885110 Nano 600251 Azor	-	-	916x166x565	5.091	1	0	5.091	22	1.2	0.9	1.99	132.002
 OLI80 Sanitarblock 885111 Nano 600151 Azor	-	-	1180x140x530	13.143	1	0	13.143	20	1.2	0.8	2.35	282.86
 OLI80 Sanitarblock Salt water -	885232 Azor	-	1180x140x530	13.072	1	0	13.072	20	1.2	0.8	2.35	281.44






EASY MOVE	84
SANITARY MODULE	89

 Brick-wall, wall-hung toilet

 Brick-wall, washbasin

 AC power-mains


 Supports up to 400kg

 Drywall, wall-hung toilet

 Drywall, washbasin

 Reduced mobility

 Supports up to 150kg


 Pneumatic actuation

OPTIMISE YOUR SPACE


WITH SANITARY MODULE SOLUTIONS

GOOD REASONS TO REDESIGN THE BATHROOM


Walls do not need to be open for installation;
Existing water connections can be used;
A modern design in every bathroom.

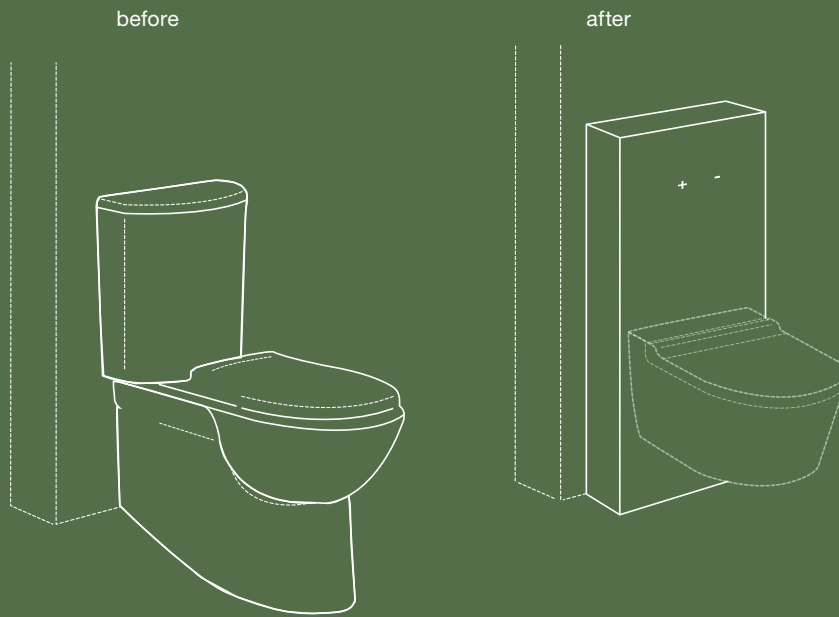

QR-INOX

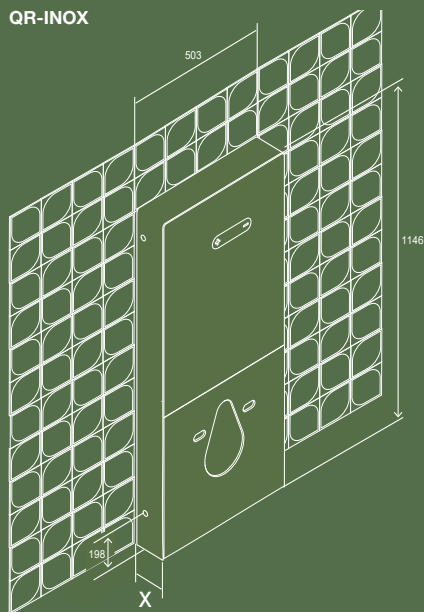

SEAL BOX

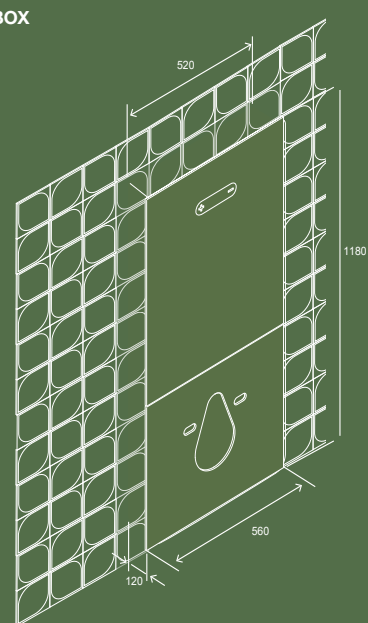


* X = 108mm for floor-mounted or wall-hung version;
190mm for free-standing version.



A BATHROOM FOR EVERYONE

WITH EASY MOVE SOLUTIONS

Committed to developing a safe and comfortable bathroom for all, OLI has several solutions designed for people with reduced mobility, the elderly and children. The Easy Move range was developed to facilitate the day-to-day at home, and in spaces like nursing homes, hospitals, shopping centers or airports.

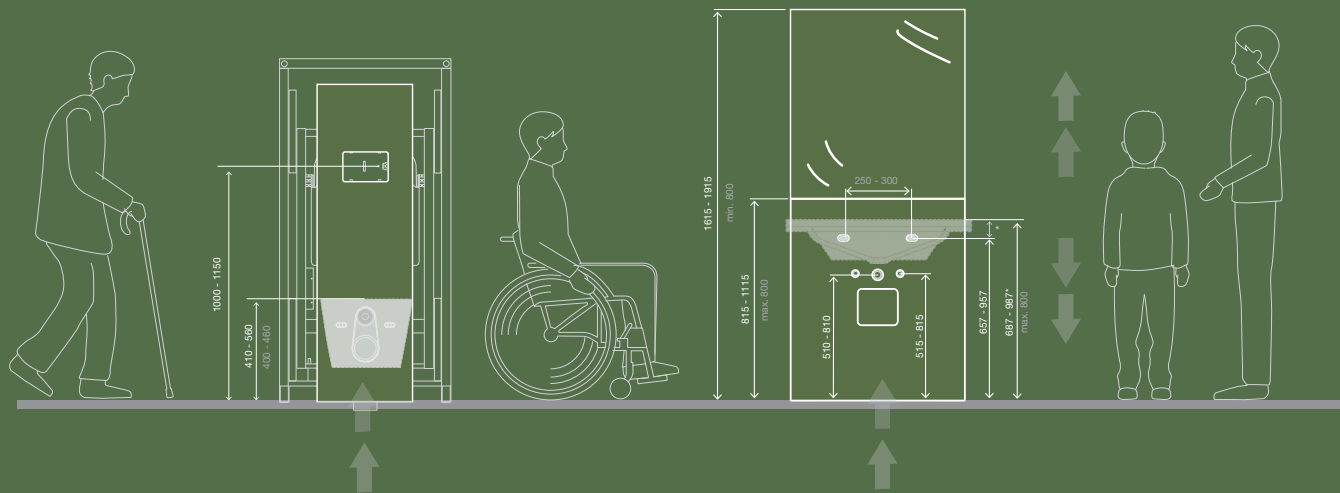

- EASY MOVE'S DIMENSIONAL RANGE
- DIMENSIONAL RANGE ACCORDING TO STANDARDS



FINISHES AVAILABLE

The product is available in both black and white tempered glass with 6mm of thickness.



FLEXIBLE OUTLET BEND

This is the component responsible for connecting the Easy Move to the sewer. Made of EPDM, a resistant plastic to the continuous, with a width of 150mm.




SILENT MOVEMENT

The engine exerts a lifting force and the sound of the engine is almost imperceptible during operation. Also the engine is extremely powerful with a thrust of more than 600kg offering maximum reliability. The movement speed is of 28mm per second, allowing the toilet to move quickly along the frame.



EASY MOVE WC

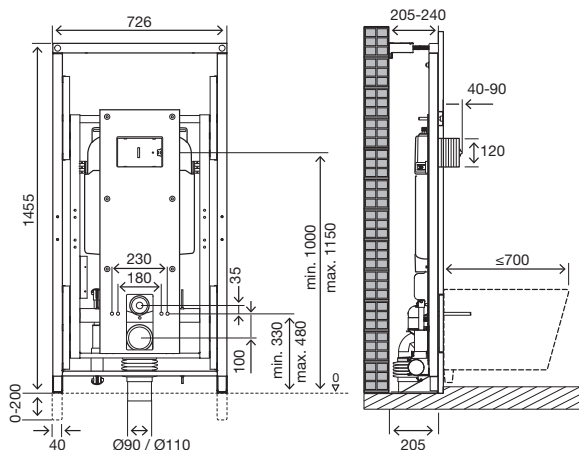

GENERAL FEATURES

- Adjustable frame with OLI74 Plus dual flush cistern 6/3L;
- Ergonomic system that is adjustable in height by 150mm;
- Compatible with all wall-hung toilets;
- Silent electric engine;
- Power supply: 220V/110 (50/60Hz);
- Power: 120 Watt;
- Insulation rating: IP66;
- Movement velocity of: 28mm/s;
- Push power: 6000N (ca 600kgf);
- Traction power 3000N (ca 300kgf);
- Limit switch;
- Frame tested for a 400kg load;
- Easy and quick installation with fast fit system;
- Available tempered glass front cover in black or white (6x400x1345mm);
- Frame and glass are sold separately;
- Flush plate and glass not included.

INCLUDES

- Wireless remote control;
- Wall-fixing material and toilet fixing material;
- Inlet and outlet toilet connection;
- Flexible overflow pipe;
- Adaptor Ø90/110.



- cod. **048159** EASY MOVE WC
- cod. **021408** Glass Black
- cod. **021409** Glass White
- cod. **879143** Lift-up support rails

EASY MOVE WC

FAST-FIT SYSTEM
Allows a quick and easy adjustment

FINISHES
Tempered glass available in white or black

FLUSH PLATE
Wide range of flush plates and actuations: mechanical, pneumatic, electronic and no-touch

WIRELESS REMOTE CONTROL

SUPPORTS UP TO 400KG

SUPPORT RAILS
Product is already prepared to receive support bars

INSTALLATION SYSTEM
Brick-wall, for wall-hung toilets installation
Drywall, for wall-hung toilets installation

FLEXIBLE OUTLET PIPE
Flexible pipe that accompanies the adjustment of the height of the toilet.


Compatibility
Wide range of flush plates

	Moon 	Glassy 		Electra III 	eLINE 	Key 	
	Blink 	Trumpet 	Oceania 	SM15 	Karisma 	Salina 2 	
	Glam 	Metal 	Ria 	Ino-X 	Globe 	Less is More 	Plain
	Oceania 	Slim 	Key 	Voronoi 			



FINISHES AVAILABLE

The product is available in both black and white tempered glass with 6mm of thickness.

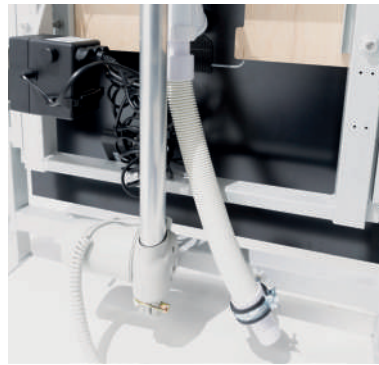

SILENT MOVEMENT

The motor exerts a lifting force and its sound is almost imperceptible during operation. The speed of movement is 28mm per second, allowing the washbasin to move safely along the frame.



HIDDEN SIPHON

For hidden washbasin connections of $\varnothing 32$, this concealed siphon guarantees the maintenance access through magnets.

EASY MOVE

Washbasin




GENERAL FEATURES

- Adjustable frame for washbasin;
- Ergonomic system that is adjustable in height by 300mm;
- Compatible with the most wall-hung washbasins;
- Silent electric engine;
- Mains supply 220V/110 (50/60Hz);
- Power: 120 W;
- Insulation rating: IP66;
- Movement speed: of 28mm/s;
- Push power: 6000N (ca 600kgf);
- Limit switch;
- Frame tested for a 150kg load;
- Easy and quick installation with fast fit system;
- Available tempered glass front cover in black or white (6x700x810mm);
- Mirror and glass not included.

INCLUDES

- Concealed siphon;
- Wireless remote control;
- 2x G 1/2" water connections;
- 2x flexible hoses;
- Wall-fixing material and washbasin fixing material.

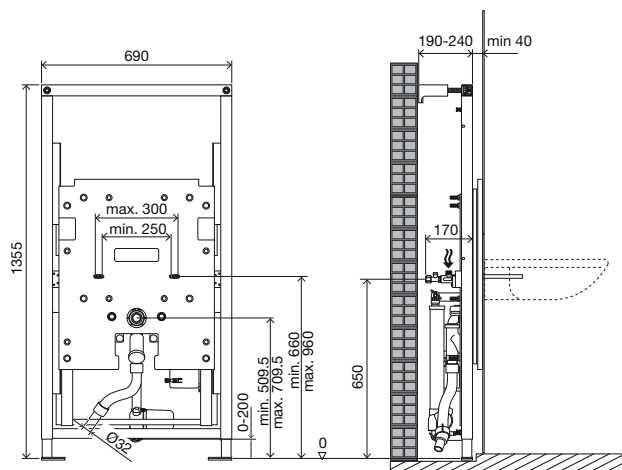

- cod. **881673** EASY MOVE Washbasin
- cod. **883045** White glass 6x700x810mm
- cod. **883046** Black glass 6x700x810mm
- cod. **883048** Mirror 6x700x800mm



EASY MOVE WASHBASIN



FAST-FIT SYSTEM
3 easy steps



ERGONOMIC SYSTEM
Adjustable in height by 300 mm

INSTALLATION SYSTEM

Brick-wall, for wall-hung toilets installation



Drywall, for wall-hung toilets installation



SUPPORTS UP TO 150KG

HIDEN SIPHON

Guarantees easy access for maintenance



WIRELESS REMOTE CONTROL





NO-TOUCH VERSION

The flush is activated with the approach of the hand, without touching the module, thanks to the use of capacitive sensors. The AC version, with connection of the sensors to the power grid, allowing the flush to be activated with the approach of the hand.



PNEUMATIC VERSION

Comes with a stainless steel swinging selector button in a brushed finish for activating the half flush and the complete flush. The button's rounded shape provides the sanitary modules with nobility and distinctiveness.



STAINLESS STEEL

The edge around the sanitary modules is made of one piece brushed stainless steel.



FLOOR MOUNTED TOILET

QR-Inox Floor is compatible with all floor mounted toilets available in the market.



WALL-HUNG TOILET

QR-Inox Hung toilet is compatible with all Wall-hung toilets available in the market*.



QR-INOX / SEAL BOX



FLUSH VOLUME
Dual flush: 6/3L.
Adjustable to 4.5/3L

SILENT VALVE CLASS 1 CERTIFIED




PLUS
Saves up to 9l of water per day

STAINLESS STEEL EDGE
One piece, brushed stainless steel frame



SUPPORTS UP TO 400KG

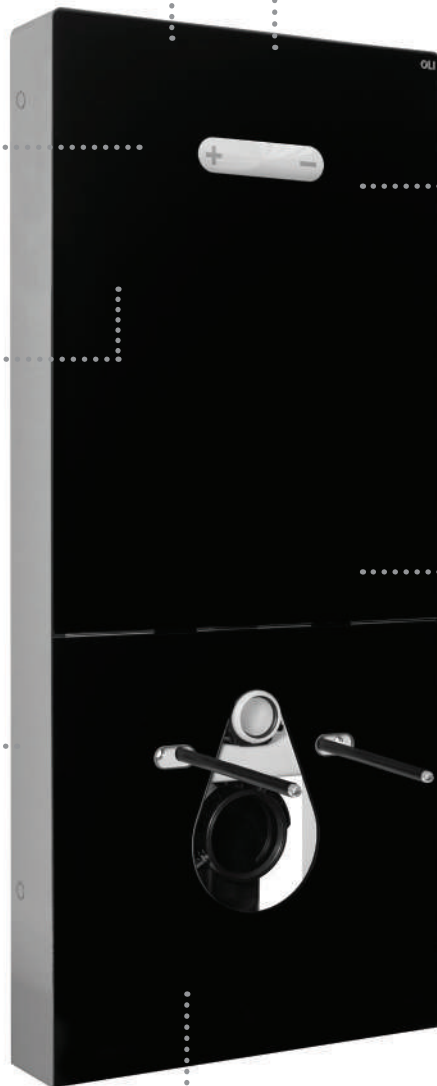

5 POSSIBLE WATER CONNECTIONS

Multiple water connections allow a higher adaptability to the installation requirement



PNEUMATIC


The pneumatic version comes with a stainless steel swinging selector button in a brushed finish for activation the flush

FINISHES

6mm tempered glass, bi-parting, available in white and black finish

QR-INOX

Wall-hung

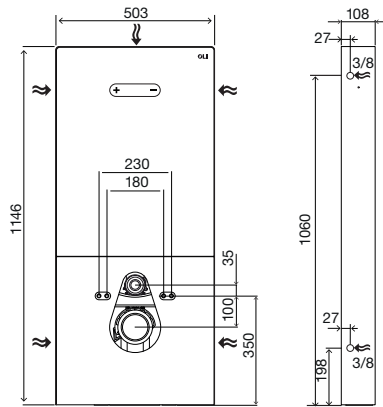

GENERAL FEATURES

- Dual flush Sanitary Module 6/3L;
- Compatible with all wall-hung toilets;
- Delayed refilling – PLUS technology inlet valve;
- 108mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Outlet bend and Ø90/110 adaptor;
- Toilet fixing material;
- EN 14055 CE marking.

INCLUDES IN ALL VERSIONS


- Internal frame fixing material;
- Inlet and outlet toilet connection;
- G 1/2" stop valve;
- Flexible hose 1/2" / 3/8", 250mm.



- cod. **061568** Black button Pneumatic
- cod. **878641** Black no-touch cap AC
- cod. **061565** White button Pneumatic
- cod. **878640** White no-touch cap AC

QR-INOX

Floor

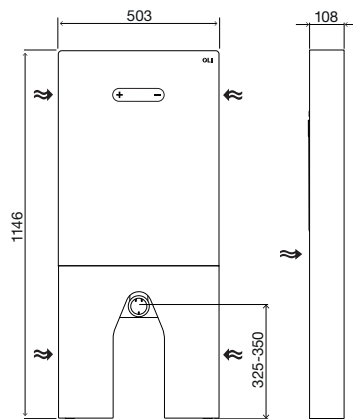

GENERAL FEATURES

- Dual flush Sanitary Module 6/3L;
- Compatible with all floor mounted toilets;
- Delayed refilling – PLUS technology inlet valve;
- 108mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Flexible outlet WC (min 220 to 570mm);
- EN 14055 CE marking;
- Solid and drywall installations.

INCLUDES IN ALL VERSIONS

- Internal frame fixing material;
- Inlet and outlet toilet connection;
- G 1/2" stop valve;
- Flexible hose 1/2" / 3/8", 250mm.




- cod. **061563** Black button Pneumatic
- cod. **878643** Black no-touch cap AC
- cod. **061562** White button Pneumatic
- cod. **878642** White no-touch cap AC



SEAL BOX

Wall-hung

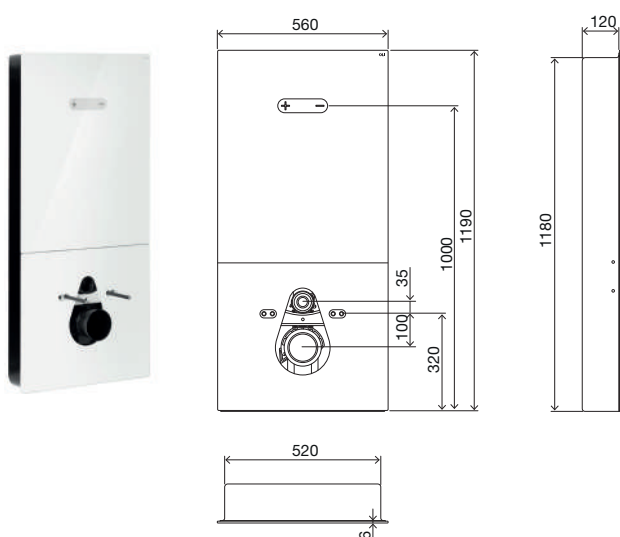

GENERAL FEATURES

- In-wall installation with glass front panel visible;
- Leakage prevention box in ABS and PMMA;
- Dual flush Sanitary Module 6/3L;
- Compatible with all wall-hung toilets;
- Brick-wall and drywall installations;
- Delayed refilling – PLUS technology inlet valve;
- 120mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Outlet bend and Ø90/110 adaptor;
- Toilet fixing material;
- EN 14055 CE marking.

INCLUDES IN ALL VERSIONS


- Internal frame fixing material;
- Inlet and outlet toilet connection;
- G 1/2" stop valve;
- Flexible hose 1/2" / 3/8", 250mm.



- cod. **880450** Black button Pneumatic
cod. **880372** White button Pneumatic

SEAL BOX

Floor

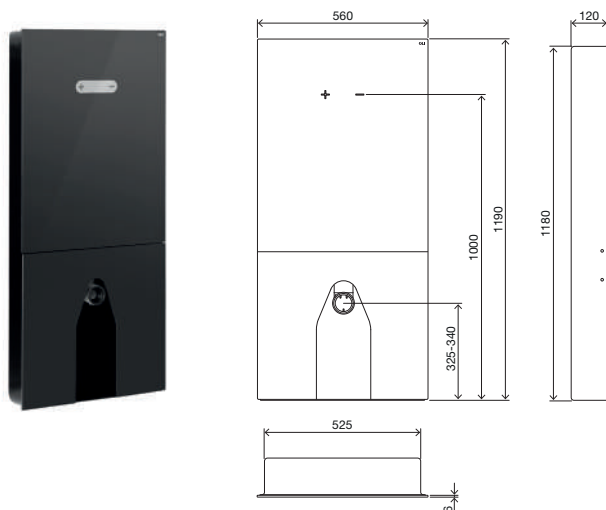

GENERAL FEATURES

- In-wall installation with glass front panel visible;
- Leakage prevention box in ABS and PMMA
- Dual flush Sanitary Module 6/3L;
- Compatible with all floor mounted toilets;
- Brick-wall and drywall installations;
- Delayed refilling – PLUS technology inlet valve;
- 120mm thick;
- Equipped with OLI74 Plus in-wall cistern;
- Flexible outlet WC (min 220 to 570mm);
- EN 14055 CE marking.



- cod. **880456** Black button Pneumatic
cod. **880455** White button Pneumatic

ACCESSORIES EASY MOVE RANGE



- 2 pneumatic pipes with 350mm;
- Outlet valve pneumatic anchors;
- Pneumatic bellows.

COD

601527

Pneumatic Conversion Kit



- Pre-installation of the electronic connection is needed;
- Power Supply included is supplied.

COD

878292

Ac conversion kit



- Uses the energy of water in motion;
- No need to connect to the power grid;
- **Suitable for intensive use.**

COD



878285

Hydroboost conversion kit



- Pre-installation of the electrical connection is needed;
- Power Supply is not included;
- Compatible: ELECTRA III flush plate.

COD

077754

Electronic conversion kit



- Brushed 304 stainless steel tube Ø 30 mm;
- Synthetic resin flange;
- Vertical locking;
- Maximum weight capacity, 120kg;
- Laboratory tests, 225kg.

COD

879143

Barras de apoio



ACCESSORIES SANITARY MODULES



- Polypropylene (PP) material;
- Adaptor to match with Ø90/110.

COD

086360

Outlet bend adaptor Ø90/110




- Length 175mm to 385mm;
- Exit Ø90/110;
- Toilet connection Ø90.

COD

108185

S-bend outlet toilet



- Length 220mm to 570mm;
- Exit Ø90/110;
- Toilet connection Ø80/100.

COD

079929

Flexible outlet bend toilet



- Hight 118mm;
- Exit Ø100;
- Toilet connection Ø90/110.

COD

881608

Eccentric 20mm




- Hight 125mm;
- Exit Ø110;
- Toilet connection Ø90/110.

COD

881613

Eccentric 40MM





- Length 300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD



108380

Horizontal outlet toilet

PART NUMBER GUIDE SANITARY MODULES

MODEL	 Pneumatic	 Cap AC
QR-INOX White □	061565 Hung wc	878640 Hung wc
	061562 Floor	878642 Floor
QR-INOX Black ■	061568 Hung wc	878641 Hung wc
	061563 Floor	878643 Floor
SEAL BOX White □	880372 Hung wc	-
	880455 Floor	-
SEAL BOX Black ■	880450 Hung wc	-
	880456 Floor	-

PART NUMBER GUIDE EASY MOVE RANGE

	Glass Black	Glass White	Mirror	Lift-up support rails
EASY MOVE WC 	EASY MOVE WC 048159	EASY MOVE WC 048159	-	879143
EASY MOVE WC Glass	GLASS 021408	GLASS 021409	-	879143
EASY MOVE WASHBASIN 	EASY MOVE WASHBASIN 881673	EASY MOVE WASHBASIN 881673	-	-
EASY MOVE WASHBASIN Glass	GLASS 883046	GLASS 883045	-	-
EASY MOVE WASHBASIN Mirror	-	-	883048	-



WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
687x517x100	25.67	1	-	25.67	5	1.2	0.8	1.57	148.35
687x517x100	20.873	1	-	20.873	5	1.2	0.8	1.57	124.365
697x529x90	25.65	1	-	25.65	5	1.2	0.8	1.57	148.25
687x517x100	22.005	1	-	22.005	5	1.2	0.8	1.57	130.025
1206x601x282	28.017	1	-	28.017	5	1.2	0.8	1.57	160.085
1206x601x282	24.945	1	-	24.945	5	1.2	0.8	1.57	144.725
730x571x100	25.917	1	-	25.917	5	1.2	0.8	1.57	149.585
1206x601x282	20.12	1	-	20.12	5	1.2	0.8	1.57	120.6

WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
1490x220x765	40.956	1	-	40.956	5	1.2	0.8	1.65	224.78
1420x66x495	9.176	1	-	9.176	10	1.2	0.8	0.85	111.76
1400x250x725	32.923	1	-	32.923	5	1.2	0.8	1.56	184.615
908x110x813	9.815	1	-	9.815	5	1.2	0.8	0.71	69.075
908x110x813	10.029	1	-	10.029	5	1.2	0.8	0.71	70.145





WC SANITARBLOCK	100
WC FREE-STANDING	100
CERAMIC SEPARATOR	101
URINAL DIVIDER	101
URINAL	101
WC FRAME	102
EASY	102
ECO WC/BIDET	103
BIDET SIMFLEX	103
BIDET SANITARBLOCK	104
WASHBASIN SIMFLEX	105
WASHBASIN SANITARBLOCK	105
SHOWER FRAME	106
CONCEALED SIPHON	106



Brick-wall, wall-hung toilet and bidet



Drywall, wall-hung toilet and bidet



Brick-wall, urinal



Drywall, urinal



Brick-wall



Drywall



Brick-wall, washbasin



Drywall, washbasin



One man assembly











Economic



Supports up to 400kg


COMPATIBILITY

COMPLEMENTARY FRAMES / SANITARY WARE


			WC 		URINAL 
		SANITARBLOCK	FREE-STANDING	FLUSH VALVE	SANITARBLOCK
		●		●	●
		●	●	●	●
					●
		●	●	●	
RIVER	BIDET				
	WC	●	●	●	
LAKE	BIDET				
	WC	●	●	●	
LAGOON	BIDET				
	WC	●	●	●	
KAI	URINAL				●
URINAL DIVIDER					



BIDE

					
SIMFLEX	ECO	SANITARBLOCK	SANITARBLOCK	FREE-STANDING	EASY
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		<input checked="" type="checkbox"/>
		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
					<input checked="" type="checkbox"/>
		<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	<input checked="" type="checkbox"/>				
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	<input checked="" type="checkbox"/>				
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	
	<input checked="" type="checkbox"/>				
					<input checked="" type="checkbox"/>

WC
Sanitarblock

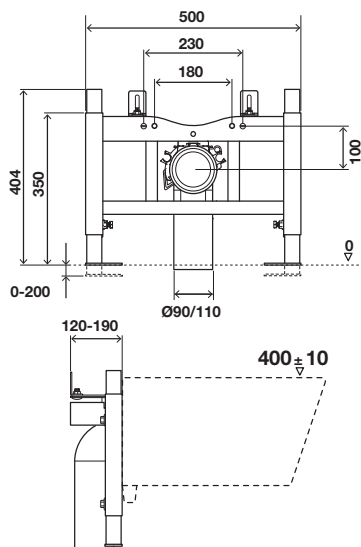

SPECIFIC FEATURES

- Compatible with wall-hung toilets;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 120mm thick.


INCLUDES

- Toilet fixing material;
- Frame fixing material;
- Outlet bend and Ø90/110 adaptor.



cod. 714001

WC
Free-standing

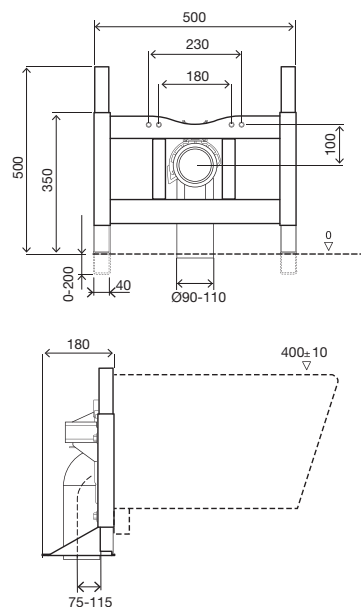

SPECIFIC FEATURES

- Compatible with wall-hung toilets;
- Drywall installation;
- Frame tested for a 400kg load;
- Height adjustable from 0 to 200mm;
- Depth adjustable outlet bend;
- 180mm thick.


INCLUDES

- Toilet fixing material;
- Frame fixing material (floor);
- Outlet bend and Ø90/110 adaptor.



cod. 616042

CERAMIC SEPARATOR

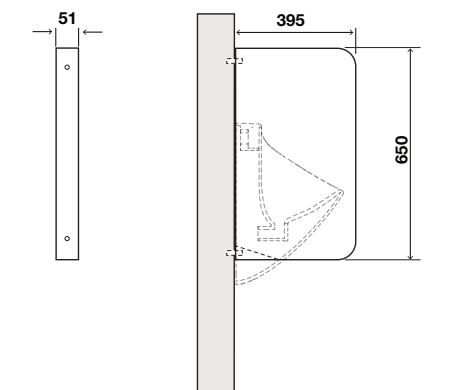

GENERAL FEATURES

- Material: Vitreous China;
- Hidden fixing;
- Shape: Rectangular;
- Compatible with the Easy structure.

INCLUDES


- Installation accessories.

cod. **RE30100889764** White

cod. **RE30100889765** Black



URINAL DIVIDER

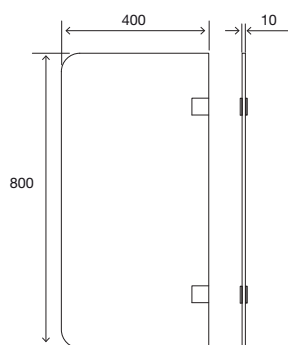


SPECIFIC FEATURES

- Frosted glass;
- Tempered Glass 8mm thick;
- Stainless steel fixing accessories;
- Fixation directly to the wall, drywall or Brick-wall;
- Compatible with Easy Structure.

INCLUDES

- Urinal divider fixing material.

cod. **000079**

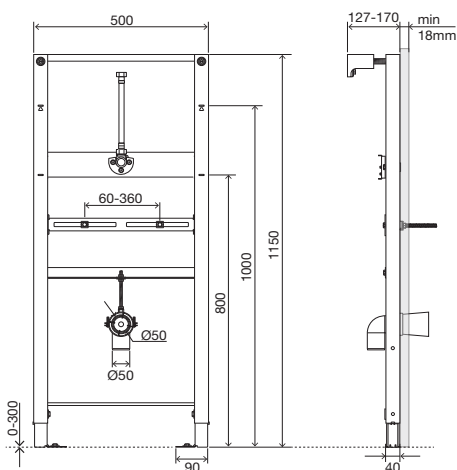Urinal
Sanitarblock

SPECIFIC FEATURES

- Frame for wall-hung urinals;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Frame tested for a 130kg load;
- Height adjustable from 0 to 200mm;
- Adjustable attachment plates;
- The flush valve has to be installed before closing the wall;
- One man assembly;
- Flush valve not Included;
- 120mm thick.


INCLUDES

- Frame fixing material;
- Outlet bend Ø 50/50;
- G ½" fitting for tap connection (adjustable);
- ½" flexible hose.



WC FRAME

Flush valve

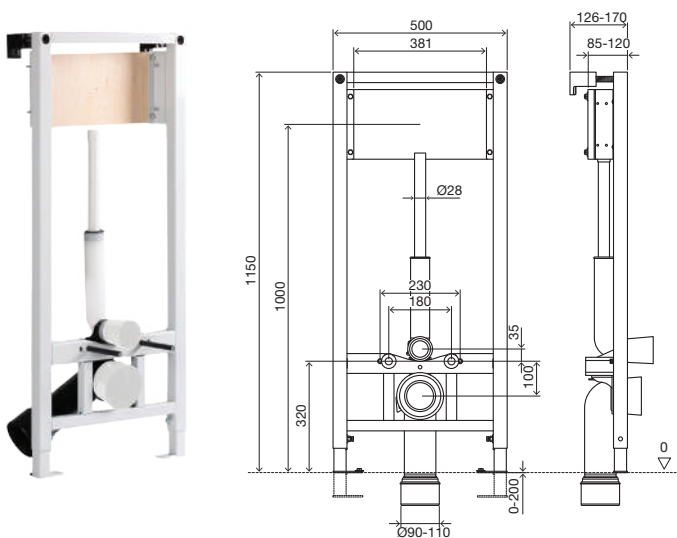

SPECIFIC FEATURES

- Compatible with wall-hung toilets;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Frame tested with 400kg load;
- Height adjustable from 0 to 200mm;
- Adjustable mounting plate;
- The has to be installed before closing the wall;
- Fluxometer not Included.

INCLUDES


- Toilet fixing material;
- Frame fixing material;
- Inlet and outlet toilet connection;
- Outlet bend and Ø90/110 adaptor.



cod. 880462

EASY

Sanitarblock

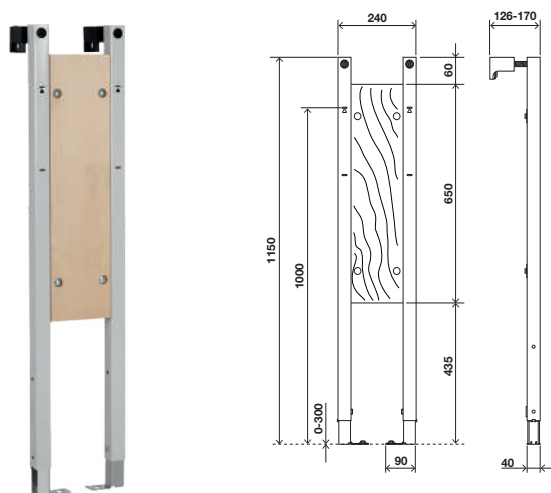

SPECIFIC FEATURES


- Frame for wall-hung urinal dividers;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Adjustable height from 0 to 200mm;
- Reinforced wood panel;
- One man assembly.

INCLUDES


- Frame fixing material.



cod. 032714

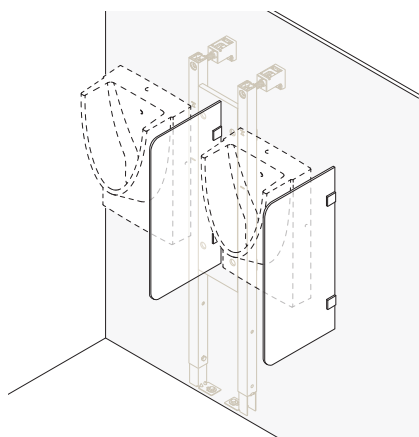

ECO WC/BIDET

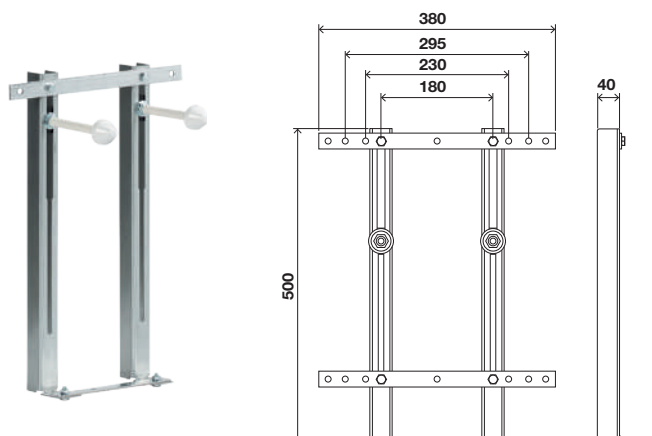

SPECIFIC FEATURES

- Frame for wall-hung toilet or bidet;
- Brick-wall installation;
- Galvanized frame;
- Adjustable in width.

INCLUDES


- Toilet/bidet fixing material;
- Frame fixing material.



cod. **883176**

BIDET

Simflex

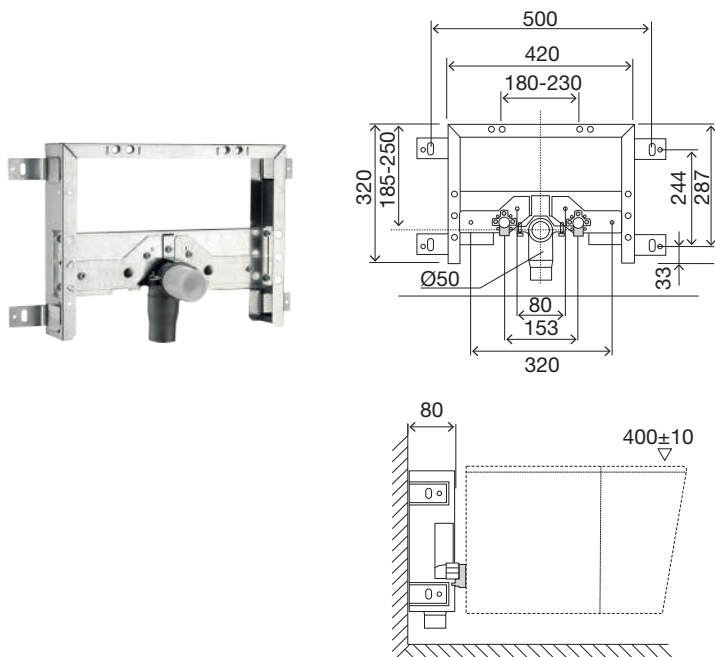

SPECIFIC FEATURES

- Frame for wall-hung toilet;
- Brick-wall installation;
- Galvanized frame;
- Adjustable attachment plate;
- 80mm thick.

INCLUDES


- Bidet fixing material;
- Frame fixing material;
- Outlet bend and Ø40/32-50.



cod. **610010**

BIDET

Sanitarblock

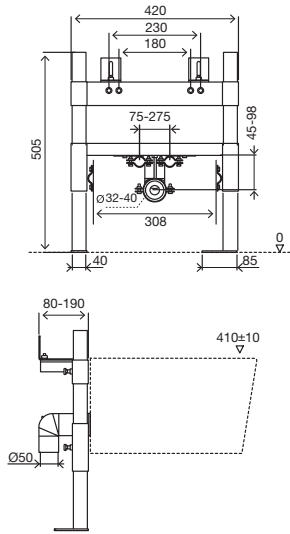

SPECIFIC FEATURES

- Frame for wall-hung bidet;
- Brick-wall or drywall installation;
- Frame tested for a 400kg load;
- Adjustable attachment plates;
- 80mm thick.

INCLUDES


- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø 40 32/50.



cod. **008908**

BIDET

Sanitarblock

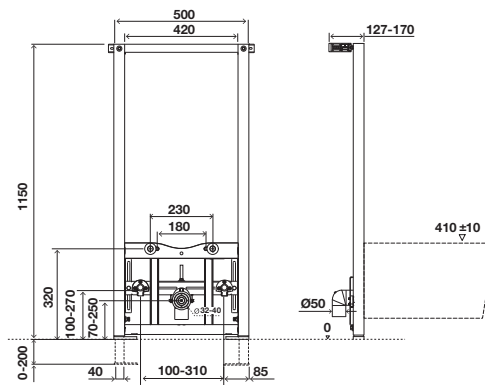

SPECIFIC FEATURES

- Frame for wall-hung bidet;
- Brick-wall or drywall installation;
- Easy and quick installation with Fast-Fit system;
- Frame tested for 400kg load;
- Height adjustable from 0 to 200mm;
- Adjustable mounting plates;
- 127mm thick.

INCLUDES


- Bidet fixing material;
- Frame fixing material;
- Outlet bend Ø40mm 32/50mm;
- Two G ½ fittings for water connection.



cod. **136078**

WASHBASIN

Simflex

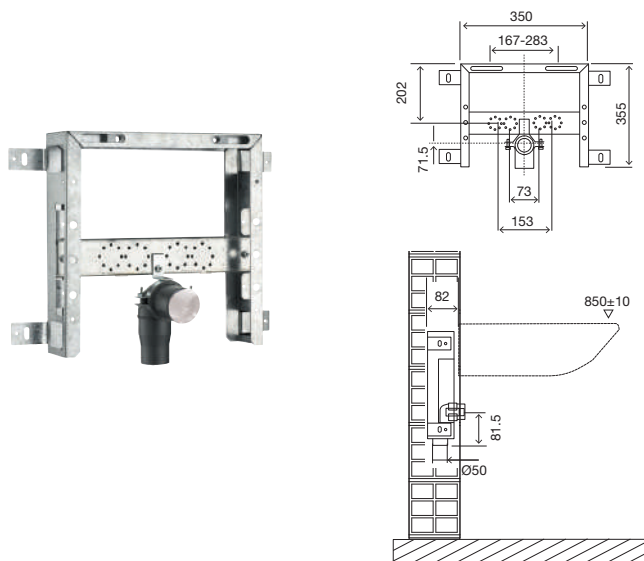

SPECIFIC FEATURES

- Frame for wall-hung washbasin;
- Brick-wall installation;
- Galvanized frame;
- Adjustable attachment plate;
- 80 mm thick.

INCLUDES


- Frame fixing material;
- Washbasin fixing material;
- Outlet bend \varnothing 40-32/50.



cod. 611011

WASHBASIN

Sanitarblock

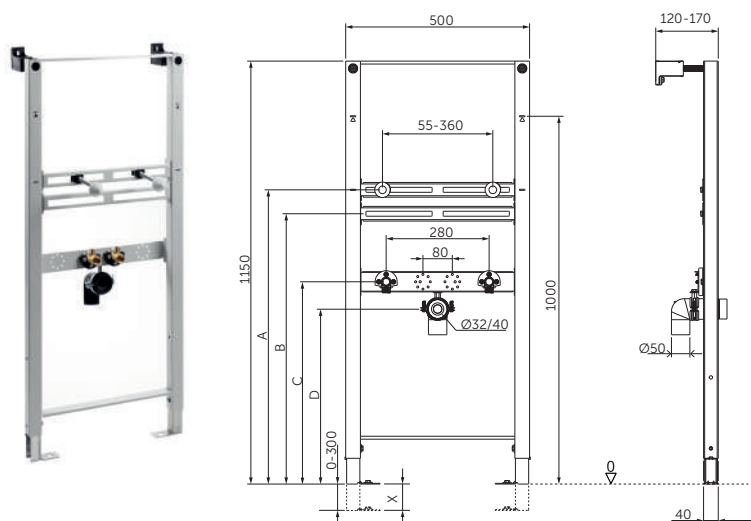

SPECIFIC FEATURES

- Frame for wall-hung washbasin;
- Brick wall or drywall installation;
- Easy and quick installation with Fast Fit system;
- Height adjustable from 0 to 300mm;
- Fully adjustable mounting plates;
- One man assembly;
- Frame tested for 150kg load;
- 120mm thick.

INCLUDES


- Washbasin fixing material;
- Frame fixing material;
- Outlet bend \varnothing 40mm 32 / 50mm;
- Two G 1/2 fittings for water connection.



cod. 881857

SHOWER FRAME

Sanitarblock

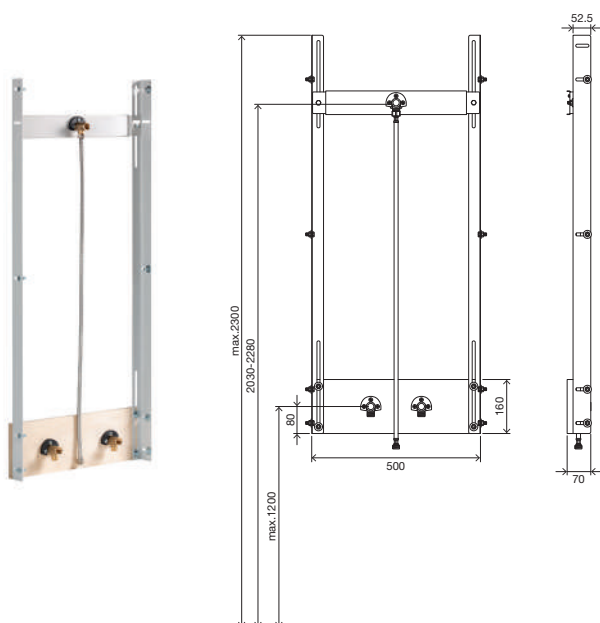

SPECIFIC FEATURES

- Frame for shower and taps;
- Brick-wall or drywall installation;
- 70mm thick;
- Height adjustable;
- Adjustable attachment plate.


INCLUDES

- 3 water connections F/M 1/2"x1/2" with seal and screws;
- Flexible tube F/Mx1/2";
- Frame fixing material.



cod. **880461**

CONCEALED SIPHON

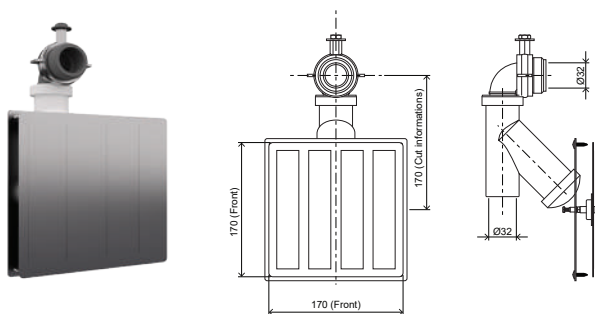

SPECIFIC FEATURES

- Hidden siphon for wall-hung washbasin;
- Hidden connections Ø32;
- Concealed siphon guarantees the maintenance access through suction cups;
- Possibility to customize the stainless steel cover with the wall covering.

INCLUDES

- Stainless steel plate 170x170mm;
- Outlet bend Ø 32/32;
- 2 suction cups;
- 4 glue strips.

cod. **883081**

FRAME ACCESSORIES



- Toilet outlet bend for wall-hung toilets;
- Length: 340mm;
- Exit $\varnothing 90$;
- Toilet connection $\varnothing 90$.

COD

622002

Wc outlet bend



- Toilet outlet bend for wall-hung toilets;
- Length: 300mm;
- Exit $\varnothing 110$;
- Toilet connection $\varnothing 90$.

COD

036888


wc outlet bend $\varnothing 90 \times 90$ 

- Outlet pipe $\varnothing 90 \times \varnothing 125 \times 250$;
- Rubber seal for outlet pipe $\varnothing 125$;
- Connection Toilet connection pipe $\varnothing 45 \times 180$;
- Toilet fixing material.

COD

622501

Toilet connection pipe



- Outlet pipe $\varnothing 90 \times \varnothing 125 \times 300$;
- Rubber seal for outlet pipe $\varnothing 125$;
- Connection Toilet connection pipe $\varnothing 45 \times 280$;
- Rubber seal for WC pipe $\varnothing 45$;
- M12x300 rods for wall-hung toilets fixation;
- Counter plate fixation screws;
- Fixing toilet accessories.

COD

011229

Longer Sleeves for Wall-hung toilets



- Accessory sets to enable the correction of incorrect applications;
- Toilet connection $\varnothing 90$;
- Connection WC pipe $\varnothing 45 \times 180$.

COD

885108

Eccentric set connection 25mm



- Polypropylene (PP) material;
- Adaptor to match with $\varnothing 90 / 110$.

COD

086360

Outlet bend adaptor $\varnothing 90 / 110$

FRAME ACCESSORIES



- Connector between the flush pipe and the outlet bend;
- The flushing can be tested before the toilet is installed.

COD

885233

Bypass conector



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the Sanitaryware and the tile.

COD

620071

Acoustic insulation for Wall-hung toilet and bidet



- Acoustic insulation in expanded polyethylene;
- Avoids direct contact between the washbasin and tile.

COD

620072

acoustic insulation washbasin



- Length: 300mm;
- Exit Ø110;
- Toilet connection Ø90.

COD

108380

Horizontal outlet wc



- Flexible connection;
- Length: Min 220mm/ Max 570mm;
- Exit Ø90/110;
- Toilet connection Ø80/100.

COD

079929

Flexible outlet wc



- 2 protections set for sanitaryblock frames.

COD

167288

Acoustic Insulation



- Compatible with all taps and urinal concealed flush valve;
- Adjustable mounting wood panel;
- Fixing material.

COD

881858

Wall tap/concealed flush valve



- Double outlet bend for wall-hung toilets with horizontal installation.

COD

622022








90/110

622023

110/110










PART NUMBER GUIDE FRAMES

	WC	BIDET	WASHBASIN	URINAL
WC Sanitarblock 	714001	-	-	-
WC Free-standing 	616042	-	-	-
WC frame 	880462	-	-	-
Urinal Sanitarblock 	-	-	-	136179
Ceramic Urinal divider 	-	-	-	RE30100889764 white RE30100889765 black
Urinal divider 	-	-	-	000079
Easy frame structure 	-	-	-	032714






WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
625x172x450	7.676	1	0	7.676	36	1.25	0.8	1.96	296.336
535x211x540	10.962	1	0	10.962	28	1.2	0.8	2.32	326.936
1180x140x530	12.462	1	0	12.462	20	1.2	0.8	2.35	269.24
1175x96x550	10.243	1	0	10.243	32	1.2	0.8	2.52	347.776
717x182x519	0	0	0	0	48	1.2	0.8	2.19	20
-	0.0	1	-	-	0	0.000	0.000	0.000	20
1200x65x260	1.255	1	0	1.255	48	1.2	0.8	1.37	80.24

PART NUMBER GUIDE FRAMES

	WC	BIDET	WASHBASIN	URINAL
Eco Wc/Bide 	883176	-	-	-
Bidet 	-	610010	-	-
Eco bidet 	-	008908	-	-
Bidet Sanitarblock 	-	136078	-	-
Washbasin Simflex 	-	-	611011	-
Washbasin Sanitarblock 	-	-	881857	-
Shower frame 	880461	-	-	-



									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
547x151x60	1.995	1	0	1.995	110	1.2	0.8	0.776	239.45
441x333x97	2.979	1	0	2.979	100	1.22	0.8	1.712	317.9
513x126x180	5.279	1	0	5.279	120	1.2	0.8	1.78	653.48
1175x96x550	10.538	1	0	10.538	24	1.2	0.8	1.81	272.912
-	0.0	1	-	0	0	0.000	0.000	0.000	20
1175x96x550	9.796	1	0	9.796	32	1.2	0.8	0	333.472
1200x65x260	4.37	1	0	4.37	48	1.2	0.8	1.37	229.76





VORONOI	121
LESS IS MORE	122
INO-X 02 / INO-X 06	123
KEY	124
OCEANIA	125
OCEANIA MIA	125
SLIM INOX	126
SLIM MATTE COLLECTION	127
SLIM	127
GLAM OLIPURE	128
GLAM	128
GLOBE	129
PLAIN	130
RIA START/STOP	130
METAL	130
RIA	131
TRUMPET	132
BLINK MATTE	133
BLINK	134
SM15	135
KARISMA	137
SALINA 2	137
OCEANIA	138
OCEANIA MIA	138
MINI TREND	139
MONO TREND	139
EASY DUAL	139
PNEUMATIC ACTUATOR FOOT OPERATED	141
PNEUMATIC ACTUATORFOOT OPERATED	141
SPHERA	142
PNEUMATIC ACTUATOR	142
PNEUMATIC ACTUATOR	142
ELECTRA III	143
KEY	145
HALLO	147
HALLO PRO	147
MOON	148
GLASSY	149
ELINE	150
BLINK URINAL	151
GLOBE URINAL	153
EAQUA URINAL	153



Mechanic actuation



AC power-mains



OLIpure



Single flush



Pneumatic actuation



Reduced mobility



Anti-theft



Dual flush



Electronic actuation



Hydroboost



Stop Fire



100% Hygienic







Capacitive sensor













COMPATIBILITY MATRIX

FLUSH PLATES / IN-WALL CISTERNS

With a wide range of flush plates, OLI offers innovative solutions in terms of technology and design that are versatile for any bathroom. For the correct installation and operation of the product, we have identified the minimum height required for each cistern model.

		Mechanical VERSION										
												
		LESS IS MORE	GLOBE	SLIM	OCEANIA	INO-X	GLAM	PLAIN	METAL	RIA	KEY	VORANOI
EXPERT PLUS	Top	-	* 0mm	0mm	-	-	* 0mm	* 0mm	0mm	0mm	5mm	
	Front	5mm	0mm	0mm	-	-	0mm	* 0mm	0mm	0mm	-	
OLI170 PLUS		10mm	0mm	15mm	-	-	10mm	0mm	10mm	10mm	15mm	
OLI174 PLUS		5mm	0mm	15mm	0mm	0mm	with OLIPURE 0mm without OLIPURE 0mm	0mm	0mm	5mm	5mm	
OLI120 PLUS		10mm	10mm	15mm	-	-	with OLIPURE 20mm without OLIPURE 25mm	10mm	15mm	10mm	15mm	
QUADRA PLUS		15mm	5mm	15mm	15mm	15mm	10mm	10mm	0mm	5mm	-	
OLI180		-	0mm	15mm	-	-	-	0mm	0mm	0mm	10mm	



	PNEUMATIC VERSION						ELECTRONIC VERSION					
												
	TRUMPET	OCEANIA	BLINK	SM15	KARISMA	SALINA 2	MOON	GLASSY	eLINE	ELECTRA III	KEY	HALLO
	15mm	15mm	15mm	-	35mm	35mm	-	15mm	15mm	-	-	-
	5mm	20mm	5mm	0mm	25mm	25mm	10mm	10mm	5mm	5mm	5mm	-
	5mm	45mm	5mm	25mm	25mm	25mm	10mm	10mm	5mm	15mm	10mm	0mm
	0mm	5mm	0mm	0mm	10mm	10mm	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	-	-	-
	0mm	35mm	0mm	5mm	10mm	10mm	-	-	-	-	-	-
	0mm	0mm	0mm	0mm	0mm	0mm	-	-	-	-	-	-

FLUSH PLATE

MECHANICAL VERSION

LESS IS MORE



883526 White 883524 Polished chrome 883525 Brushed 883527 Black 888573 Gold

KEY

NEW



889101 Polished chrome 890120 Black matte

VORONOI

NEW



890370 Burnt Terra 890364 Black Dark Carbon 890371 Organic Gold 890367 Arabic Stone 890368 Urban Concrete 890351 White Pure Glacier 890369 Forest Terra 890372 Raw Umber

OCEANIA



054564 Stainless steel - Brushed 054554 Glass White 054557 Glass Black 054558 Stainless steel button - glass White 054562 Stainless steel button - glass Black 054561 Stainless steel - Polished chrome 882412 Stainless steel Gold

OCEANIA MIA



054563 Mech (customizable)

SLIM



659041 White 659044 Polished chrome 659046 Matte chrome 659056 Black matte 659042 White matte 659058 Grey matte

METAL



656004 Polished chrome 656006 Matte chrome

SLIM INOX



057141 Inox 889313 Inox Gun Metal 889312 Copper 888565 Inox Gold Plated 888561 White Gold Plated

INO-X



660002 INO - X 02 Polished chrome 661006 INO - X 06 Brushed

GLOBE




152949 White 152950 Polished chrome 152951 Matte chrome 152952 Black soft-touch 152954 Gold plated 152953 Grey soft-touch
885464 White Antibacterial

GLAM OLPure



139178 White Antibacterial 139179 Polished chrome OLPure 139180 Matte chrome OLPure 139181 Black soft-touch OLPure

GLAM



139184 White Antibacterial 139185 Polished chrome 139186 Matte chrome 139187 Black soft-touch

PLAIN



070826 White 070827 Polished chrome 070828 Matte chrome 070829 Black soft-touch









RIA



010230 White 640584 Polished chrome 640586 Matte chrome 640591 White Antibacterial



PNEUMATIC VERSION

<p>TRUMPET</p>  <p>046199 Polished chrome 046198 Brushed 883245 Gold plated 878783 White Gold plated 887609 Copper</p>							
<p>BLINK</p>  <p>216622 White 154963 Polished chrome 093399 Brushed 882567 Gun Metal 878490 Black 883246 Gold plated 878781 White Gold plated 887610 Copper</p>							
<p>BLINK matte</p>  <p>889873 Brushed Gold matte 889872 Brushed white gold matte 889874 Brushed copper matte 889875 Brushed matte 889871 Brushed Gun Metal matte</p>					<p>SM15</p>  <p>022238 White tempered glass</p>		
<p>OCEANIA</p>  <p>054988 Stainless steel - Brushed 054989 Glass White 054992 Glass Black 054993 Stainless steel button - glass White 054996 Stainless steel button - glass Black 054998 Stainless steel - Polished chrome</p>						<p>OCEANIA MIA</p>  <p>054997 Pneu (customizable)</p>	
<p>KARISMA NEW</p>  <p>641001 White 641004 Polished chrome 641006 Matte chrome 641015 Black soft-touch</p>				<p>SALINA 2 NEW</p>  <p>890376 White 890416 Polished chrome 890417 Matte chrome 890375 Black matte</p>			

ELECTRONIC VERSION

<p>MOON</p>  <p>878848 White 878981 Black</p>		<p>GLASSY</p>  <p>878849 White 878850 Black 878702 Anthracite 878701 Taupe</p>				<p>HALLO NEW</p>  <p>889349 White 889350 Black</p>	
<p>eLINE</p>  <p>880876 Brushed 883585 Brushed Radio and Bluetooth</p>		<p>ELECTRA III</p>  <p>079206 Polished chrome zamac</p>		<p>KEY NEW</p>  <p>889102 Polished chrome Electronic/Mechanics 890121 Black matte Electronic/Mechanic</p>			


URINAL

<p>eAQUA urinal</p>  <p>879120 Inox AC 879119 Inox BATT</p>	<p>BLINK urinal</p>  <p>882264 Polished chrome</p>	<p>GLOBE urinal</p>  <p>878466 White 878818 Polished chrome 878819 Matt chrome 878822 Gold plated 885580 White Antibacterial</p>			
---	--	--	--	--	--






Burnt Terra




Black Dark Carbon




Organic Gold



Arabic Stone




Urban Concrete




White Pure Glacier



Forest Terra



Raw Umber





GENERAL FEATURES

- Mechanical actuation;
- Commitment to sustainability;
- Made from Biobased ABS;
- Mechanical actuation;
- Actuation force <20 N;
- Multiple finishes.

OLI's Voronoi flush plate is a celebration of design inspired by polygonal shapes, bringing the fluid, organic geometry of the Voronoi pattern into the bathroom. Its two-dimensional and faceted form, gives it a unique design and a sculptural presence that transcends functionality, making it a standout element in contemporary architectural projects.

More than a functional object, Voronoi reflects a commitment to sustainability. Made from biobased ABS, it uses recycled raw materials from biological sources, significantly reducing its environmental impact. This material, besides its sustainable feature, offers a smooth, high-quality finish that makes it easy to clean and preserves visual sophistication. Its exhaustive and detailed development process enables this piece to use 20 per cent less raw material and guarantees the same resistance, making it a statement of innovation and sustainability.

- cod. **890351** White Pure Glacier
- cod. **890364** Black Dark Carbon
- cod. **890367** Arabic Stone
- cod. **890368** Urban Concrete
- cod. **890369** Forest Terra
- cod. **890370** Burnt Terra
- cod. **890371** Organic Gold
- cod. **890372** Raw Umber

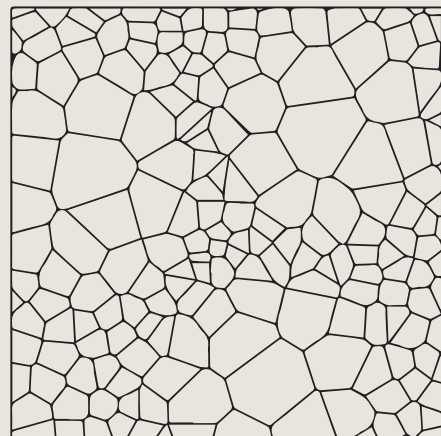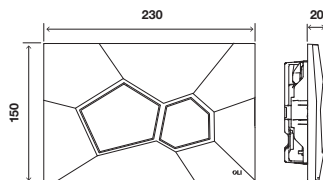




LESS IS MORE

Mechanical flush plate



reddot winner 2021

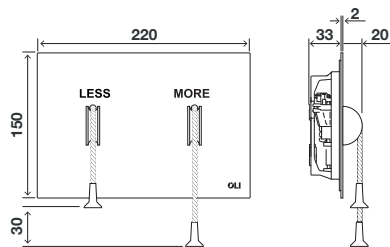

GENERAL FEATURES

- Design by Architect Alessio Pinto;
- Mechanical actuation;
- Stainless steel material;
- Nylon cords on grey;
- Mechanical actuation;
- Front application;
- Low actuation force <17 N;
- 2mm thick.



- cod. **883527** Black
- cod. **883525** Brushed
- cod. **883524** Polished chrome
- cod. **883526** White
- cod. **888573** Gold



ALESSIO PINTO

Alessio Pinto architect designed this amazing flush plate. Born in Rome on the 12th of July 1968, Alessio Pinto architect states:

"At a glance we realise the meaning of Plus and Minus. All it takes is viewing the cords as analogue signs"

Alessio Pinto




INO-X 02 / INO-X 06


Mechanical flush plate



INO-X 02

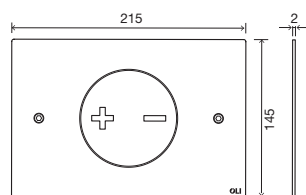

INO-X 06

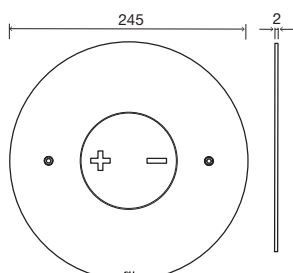


GENERAL FEATURES

- Designed by Architect Romano Adolini;
- Stainless steel material;
- Mechanical actuation;
- Actuation force < 20 N;
- Tiltable button;
- Anti-theft;
- 2mm thick.



cod. **660002** Polished chrome

cod. **661006** Brushed



ROMANO ADOLINI


The Ino-x flush plate collection was designed by Romano Adolini, an Italian architect and designer who is an influential figure in bathroom design.

"A simple sheet of steel that is only 2mm thick cut with a precise laser".

Romano Adolini



KEY 
Mechanical flush plate

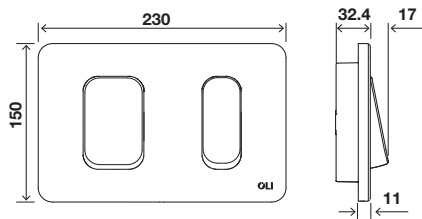

- cod. **889101** Mechanic Stainless steel brushed
- cod. **890120** Mechanic black matte

GENERAL FEATURES



- Dual flush;
- Mechanical actuation;
- Material: Brushed stainless steel;
- Finish: Brushed and PVD black matte;
- High resistance to impact and scratches;
- 11mm thick (front);
- Safe and inclusive actuation;
- Safe and inclusive system;
- Suitable for public spaces*.





OCEANIA

Mechanical flush plate

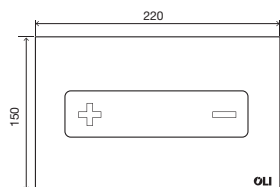

GENERAL FEATURES

- Stainless steel or tempered glass material;
- Mechanical actuation;
- Actuation force < 20 N;
- Tiltable button;
- Anti-theft;
- Different combinations of materials and finishes;
- 4mm thick (steel);
- 6mm thick (glass).



Note: Only compatible with OLI74 PLUS and QUADRA PLUS.

- cod. **054557** Glass black
- cod. **054554** Glass white
- cod. **054564** Stainless steel brushed
- cod. **054561** Stainless steel polished chrome
- cod. **054562** Stainless steel button glass Black
- cod. **054558** Stainless steel button glass White
- cod. **882412** Stainless steel gold



OCEANIA MIA

Mechanical flush plate

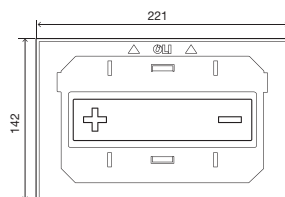

GENERAL FEATURES

- Customizable flush plate;
- 10mm material thick for the finishing;
- Stainless steel frame;
- Different finishing possibilities;
- Mechanic actuation;
- Actuation force < 20 N;
- Tiltable button;
- Anti-theft;
- 12mm thick.


- cod. **054563** mech (customizable)





SLIM INOX

Mechanical flush plate

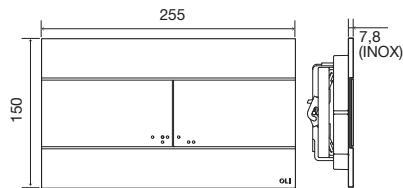

GENERAL FEATURES

- Dual flush;
- Mechanical actuation;
- Material: ABS coated with brushed stainless steel;
- Available in PVD finishes;
- High resistance to impact and scratches;
- Actuation force: < 20 N;
- 7.8mm thick;
- Suitable for public spaces*.

- cod. **888565** Gold plated
- cod. **888561** White gold plated
- cod. **889312** Copper
- cod. **889313** Gun metal
- cod. **057141** Inox



ANTI-THEFT LOCKER*



- cod. **883640** Anti-theft locker



- Compatible with the SLIM INOX flush plate;
- It makes the flush plate more resistant to theft;
- Ideal for application in public spaces.



SLIM MATTE COLLECTION

Mechanical flush plate



- cod. **659056** Black matte
- cod. **659058** Grey matte
- cod. **659042** White matte


GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick.



SLIM

Mechanical flush plate

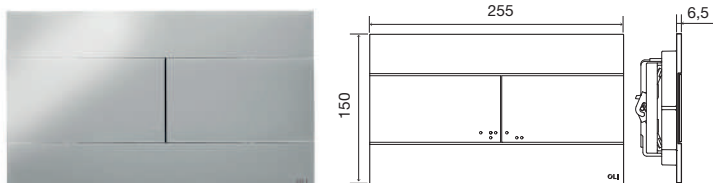

- cod. **659046** Matte chrome
- cod. **659044** Polished chrome
- cod. **659041** White

GENERAL FEATURES


- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick.






GLAM OLIpure

Mechanical flush plate

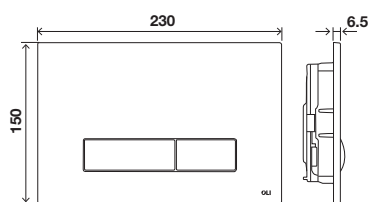

- cod. **139181** Black soft-touch OLIpure
- cod. **139180** Matte chrome OLIpure
- cod. **139179** Polished chrome OLIpure
- cod. **139178** White OLIpure Antibacterial

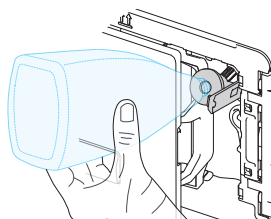

GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- OLIpure* compatible version;
- Actuation force < 20 N;
- 6.5mm thick;
- Antibacterial finish available.
- Opening and closing of the front plate by a click system on the side.

* AmbiWave liquid is sold separately.




OLIPURE IS A CLOSED STORAGE SYSTEM THAT WITH EACH FLUSH RELEASES A CONTROLLED AMOUNT OF CLEANER INTO THE TOILET.

This reduces the risk of the disinfectant damaging components in the cistern.

GLAM

Mechanical flush plate

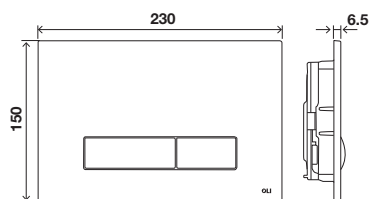

- cod. **139187** Black soft-touch
- cod. **139186** Matte chrome
- cod. **139185** Polished chrome
- cod. **139184** White
- cod. **885578** White Antibacterial

GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- OLIpure* compatible version;
- Actuation force < 20 N;
- 6.5mm thick;
- Antibacterial finish available;
- Opening and closing of the front plate by a click system on the side.

* AmbiWave liquid is sold separately.






GLOBE

Mechanical flush plate



GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Antibacterial finish available.

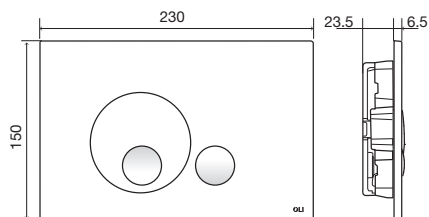


cod.	152952	Black soft-touch
cod.	152954	Gold plated
cod.	152953	Grey soft-touch
cod.	152951	Matte chrome
cod.	152950	Polished chrome
cod.	152949	White
cod.	885464	White antibacterial

COMBINATION



PLAIN

Mechanical flush plate

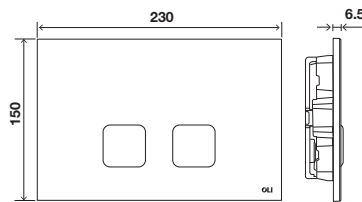

- cod. **070829** Black soft-touch
- cod. **070828** Matte chrome
- cod. **070827** Polished chrome
- cod. **070826** White


GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- Actuation force < 20 N;
- 6.5mm thick;
- Opening and closing of the front plate by a click system on the side.



RIA START/STOP

Mechanical flush plate

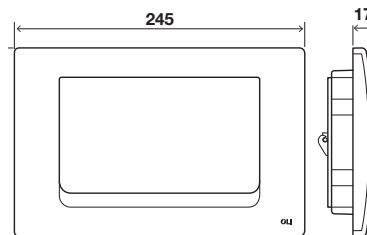


- cod. **010234** White

GENERAL FEATURES

- ABS: high resistance to scratches;
- Mechanical actuation;
- Single flush;
- Actuation force < 20 N;
- 17mm thick.

METAL

Mechanical flush plate

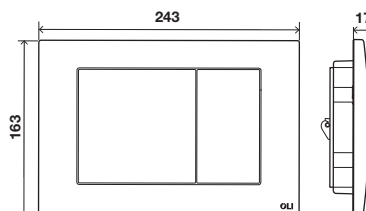

- cod. **656006** Matte chrome
- cod. **656004** Polished chrome

GENERAL FEATURES


- Zamac material;
- Mechanical actuation;
- Actuation force < 20 N;
- Anti-theft;
- 17mm thick.





RIA

Mechanical flush plate

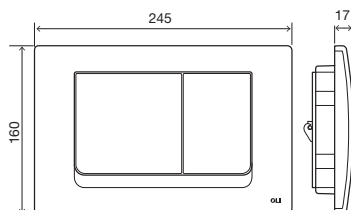

GENERAL FEATURES

- ABS: high resistance to scratches;
- Antibacterial finish available;
- Mechanical actuation;
- Dual flush;
- Actuation force < 20 N;
- 17mm thick.



- cod. **640586** Matte chrome
 cod. **640584** Polished chrome
 cod. **640591** White Antibacterial
 cod. **010230** White

BATHROOMS WITH ANTIBACTERIAL SURFACES

There are various bacteria that can be found when a toilet is flushed. These microscopic particles carry bacteria such as E coli, Salmonella and Staphylococcus aureus. All of these can cause symptoms such as diarrhoea and stomach pains.

OLI has developed a version of flush plates that responds to the concern of protecting any bathroom against the proliferation of bacteria.



"ABS raw material + treatment with antimicrobial activity (> 99.99%)", according to the German laboratory QualityLabs BT.


HIGH PERFORMANCE

The tests, conducted and supervised in accordance with the ISO 22196 standard, were carried out by the German laboratory QualityLabs BT.



TRUMPET

Pneumatic flush plate


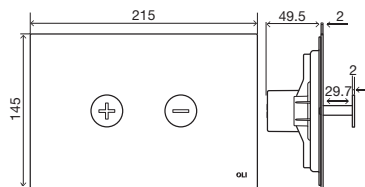


GENERAL FEATURES

- Designed by Architect Siza Vieira;
- Stainless steel material;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick.



- cod. **883245** Gold plated
- cod. **878783** White gold plated
- cod. **887609** Copper
- cod. **046198** Brushed
- cod. **046199** Polished chrome



ÁLVARO SIZA


"I am very pleased with the prestigious "Best of Category 2016" award for the Trumpet flush plate. The quality achieved is due to the competent and committed contribution of the technicians at OLI.

It was a pleasure to evolve the design of the flush plate with them. "



BLINK

Pneumatic flush plate

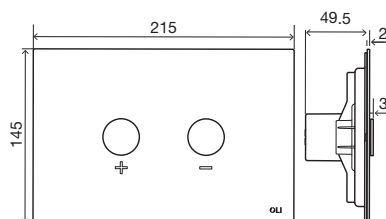

GENERAL FEATURES

- Dual flush;
- Pneumatic actuation;
- Material: Stainless steel;
- Finish: Brushed and PVD with varnish;
- Anti-fingerprint (front);
- Buttons with radial effect;
- Actuation force: < 20 N;
- 2mm thick.



- cod. **889875** Brushed matte
 cod. **889873** Brushed gold matte
 cod. **889872** Brushed white gold matte
 cod. **889874** Brushed copper matte
 cod. **889871** Brushed gun metal matte





THE PERFECT COMBINATION OF
 MATTE AND GLOSS, WITHOUT
 LEAVING MARKS



BLINK

Pneumatic flush plate

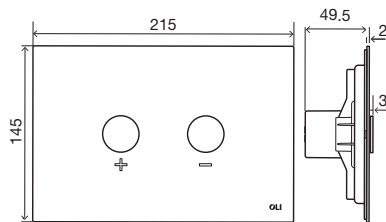


GENERAL FEATURES

- Stainless steel material;
- Pneumatic actuation;
- Actuation force <20N;
- 2mm thick.



- cod. **883246** Gold plated
- cod. **878490** Black
- cod. **887610** Copper
- cod. **093399** Brushed
- cod. **154963** Polished chrome
- cod. **216622** White
- cod. **878781** White Gold plated
- cod. **882567** Gun Metal

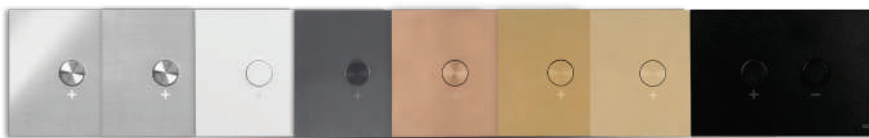


COMBINATION





SM15

Pneumatic flush plate

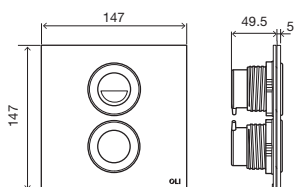

GENERAL FEATURES

- Designed by Architect Souto de Moura;
- White tempered glass material;
- Installation in the surface wall with 150x150mm tiles;
- Pneumatic actuation;
- Actuation force <math><20\text{N}</math>;
- 5mm thick.



cod. **022238** White tempered glass

COMBINATION





SOUTO DE MOURA

Souto de Moura is a renowned Portuguese architect who has been presented with various international awards, such as, the Gold Medal of Heinrich Tessenow Foundation in 2001; the Pritzker Award in 2011; the Wolf Prize of Arts in 2013; just to name a few.



NEW DESIGN ABS FLUSH PLATES

KARISMA
Pneumatic flush plate

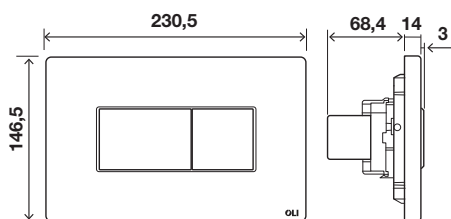

- cod. **641006** Matte chrome
- cod. **641004** Polished chrome
- cod. **641001** White
- cod. **641015** Black soft-touch


GENERAL FEATURES

- Dual flush;
- Pneumatic actuation;
- Material: ABS (high resistance to scratches);
- Actuation force: < 20 N;
- 14mm thick.



SALINA 2

Pneumatic flush plate

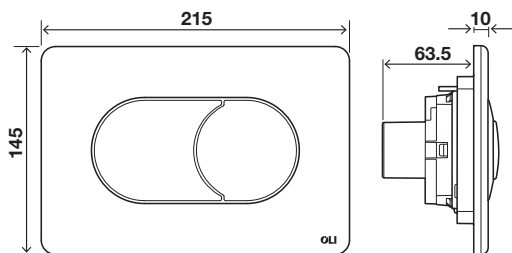

- cod. **890375** Black Matte
- cod. **890376** White chrome
- cod. **890417** Matte chrome
- cod. **890416** Polished chrome


GENERAL FEATURES

- ABS: high resistance to scratches;
- Pneumatic actuation;
- Actuation force < 20 N;
- 10mm thick.



OCEANIA

Pneumatic flush plate

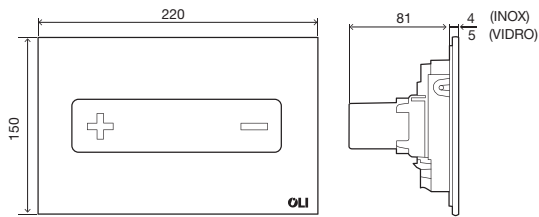

- cod. **054992** Glass Black
- cod. **054989** Glass White
- cod. **054988** Stainless steel Brushed
- cod. **054996** Stainless steel glass Black
- cod. **054993** Stainless steel glass White
- cod. **054998** Stainless steel Polished chrome

GENERAL FEATURES


- Stainless steel or tempered glass material;
- Pneumatic actuation;
- Actuation force < 20 N;
- Tilttable button;
- "Gull wing" opening system;
- Anti-theft;
- Different finishing possibilities and combinations:
- 4mm thick (steel);
- 6mm thick (glass).

Note: Compatible with all in-wall cisterns except OLI80.



OCEANIA MIA

Pneumatic flush plate

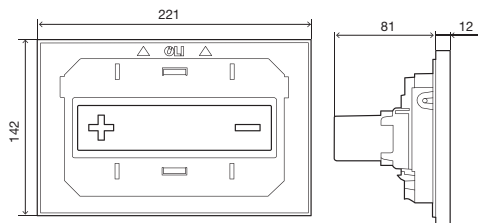

- cod. **054997** Pneumatic

GENERAL FEATURES

- Customizable flush plate;
- 10mm material thick for the finishing;
- Stainless steel frame;
- Finished in any material as long as it is 10mm thick;
- Pneumatic actuation;
- Actuation force < 20 N;
- Tilttable button;
- Anti-theft;
- 12mm thick.


Note: compatible with all in-wall cisterns except OLI80.





MINI TREND*

Pneumatic flush plate

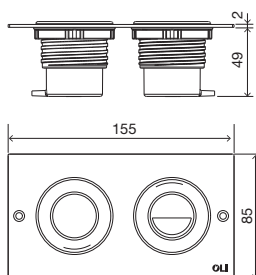

GENERAL FEATURES


- Polished chrome stainless steel material;
- Pneumatic actuation;
- For drywall installations;
- Anti-theft;
- Pneumatic connectors supplied;
- An inspection plate should be applied to ensure the access to the cistern*;
- 2mm thick.



cod. **605294** Polished chrome

MONO TREND*

Pneumatic flush plate

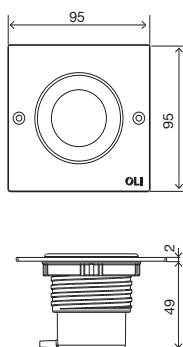

GENERAL FEATURES


- Polished chrome stainless steel material;
- Single flush;
- Pneumatic actuation;
- For drywall installations;
- Anti-theft;
- An inspection plate should be applied to ensure the access to the cistern*;
- 2mm thick.



cod. **605254** Polished chrome

EASY DUAL

Pneumatic flush plate

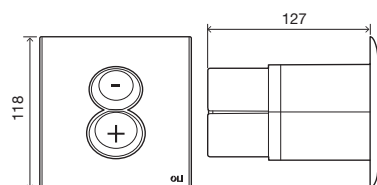

GENERAL FEATURES

- ABS: high resistance to scratches;
- Pneumatic actuation;
- Anti-theft;
- Adjustable buttons: 0mm, 18mm or 32mm;
- Compliant with safety regulations against fire (ERP) Article CO 31.




cod. **011640** White

* Not meant to be used in the opening of the in-wall cistern. An inspection plate (see page 155) should be applied to ensure access to the cistern. Pre-installation necessary.



PNEUMATIC ACTUATOR FOOT OPERATED *



Pneumatic flush plate

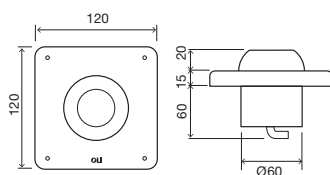

cod. **605201** Brushed

GENERAL FEATURES

- Stainless steel material;
- Floor installation;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- Anti-sliding push button;
- Anti-theft;
- 35mm thick.

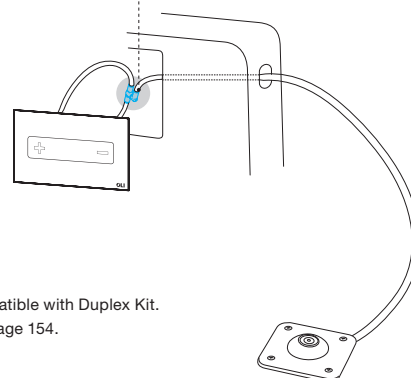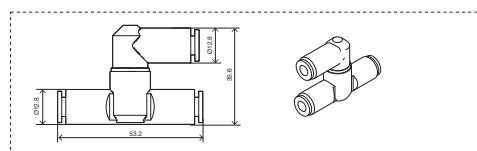


Compatible with Duplex Kit.
See page 154.



PNEUMATIC ACTUATOR FOOT OPERATED *

Pneumatic flush plate

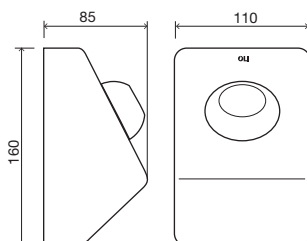

cod. **605301** Brushed


GENERAL FEATURES

- Stainless steel material;
- Wall installation;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- Anti-sliding push button;
- Anti-theft;
- 85mm thick.



SPHERA*


Pneumatic flush plate

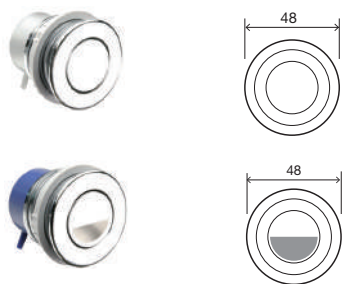

cod. **605274** SPHERA -
cod. **605264** SPHERA +


GENERAL FEATURES

- Polished chrome ABS material;
- Single flush;
- Pneumatic actuation;
- For drywall installations;
- An inspection plate should be applied to ensure the access to the cistern*;
- 20mm thick.

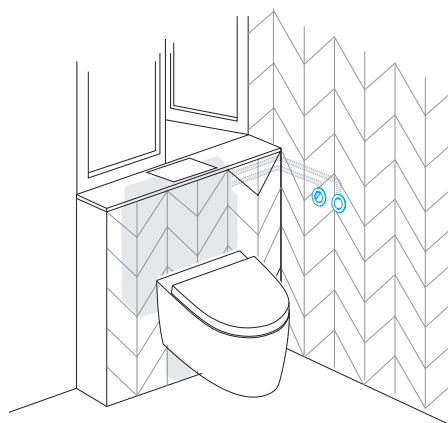

PNEUMATIC ACTUATOR*

In-wall salient pneumatic button

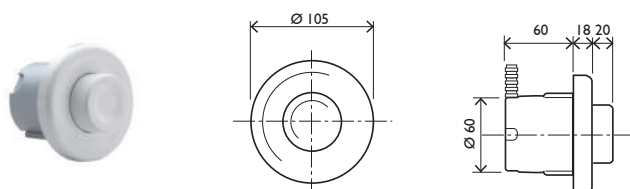

cod. **718063** White


GENERAL FEATURES

- White ABS material;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- 38mm thick.



PNEUMATIC ACTUATOR*

In-wall pneumatic push button

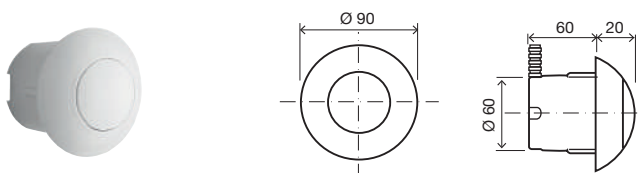

cod. **605001** White
cod. **605004** Polished chrome

GENERAL FEATURES


- White ABS material;
- Single flush;
- Pneumatic actuation;
- An inspection plate should be applied to ensure the access to the cistern;
- 20mm thick.





ELECTRA III

Electronic/mechanical flush plate

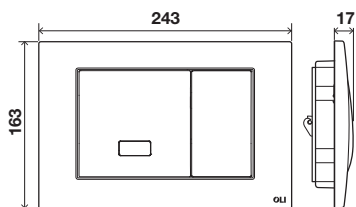

cod. **079206** Polished chrome zamac

GENERAL FEATURES

- Polished chrome Zamac material;
- Dual flush (<60s half flush; >60s full flush);
- Infrared sensor or mechanical actuation;
- Compatible with electronic in-wall cisterns;
- Electric power connection (adaptor 230V/12V not Included);
- Anti-theft;
- 17mm thick.



Note: Compatible with mechanical cistern + electronic conversion kit.



Public spaces



KEY NEW
 Mechanical / Electronic flush plate

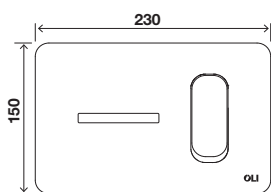

	Recetor Bluetooth
REMOTE CONTROL*	•

* Accessories not included. See page 154.

GENERAL FEATURES

- Automatic dual flush;
- Possibility of changing to Single flush;
- Electronic actuation: infrared sensor;
- Sensor detection distance up to 900mm;
- Material: Brushed stainless steel;
- Finish: Brushed and PVD black matte;
- Power supply: AC;
- Anti-fingerprint (front);
- Configurable hygienic flushing via APP in Bluetooth version (OFF 24h from factory);
- Configurable pre-flush (factory OFF);
- Anti-theft;
- "Gull-Wing" opening system;
- 11mm thick (front);
- Suitable for public spaces*.

The Bluetooth version allows you to calibrate the motor, monitor flushes and change the main settings.

Note: Compatible with AC version cisterns or mechanical cisterns + AC conversion kit.

- cod. **889102** Electronic/Mechanic Stainless steel brushed
- cod. **890121** Electronic/Mechanic black Matte




DOWNLOAD THE OLI IR APP





HALLO

Electronic flush plate

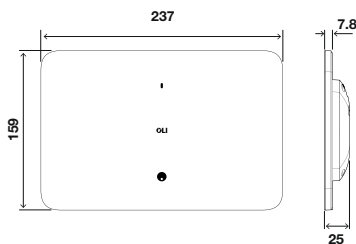


- cod. **889349** White
 cod. **889350** Black
 cod. **889351** Power supply HALLO

GENERAL FEATURES

- Dual flush;
- Material: Corner gorilla glass;
- Precise user detection via 2 'TOF (time of flight) sensors;
- No-touch flushing control;
- Mobile app, personalisation and statistics;
- Bluetooth communication;
- 7.2mm thick;
- Power supply not included;
- AC connection source.

Note: compatible only with OLI120 plus.

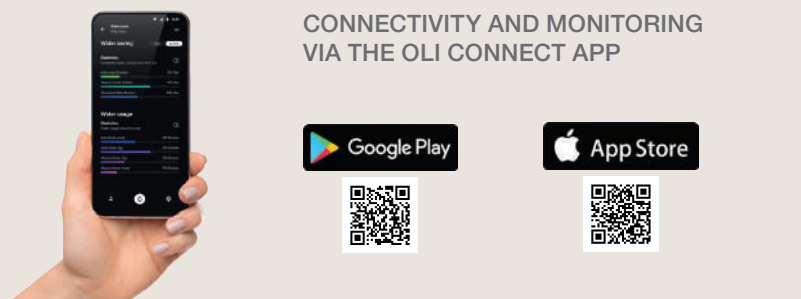**CONNECTIVITY AND MONITORING VIA THE OLI CONNECT APP**

With direct access to utilisation and performance data, users can control their flushes simply and efficiently. It guarantees maximum performance and minimises water consumption.

Control via the OLI CONNECT app enables greater efficiency and facilitates daily management.

HALLO PRO



- cod. **890096** Lake white with sensor
 cod. **890097** Lake black with sensor

**PERFECT
 COMBINATION OF
 ELECTRONIC FLUSH
 PLATE AND TOILET**

**GENERAL FEATURES**

- Ambient lighting under the toilet;
- Usage detection, sensorised toilet;
- Eliminates false flushes;
- Water savings of up to +50%;
- Stopping blockages;
- Flood prevention;
- Mobile app, personalisation and statistics.

Note: compatible only with OLI120 plus.


INCLUDES

- LAKE toilet with sensor;
- Seat & cover;
- Power supply included.





MOON
No-touch flush plate

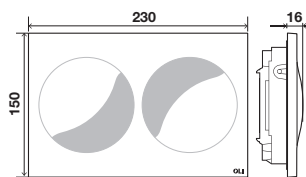

GENERAL FEATURES

- One-piece in white or black ceramic material;
- No-touch actuation through capacitive sensors;
- Hygienic and easy to clean;
- Compatible with Hydroboost or AC system;
- Anti-error electronic connections;
- Waterproof connectors;
- 16mm thick.

*Note: It is necessary to purchase a cistern with Hydroboost actuation (mechanical cistern + Hydroboost conversion kit).




cod. **878981** Black
cod. **878848** White



GLASSY

Electronic flush plate

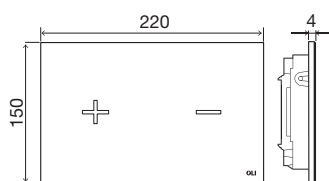


GENERAL FEATURES

- One-piece tempered glass;
- No-Touch actuation through capacitive sensors with led signs, multiple colours available;
- Hygienic and easy to clean;
- Compatible with Hydroboost or AC system;
- Anti-error electronic connections;
- Waterproof connectors;
- 4mm thick.


*Note: It is necessary to purchase a cistern with Hydroboost actuation (mechanical cistern + Hydroboost conversion kit).

- cod. **878702** Anthracite
 cod. **878850** Black
 cod. **878701** Taupe
 cod. **878849** White

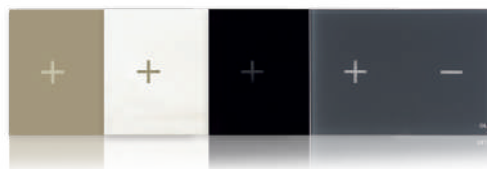



eLINE
Electronic flush plate

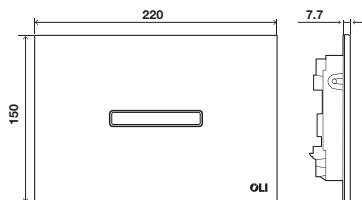

SAME DESIGN, TWO VERSIONS



	Bluetooth receiver	Radio receiver	Radio remote control
ELINE STANDARD*	•		
ELINE RÁDIO*	•	•	•

* Accesories not Included. See page 154.

- cod. **880876** Brushed
- cod. **883585** Brushed Radio and Bluetooth


GENERAL FEATURES

- Brushed stainless steel material;
- Automatic dual flush;
- Electronic actuation: infrared sensor;
- Compatible with ac in-wall cisterns;
- Electric power connection (adaptor 240V/7V not Included);
- Configurable hygienic discharge;
- Configurable pre-discharge;
- Infrared sensor with detection up to 900mm;
- Bluetooth version allows a statistical record of discharges;
- Radio version allows a remote actuation;
- Anti-theft;
- 8mm thick.
- The Bluetooth version allows you to calibrate the motor, monitor flushes and change the main settings;
- Radio version allows remote operation, via a remote control.

Note: Compatible with AC version cisterns or mechanical cisterns + AC conversion kit.



COMBINATION




DOWNLOAD THE OLI IR APP




BLINK Urinal

Mechanical flush plate

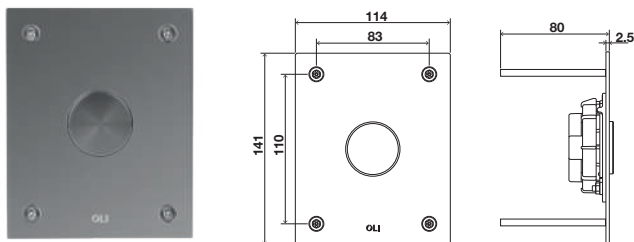

GENERAL FEATURES

- Stainless steel flush plate;
- Single flush;
- Mechanically actuated urinal plate for flush valve;
- Anti-theft;
- TORX security screws (+bit);
- The flush valve has to be installed before closing the wall;
- Compatible with URINAL Sanitarblock and OLI120 Double Frame wc/urinal/washbasin;
- 2.5mm thick.

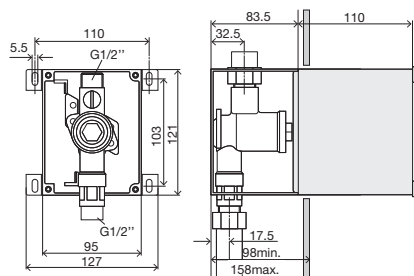


The concealed pre-installation box must be installed before the finished wall phase.

CONCEALED PRE-INSTALLATION SOLD SEPARATELY

- Adjustable flow;
- Flow pressure: 0.8 – 5 bar;
- Flow rate: 0.3 l/s;
- G 1/2" water connection;
- Protection cover 110mm;
- Pre-assembled water path with isolating valve;
- Sealing plug.

- cod. **882264** Polished chrome
- cod. **883087** Concealed pre installation

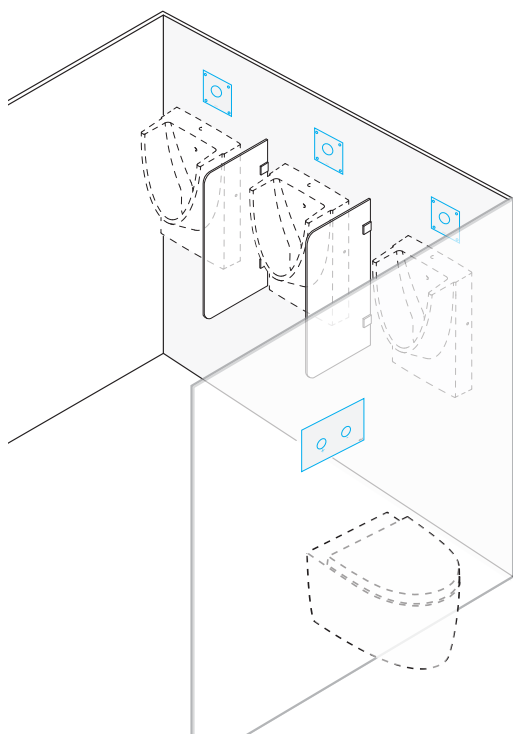



COMBINATION





GLOBE Urinal

Mechanical flush plate

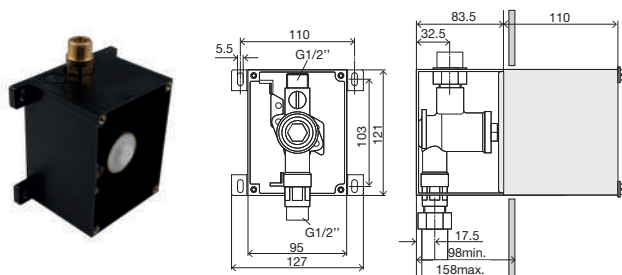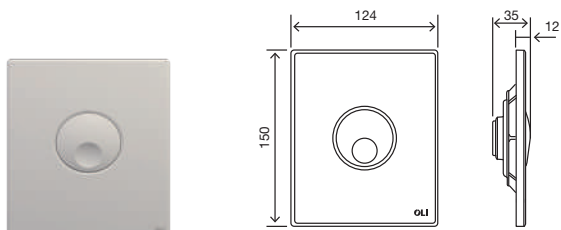

The concealed pre-installation box must be installed before the finished wall phase.

- cod. **878822** Gold plated
- cod. **878819** Matte chrome
- cod. **878818** Polished chrome
- cod. **878466** White
- cod. **885580** White Antibacterial
- cod. **883087** Concealed pre installation

GENERAL FEATURES

- ABS: high resistance to scratches;
- Single flush;
- Mechanically actuated urinal plate for flush valve;
- Anti-theft;
- The flush valve has to be installed before closing the wall;
- Compatible with URINAL Sanitarblock and OLI120 Double Frame wc/urinal/washbasin;
- 12mm thick.

CONCEALED PRE-INSTALLATION SOLD SEPARATELY

- Adjustable flow;
- Flow pressure: 0.8 – 5 bar;
- Flow rate: 0.3 l/s;
- G 1/2" water connection;
- Protection cover 110mm;
- Pre-assembled water path with isolating valve;
- Sealing plug.





COMBINATION



eAQUA Urinal

Electronic flush plate

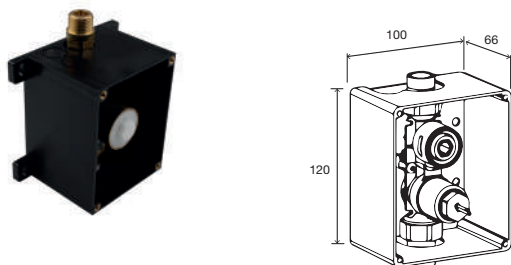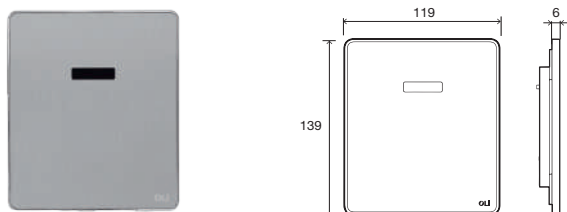

The concealed pre-installation box must be installed before the finished wall phase.

- cod. **879120** eAQUA URINAL Inox AC
- cod. **879119** eAQUA URINAL Inox BATT
- cod. **879123** Urinal concealed pre installation

GENERAL FEATURES

- Brushed stainless-steel;
- Dual flush infrared sensors (with automatic setting feature);
- Cleaning system (factory off);
- Touch-activated short discharge;
- Flush time and sensor sensitivity adjustable with touch;
- 24h/48h hygienic flush and pre-flush activation with touch;
- Compatible with URINAL Sanitarblock and Double Frame wc/urinal/washbasin;
- Anti-theft;
- 6mm thick.

CONCEALED PRE-INSTALLATION SOLD SEPARATELY

- Operating pressure: 0.3-10 bar;
- Flow rate: ca. 20 l/min. (3 bar);
- 6V Lithium CRP 2 (standard: life time up to 4 years) / mains power supply 230V/6V;
- Standards: DIN EN 200;
- CE marking.



COMBINATION



ACCESSORIES FLUSH PLATES



- Protection pipe 1.8m for pneumatic connections.

COD

049544

Protection pipe



- Pneumatic pipes x2;
- 3m each.

COD

043234

Pneumatic pipes 3M



- 2 points of actuation on the same cistern;
- Only for pneumatic flush plates;
- Single flush;
- Compatible with pneumatic systems OLI74 PLUS, OLI120 PLUS, EXPERT PLUS or QUADRA PLUS).

COD

216252

Kit Duplex



- Radio remote control;
- Dual flush;
- Capacitive buttons;
- 2 AAA batteries included.

COD

884193

Remote control



- Radio receptor control;
- Flushing by remote control.

COD

883578

Radio receptor




- Statistical record of discharges;
- App interaction;
- Easy and useful service for facility managers.

COD

883582

eLINE bluetooth receptor



- Input: 100-240 V AC;
- Frequency: 50/60Hz;
- Output: 7 V DC 3A;
- For AC flush plate (MOON, GLASSY, eLINE and KEY).

COD

878674

Power supply eline




- Input: 100-240 V AC;
- Frequency: 50/60Hz;
- Output: 12 V DC 1,5A;
- For use with Electra III.

COD

079260

Power supply




- Input: 100-240V AC;
- Frequency: 50/60Hz;
- Output: 12 V DC;
- Installation for HALLO flush plate;
- Extensible cables up to 260cm.

COD

889351

Power supplyflush plate



- Inspection plate;
- Stainless steel material;
- Customize with your preferred finish;
- Compatible with pneumatic in-wall cisterns;
- Anti-theft;
- 0.5mm thick.

COD

880390

Inspection plate SEAMLESS Brushed



- Inspection plate;
- Stainless steel material;
- Compatible with pneumatic in-wall cisterns;
- Anti-theft;
- 2mm thick.

COD

207893

Inspection plate inox Brushed

207892

Inspection plate inox Chrome

PART NUMBER GUIDE

	White	Black	Anthracite	Gold	White Gold	Taupe	Polished chrome	Brushed	Copper	Gun Metal	Grey soft-touch	Black soft-touch
--	-------	-------	------------	------	------------	-------	-----------------	---------	--------	-----------	-----------------	------------------



Mechanic

KEY	-	890120 matte	-	-	-	-	-	889101	-	-	-	-
LESS is MORE	883526	883527	-	-	-	-	883524	883525	-	-	-	-
INO-X 02	-	-	-	-	-	-	660002	661002	-	-	-	-
INO-X 06	-	-	-	-	-	-	660006	661006	-	-	-	-
OCEANIA	054558 steel button 054554 glass	054562 steel button 054557 glass	-	-	-	-	054561	054564	-	-	-	-
OCEANIA MIA	054563	-	-	-	-	-	-	-	-	-	-	-
GLOBE	152949	-	-	152954	-	-	152950	152951	-	-	152953	152952
SLIM	659041	-	-	154962	-	-	659044	659046	-	-	010216	659055
GLAM	139184	-	-	-	-	-	139185	139186	-	-	-	139187
PLAIN	070826	-	-	-	-	-	070827	070828	-	-	-	070829
RIA	010230 640591 antibacterial	-	-	-	-	-	640584	640586	-	-	-	-
RIA STOP	010234	-	-	-	-	-	010244	-	-	-	-	-
METAL	-	-	-	-	-	-	011418	656006	-	-	-	-



Pneumatic

TRUMPET	-	-	-	-	878783	-	046199	046198	878784	-	-	-
OCEANIA	054993 steel button 054989 glass	054996 steel button 054992 glass	-	-	-	-	054998	054988	-	-	-	-
OCEANIA MIA	054997	-	-	-	-	-	-	-	-	-	-	-
BLINK	216622	878490	-	883246 889873 matte	878781 889872 matte	-	154963	093399 889875 matte	887610 889874 matte	882567 889871 matte	-	-
SM15	022238	-	-	-	-	-	-	-	-	-	-	-
KARISMA	641001	-	-	-	-	-	641004	641006	-	-	-	641015
SALINA 2	890376	890375	-	-	-	-	890416	890417	-	-	-	-
EASY DUAL	011640	-	-	-	-	-	-	-	-	-	-	-
MONO TREND	-	-	-	-	-	-	-	23506	-	-	-	-
SPHERA+	-	-	-	-	-	-	605264	-	-	-	-	-
SPHERA-	-	-	-	-	-	-	605274	-	-	-	-	-
PNEUMATIC HAND	605001	-	-	-	-	-	605004	-	-	-	-	-
PNEUMATIC SALIENT HAND	718063	-	-	-	-	-	-	-	-	-	-	-
ACTUATOR FOOT FLOOR	-	-	-	-	-	-	-	605201	-	-	-	-



WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight

255x179x120	0.715	16	595x391x500	12	320	1.2	0.8	2.645	230
252x178x109	0.978	16	595x391x500	15.648	320	1.2	0.8	2.66	332.96
-	0.0	1	-	-	0	1.200	0.800	0.000	20
-	0.0	1	-	-	0	1.200	0.800	0.000	20
252x178x109	0.844	16	595x391x500	13.504	320	1.2	0.8	2.66	290.08
266x190x55	0.323	34	595x391x500	10.982	680	1.2	0.8	2.66	239.64
266x190x55	0.4	34	595x391x500	14	680	1.200	0.800	2.660	284.2
266x190x55	0.386	34	595x391x500	13.124	680	1.2	0.8	2.66	282.48
266x190x55	0.341	34	595x391x500	11.594	680	1.2	0.8	2.66	251.88
266x190x55	0.328	34	595x391x500	11.152	680	1.2	0.8	2.66	243.04
266x190x55	0.415	34	595x391x500	14.11	680	1.2	0.8	2.66	302.2
270x190x52	0.43	22	540x330x392	9.46	550	1.2	0.87	2.12	256.5
266x190x55	1.055	14	595x391x250	14.77	560	1.2	0.8	2.66	610.8

252x178x109	0.577	16	595x391x500	9.232	320	1.2	0.8	2.66	204.64
252x178x109	0.886	16	595x391x500	14.176	320	1.2	0.8	2.66	303.52
252x178x109	0.765	16	595x391x500	12.24	320	1.2	0.8	2.66	264.8
240x162x90	0.764	28	595x391x500	21.392	560	1.2	0.8	2.66	447.84
461x161x71	1.024	8	485x351x345	8.192	192	1.2	1	1.54	216.608
260x180x97	0.449	20	595x391x500	8.98	400	1.2	0.8	2.66	199.6
260x180x97	0.449	20	595x391x500	8.98	400	1.2	0.8	2.66	199.6
230X200X120	0.99	10	595x391x500	9.9	200	1.2	1	1.9	218
260x180x97	0.457	20	595x391x500	9.14	400	1.2	0.8	2.66	202.8
260x180x97	0.377	20	595x391x500	7.54	320	1.2	0.8	1.66	140.64
260x180x97	0.376	20	595x391x500	7.52	320	1.2	0.8	1.66	140.32
260x180x97	0.406	20	595x391x500	8.12	400	1.2	1	2.16	182.4
0	0	0	0	0	0	0	0	0	20
0	0	0	0	0	0	0	0	0	20

PART NUMBER GUIDE

	White	Black	Anthracite	Gold	White Gold	Taupe	Polished chrome	Brushed	Copper	Gun Metal	Grey soft-touch	Black soft-touch
ACTUATOR FOOT WALL	-	-	-	-	-	-	-	605301	-	-	-	-
SEAMLESS	-	-	-	-	-	-	-	880390	-	-	-	-
INSPECTION PLATE	-	-	-	-	-	-	207892	207893	-	-	-	-



Electronic

KEY	-	-	-	-	-	-	-	889102	-	-	-	-
HALLO	889349	889350	-	-	-	-	-	-	-	-	-	-
MOON	878848	878981	-	-	-	-	-	-	-	-	-	-
GLASSY	878849	878850	878702	-	-	878701	-	-	-	-	-	-
eLINE	-	-	-	-	-	-	-	880876	-	-	-	-
								883585 Radio and bluetooth	-	-	-	-
ELECTRA III	-	-	-	-	-	-	079206	-	-	-	-	-



Urinal

BLINK URINAL	-	-	-	-	-	-	Blink 882264	-	-	-	-	-
							883087 Concealed pre-installation	-	-	-	-	-
EAQUA URINAL	-	-	-	-	-	-	-	879120 AC 879119 Batt	-	-	-	-
								879123 Concealed pre-installation	-	-	-	-
GLOBE URINAL	878466	-	-	878822	-	-	878818	878819	-	-	-	-
	883087 Concealed pre-installation	-	-	883087 Concealed pre-installation	-	-	883087 Concealed pre-installation	883087 Concealed pre-installation	-	-	-	-



OLIpure

GLAM	139178	-	-	-	-	-	139179	139186	-	-	-	139181
------	--------	---	---	---	---	---	--------	--------	---	---	---	--------



Anti-theft

SLIM INOX	-	-	-	-	-	-	-	057141	-	-	-	-
METAL	-	-	-	-	-	-	011418	656006	-	-	-	-

	White Pure Glacier	Black Dark Carbon	Arabic Stone	Urban Concrete	FForest Terra	FBurnt Terra	Organic Gold	Raw Umber
VORONOI	890351	890364	890367	890368	890369	890370	890371	890372



0	0	0	0	0	0	0	0	0	20
266x190x55	0.456	34	595x391x500	15.504	680	1.2	0.8	2.66	330.08
266x190x55	0.657	34	595x391x500	22.338	680	1.2	0.8	2.66	466.76

255x179x120	0.715	12	595x391x500	9	240	1.2	0.8	2.645	172
290x185x147	1.2	8	598x388x320	11.1	96	1.2	0.8	1.1	135
252x178x109	1.347	16	595x391x500	21.552	320	1.2	0.8	2.66	451.04
252x178x109	1.015	16	595x391x500	16.24	320	1.2	0.8	2.66	344.8
260x180x97	0.895	8	595x391x250	7.16	256	1.2	0.8	2.32	249.12
0	0	0	0	0	0	0	0	0	20

266x190x55	0.627	14	595x391x250	8.778	448	1.2	0.8	2.16	300.896
261x187x114	0.799	16	595x391x500	12.784	320	1.2	0.8	2.66	275.68
0	0	0	0	0	240	1.2	0.8	2.66	20
266x190x55	0.299	14	595x391x250	4.186	448	1.2	0.8	2.16	153.952

266x190x55	0.37	34	595x391x500	12.58	680	1.2	0.8	2.66	271.6
------------	------	----	-------------	-------	-----	-----	-----	------	-------

266x190x55	0.509	14	595x391x250	7.126	560	1.2	0.8	2.66	305.04
266x190x55	1.039	14	595x391x250	14.546	560	1.2	0.8	2.66	601.84

266x190x55	0.323	34	595x391x500	10.982	680	1.2	0.8	2.66	239.64



RANGE



ECO.OPALA

QUARZO

SMERALDO

TOPAZIO DD

ONIX PLUS



DUAL FLUSH



SINGLE FLUSH



START/STOP



MEDIUM-LOW POSITION



CLOSE COUPLED POSITION



HIGH POSITION



OLIPURE



PLUS SYSTEM



ANTI-CONDENSATION

ZAFFIRO




TURCHESE



TOPAZIO



OLISTYLE

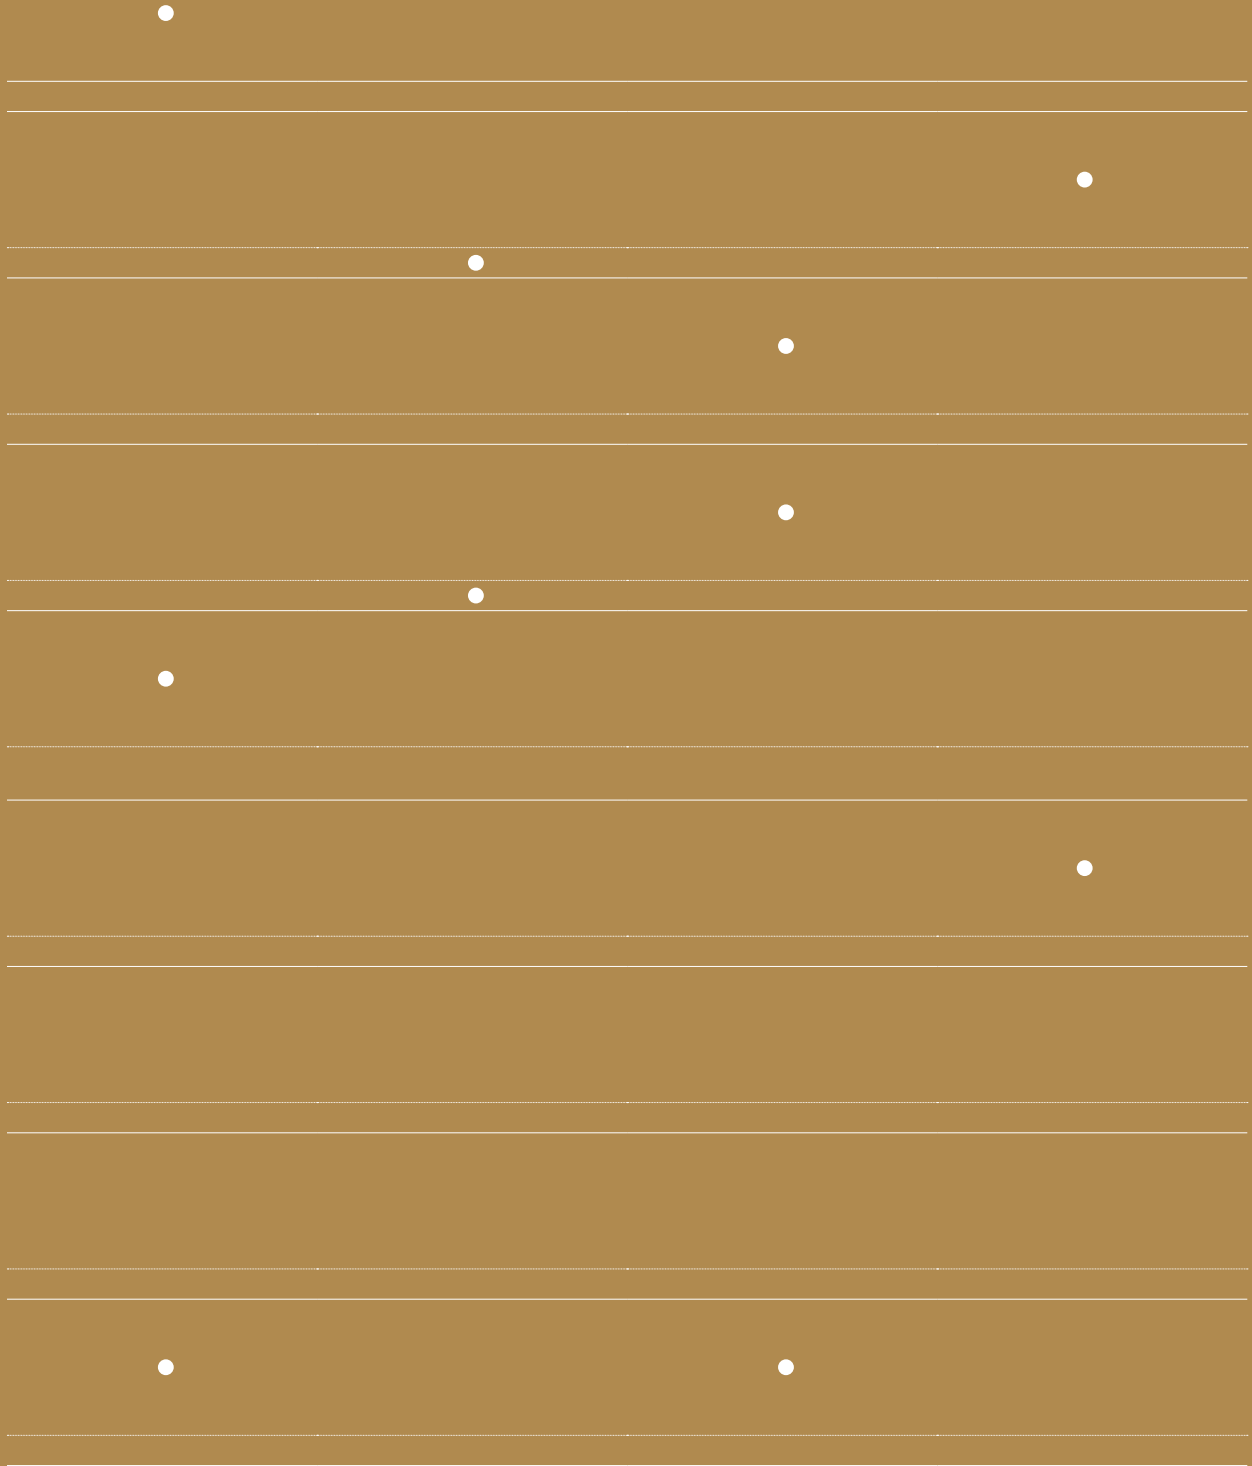

EXPOSED FLUSH CISTERNS






ECO.OPALA
Medium-low Position



The first OLI's exposed cistern with 99% recycled polystyrene raw material.

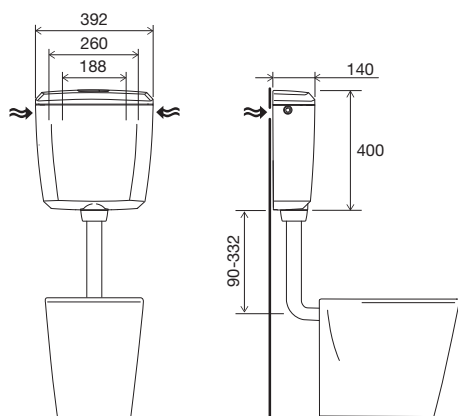

SPECIFIC FEATURES

- Dual flush 6/3 litres;
- 99% recycled polystyrene raw material;
- Colour: black;
- 140mm thick;
- Equipped with PLUS inlet valve (delayed and silent opening);
- Class 1 and NF certified;
- Anti-condensation and acoustic insulation;
- Adjustable wall fixing system (compatible with existing fixings);
- Mains water connection, 3/8" brass, from the left, right or back *;
- All the accessories required for installation are supplied.

* To connect the water in the back position, it is necessary to purchase a flexible or elbow connection.

INCLUDES

- Flush pipe Ø50/40;
- Wall fixing accessories;
- Toilet connection seal.



cod. **889680** Black




QUARZO

Medium-low Position

OLIPURE* the best solution for a perfect hygiene in the bathroom.

Internal system that pumps cleaning liquid in each flush. This way the cleaning liquid is always in a closed circuit, unlike traditional cleaning tablets that are always in contact with water, causing possible damages to components in the cistern.

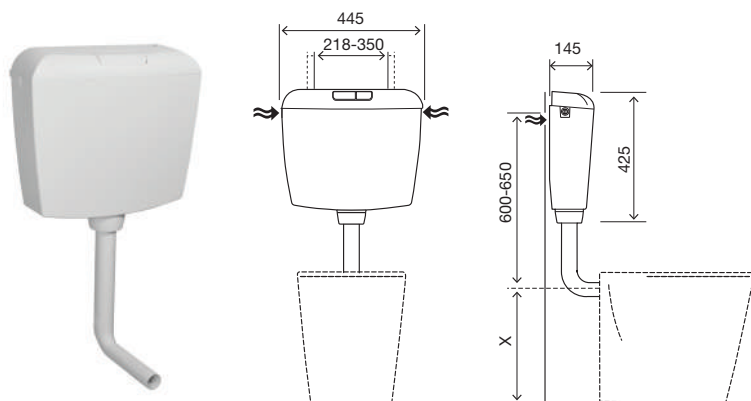

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 9/4L in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections three positions**;
- EN 14055 CE marking;
- White PS material;
- 145mm thick.

** To connect the water in the back position it is necessary to purchase a flexible or elbow connection.

INCLUDES

- Flush pipe Ø50/40;
- Wall fixation accessories;
- Toilet connection rubber seal.





* We recommend using chlorine-free liquid detergents with a viscosity between 150 and 300 cp (at 20°C). cp stands for "centipoise", a unit of measurement for viscosity.

cod. **124427** White

cod. **154961** OLIPure White

ONIX PLUS

Medium-low/Close coupled application

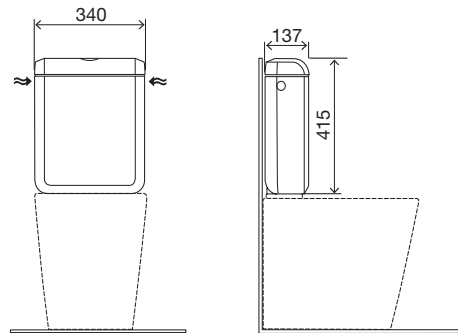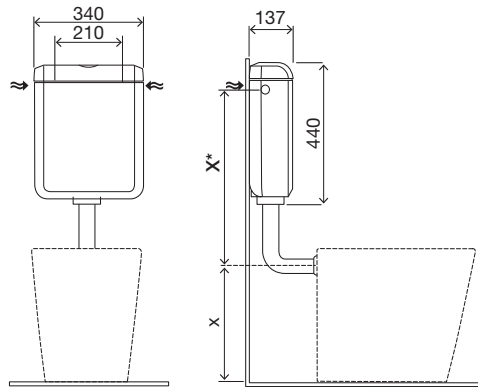

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 4/2L in the outlet valve);
- Medium installation or close couple;
- Acoustic and anti-condensation internal lining;
- Delayed refilling inlet valve;
- Silent inlet valve;
- Water supply connections Three positions;
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- White PS material;
- 137mm thick.

* To connect the water in the back position, it is necessary to purchase a flexible or elbow connection

INCLUDES


- Close couple fixation kit;
- Flush pipe Ø50/40 for medium level installation;
- Wall fixation accessories;
- Toilet connection rubber seal.



cod. **340221** Medium-low/Close coupled application

SMERALDO

Medium-low Position

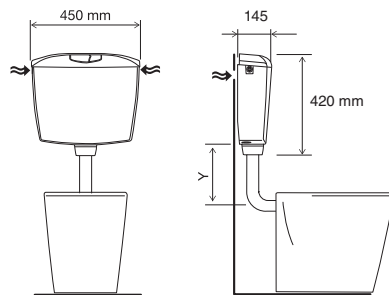

Y	MIN	MAX
Ø40	90	332

SPECIFIC FEATURES

- Dual flush 6/3L;
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections three positions;
- EN 14055 CE marking;
- White PS material;
- 145mm thick;
- ½" plastic connection.

INCLUDES


- Flush pipe Ø50/40;
- Wall fixation accessories;
- Toilet connection rubber seal.



cod. **012220** Medium-low position

TOPAZIO DD

Medium-low Position

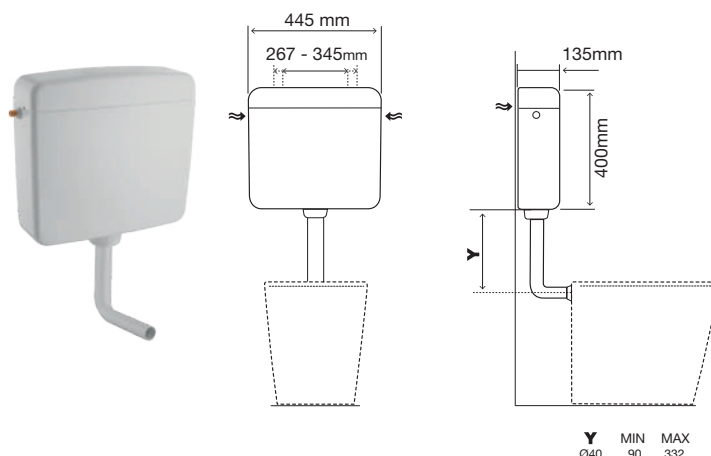

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 9/4L in the outlet valve);
- Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections Three positions;
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- White PS material;
- 135mm thick.

INCLUDES


- Flush pipe Ø50/40;
- Wall fixation accessories;
- Toilet connection rubber seal.



cod. **416201** With ½" stop valve

ZAFFIRO DD

Close-coupled

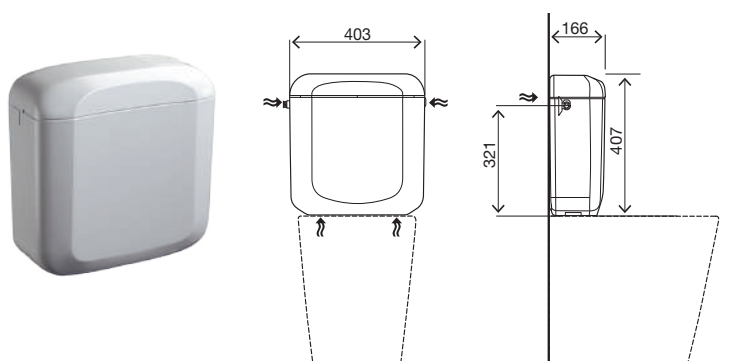

SPECIFIC FEATURES

- Dual flush 6/3L (adjustable to 9/4L in the outlet valve);
- Close couple installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Water supply connections three positions;
- Some versions compliant with: KIWA;
- EN 14055 CE marking;
- White PS material;
- 166mm thick.

INCLUDES

- Close-couple fixation kit.




cod. **002426** bottom connection
 cod. **425201** side connection
 with ½" stop valve





OLISTYLE

High position

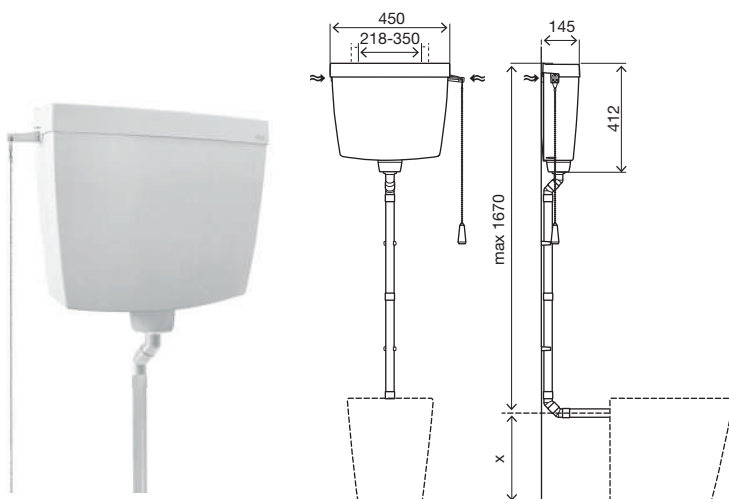

SPECIFIC FEATURES

- High level exposed tank with single flush 9L (adjustable to 6L in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- 145mm thick;
- Adjustable wall fixation system;
- Water supply connections Three positions;
- EN 14055 CE marking;
- White PS material.

INCLUDES

- Chain for high level installation;
- 4 modular flush pipes Ø32;
- Wall fixation accessories;
- Toilet connection rubber seal Ø32.




cod. **440141** High position

cod. **219759** High position - SASO

TOPAZIO

High position

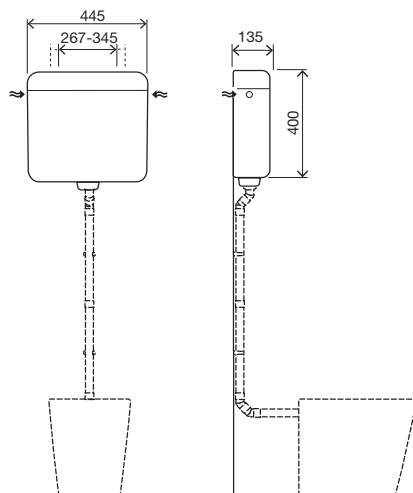

SPECIFIC FEATURES

- High level exposed tank with single flush 9L (adjustable to 6L in the inlet valve);
- Actuation in the Lid push button or pneumatic button (pneumatic push buttons page 142);
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- 135mm thick;
- Adjustable wall fixation system;
- Water supply connections Three positions;
- EN 14055 CE marking;
- White PS material.


INCLUDES

- Wall fixation accessories.

cod. **413781** High position

TURCHESE

High position

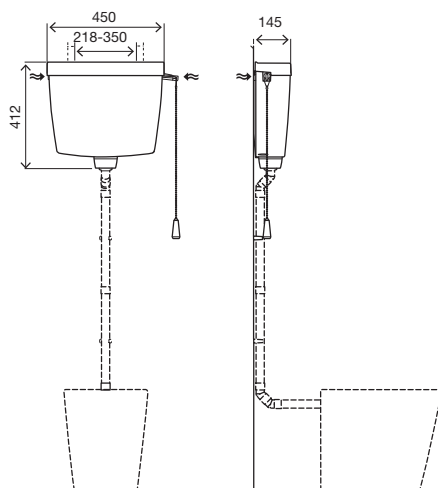

SPECIFIC FEATURES

- High level exposed tank with single flush 6L (adjustable to 9L in the inlet valve);
- Actuation in the push button or pulling a chain;
- High/Medium/low level installation;
- Acoustic and anti-condensation internal lining;
- Silent inlet valve;
- Adjustable wall fixation system;
- Water supply connections three positions;
- Compatible with Ø32 flush pipes;
- Pneumatic version available
- EN 14055 CE marking;
- White PS material;
- 145mm thick.

INCLUDES

- Chain for high level installation;
- Wall fixation accessories;
- Toilet connection rubber seal Ø32.



cod. **440881** pneumatic version



ACCESSORIES EXPOSED FLUSH CISTERNS



- Flush pipe set for high exposed cisterns;
- Height 1000mm;
- Toilet connection Ø32;
- Cistern connection Ø50.

COD	
490601	Medium/high cisterns (complete)
490501	Medium/high cisterns (split)



- Medium/high installations.

COD	
490301	H600, L 210 Ø 32 White
490151	H600, L 210 Ø 40 White
490401	H1000, L 210 Ø 40 White



- Medium/Low installations.

COD	
490001	H325, L 210 Ø 32 White
490681	H325, L 210 Ø 40 White
490130	H325, L 350 Ø 40 White




- Internal hygienic system;
- 3/8" brass side seal;
- Refill pipe connection 350 mm;
- 130 mm flush valve pipe connection;
- for use with ceramic with side connections and Quarzo cisterns.

COD	
157022	OLIpure Kit AZOR



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD	
889944	AMBIWAVE

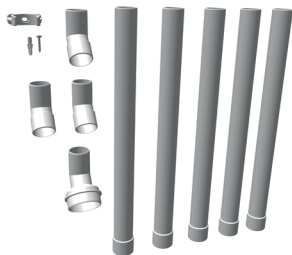

- Flush pipe modules for high exposed cisterns;
- 5 flush pipes Ø32;
- 3 flush pipe bend Ø32;
- Flush pipe bend connection Ø32/50;
- Flush pipe support with fixation screw.

COD

490881

Modular flush pipe




- Set for high exposed cisterns;
- 1 flush pipe 350mm Ø32;
- 1 flush pipe 500mm Ø32;
- 1 flush pipe 1000mm Ø32.

COD

490701

Flush pipe Ø32



- Pneumatic kit for Topazio exposed cistern;
- Push button not supply.

COD

087617

Topazio pneumatic kit



- Single flush;
- Pneumatic actuation;
- ABS material.
- Fixing material;
- Aesthetic covering pipe 1000m
- Pneumatic flexible pipe 2500mm

COD

605101

Pneumatic push button actuator



- Can be installed after the cistern is installed inside the wall.


COD




883088

Flow rate reducer



PART NUMBER GUIDE

										kiwa
	Dual Flush	OLIpure	Start/Stop	Medium-low position	Close coupled position	High position	Pneumatic version	Silent inlet valve	Anti-condensation lining	
 ECO.OPALA 	889680			●				●		
 QUARZO	124427	154961	-	●	-	-	-	●	●	-
 SMERALDO	012220	-	-	●	-	-	-	●	●	-
 ONIX PLUS	340221	-	-	●	●	-	-	●	●	●
 TOPAZIO DD	416201 with stop valve	-	-	●	-	-	-	●	●	●
 TOPAZIO	-	-	413781	●	-	●	●	●	●	-
 ZAFFIRO DD	425201 with stop valve	-	-	-	●	-	-	●	●	●
	002426 Bottom connection									
 TURCHESE	-	-	440201 with stop valve	●	-	●	440881	●	●	-
 OLISTYLE	-	-	440141	●	-	●	-	-	-	-
 KIT OLIPURE	-	101768	-	-	-	-	-	-	-	-

 WxDxH	Weight	Qt.	 Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	 Pallet Width	Pallet Length	Weight
400x150x450	2.362	1	0	2.362	80	1.2	0.81	2.43	208.96
453x143x441	2.798	5	764x474x460	13.99	75	1.24	1	2.45	229.85
463x143x431	2.655	1	0	2.655	65	1.2	0.8	2.36	192.575
353x143x456	2.655	5	767x380x491	13.275	75	1.2	0.8	2.44	219.125
446x144x446	3.312	1	0	3.312	65	1.2	0.8	2.385	235.28
446x144x446	3.244	1	0	3.244	65	1.2	0.8	2.385	230.86
408x176x431	3.09	1	0	3.09	60	1.2	0.8	2.305	205.4
408x176x431	2.892	5	916x430x459	14.46	75	1.35	0.86	2.455	236.9
456x146x430	2.637	1	0	2.637	65	1.2	0.8	2.31	191.405
456x146x430	2.751	1	0	2.751	80	1.2	1	2.31	240.08
161x116x261	0.479	17	595x391x500	8.143	340	1.2	0.8	2.16	182.86







NO-TOUCH ACTUATION

An infrared sensor with a detection range of up to 50mm to activate the flush. The NO-TOUCH actuation guarantees maximum hygiene, promoting a safer and cleaner experience.

Designed for durability and efficiency, the support can be powered by 6 long-lasting AA batteries.





BATTERY HOLDER*

Designed for durability and efficiency, the support can be powered by 6 long-lasting AA batteries.

Battery power provides continuous and reliable performance, ideal for maintaining system functionality over a long period.

*Batteries not included.

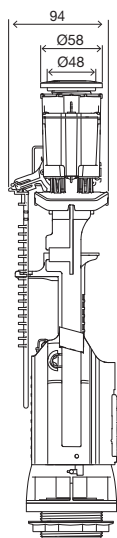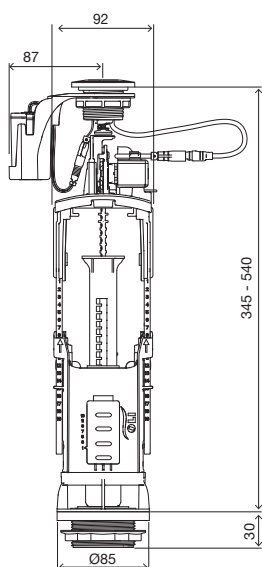

GENERAL FEATURES

- No-touch actuation through hand proximity, built-in infrared sensor;
- Powered by 6 AA batteries (not included);
- Low battery indication via LED signaling;
- Dual flush valve with half and full flush volume regulation;
- Infrared sensor with detection up to 50mm;
- Selection of the discharge through the occlusion time of the infrared sensor;
- Application of the universal top infrared sensor, which does not block the ceramic cover;
- Silent close;
- Telescopic overflow pipe;
- Silicone seal;
- Easy installation and maintenance (click system);
- Certified in accordance with NF and SAI norms.

INCLUDES


- Accessories for fixing the ceramic tank to the toilet;
- Sponge for sealing between the ceramic tank and the toilet (which compensates for ceramic irregularities);
- Chrome sensor button, compatible with ceramic lid holes between Ø38 and Ø50mm;
- Battery holder and box with IP67 protection rating.



cod. **884595** box

ATLAS

Outlet valve

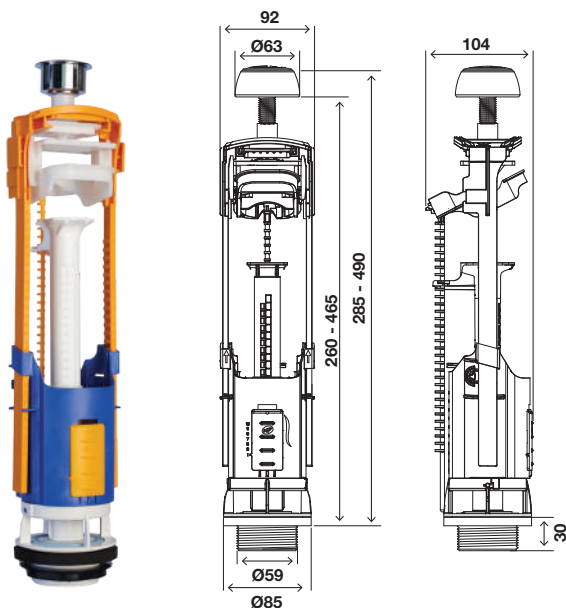

GENERAL FEATURES

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Allows the off center of the button on the ceramic lid (25mm on each axis);
- Mechanical actuation <20N;
- Efficient flush with high flow rate;
- Damping system silent operation;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Silicone seal;
- Upon request some versions compliant with: NF, SAI and WATERMARK.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.




cod. 011967 Box

cod. 135948 Bag

ATLAS CABLE

Outlet valve

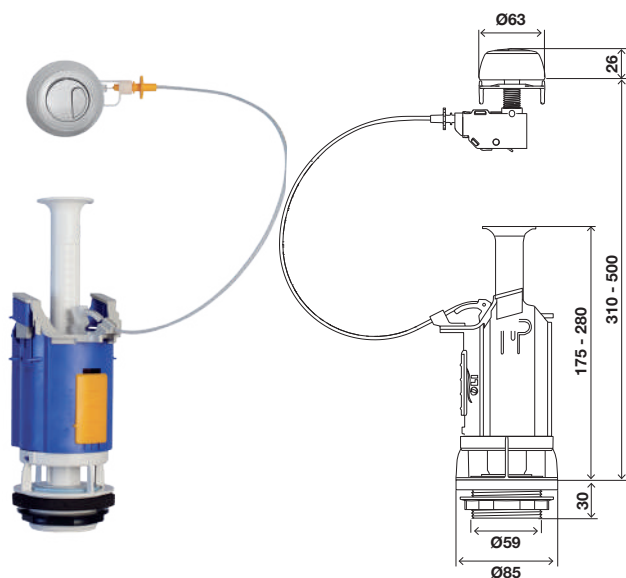

GENERAL FEATURES

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal and flexible application (front, top or side push button position);
- Cable actuation < 20 N;
- Efficient flush with high flow rate;
- Damping system silent operation;
- Adjustable telescopic overflow pipe;
- Silicone seal;
- Upon request some versions compliant with: NF.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.




cod. 022369 Bag

cod. 501120 Box

APOLO

Outlet valve

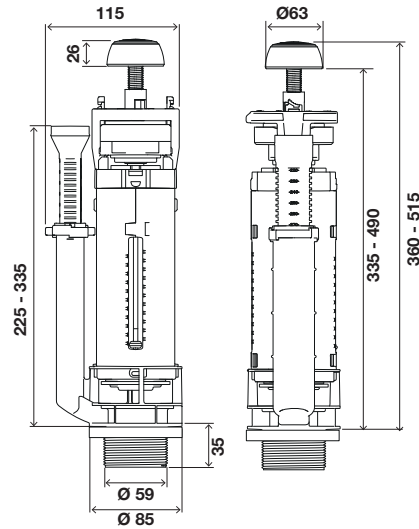

SPECIFIC FEATURES

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Lateral overflow pipe, higher and easy adjustment;
- Lock/unlock system at the top, one step;
- Allows the off center of the button in ceramic lid 360° with 10° of inclination for each axis
- Mechanical actuation <20N;
- Efficient flush with high flow rate;
- Damping system – silent operation;
- Easy maintenance (bayonet system);
- Silicone seal;
- Compliant with: Watermark, NF.

INCLUDES


- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.



cod. 883098

BETA

Outlet valve

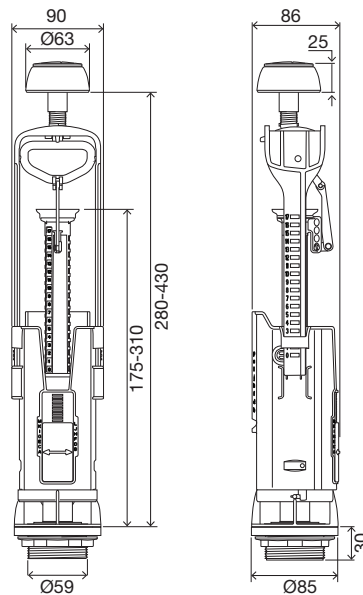

SPECIFIC FEATURES

- Dual flush outlet valve with adjustable half and complete water flush volume;
- Universal top push button position that locks the ceramic lid;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Simpler adjustment of full / half flush;
- Efficient flush with high flow rate;
- Silent operation (damping system);
- According with NF.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø 16 to Ø 60mm.




cod. 884443 Box

FAST START/STOP

Outlet valve



*

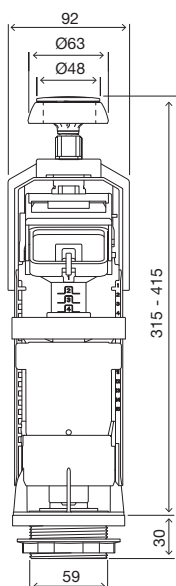

GENERAL FEATURES

- Single flush outlet valve with start/stop system;
- Universal top push button position that locks the ceramic lid;
- Allows the off center of the button on the ceramic lid (20mm on one axis);
- Mechanical actuation <20N;
- Efficient flush with high flow rate;
- Adjustable telescopic overflow pipe and adjustable lever height;
- Easy installation and maintenance (bayonet system);
- Adaptors for older mechanism ceramic support*.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø60mm.




*Adaptors Included in the outlet valve FAST START/STOP. These adaptors are compatible with ROCA ceramic tanks and allow the replacement of the outlet valve without the need to remove the ceramic cistern.

cod. **886421** Bag

cod. **887291** Box*

PUSH ECO

Outlet valve

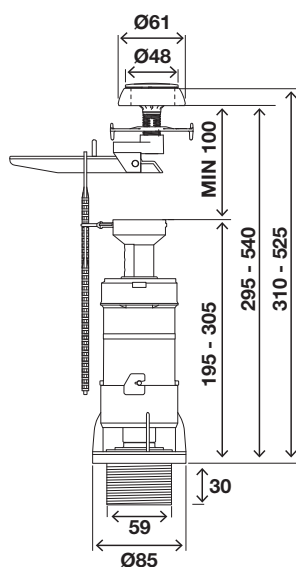

GENERAL FEATURES

- Single flush outlet valve;
- Universal top push button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance;
- EPDM seal.

INCLUDES

- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Self-adjustable chrome push button with rosette for cisterns with lid holes from Ø16 to Ø50mm.




* Adaptor only in box version.

cod. **886108** Box

cod. **887290** Bag

ECO TIRETTE

Outlet valve

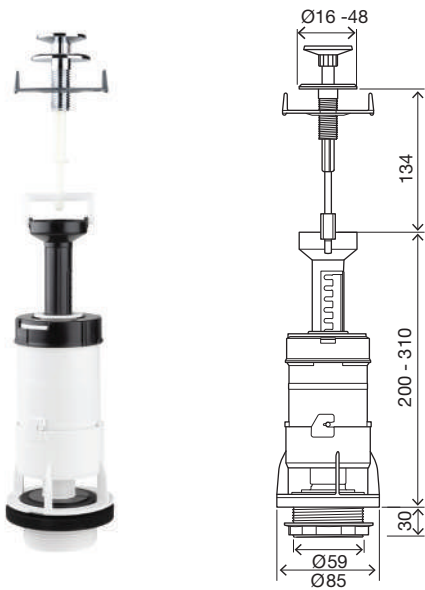

GENERAL FEATURES

- Single flush outlet valve;
- Universal top pull button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance;
- EPDM seal.

INCLUDES


- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Chrome pull button for cisterns with lid holes from Ø16 to Ø40mm.



- cod. **886387** Box for high ceramic tanks
- cod. **886378** Box

HANDLE

Outlet valve

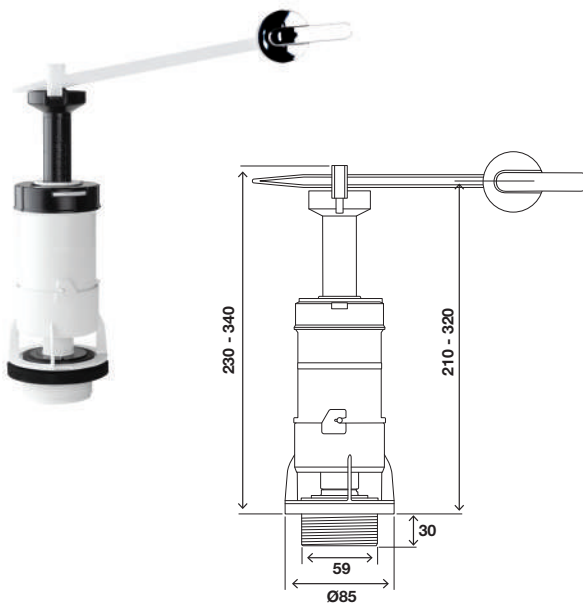

GENERAL FEATURES

- Single flush outlet valve;
- Universal front handle button position;
- Mechanical actuation <20N;
- High flow rate flush;
- Adjustable telescopic overflow pipe;
- Easy installation and maintenance;
- EPDM seal.

INCLUDES


- Ceramic cistern fixation system to the WC toilet;
- WC toilet seal foam (that compensates the ceramic irregularity);
- Chrome handle button for cisterns with Ø16 hole.



- cod. **886428** box Pilette 43
- cod. **887294** box

AG104 PLUS

Inlet valve

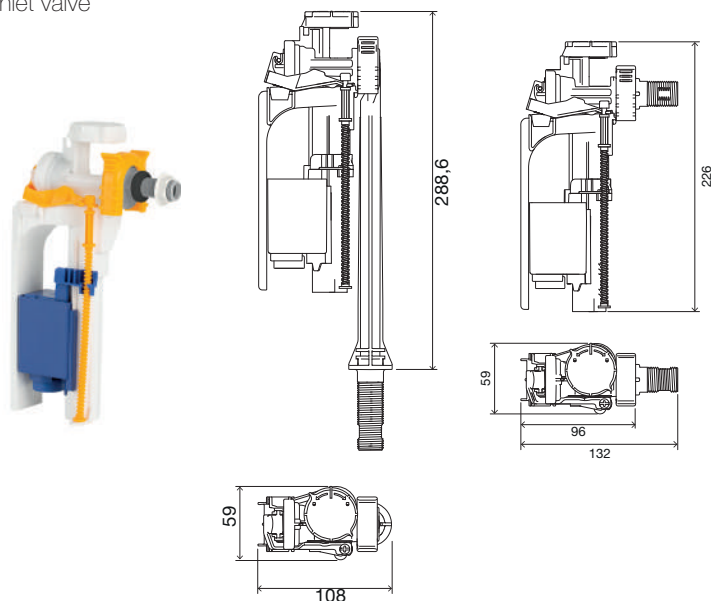

SPECIFIC FEATURES

- New back flow protection to prevent contamination;
- Compliant with UK standards, WRAS;
- Side or bottom water supply with ½" plastic connection;
- Delayed refilling inlet valve: it starts after the outlet valve is in the closed position;
- Easy maintenance without the need to disconnect from the water connection;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar.




cod. **883099** ½" Plastic bag

cod. **883103** ½" Plastic bottom bag

AZOR PLUS

Inlet valve

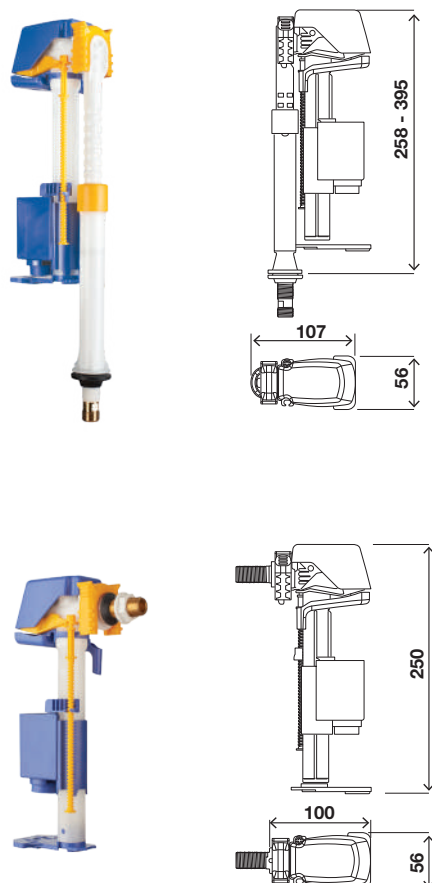

SPECIFIC FEATURES

- Delayed refilling inlet valve: it starts after the outlet valve is in the closed position;
- Side or bottom water supply with ¾" brass and ½" plastic or brass;
- Adjustable height in the bottom connection;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 14 bar;
- Maximum static pressure: 20 bar;
- Silent valve class I;
- Easy maintenance without the need to disconnect from the water connection;
- Anti-backflow function;
- Some versions compliant with, KIWA, UPC, NF (side version), WATERMARK or SABS.






cod. **020864** Bottom ¾" brass box

cod. **020863** Side ¾" brass box

NC100 PLUS

Inlet valve

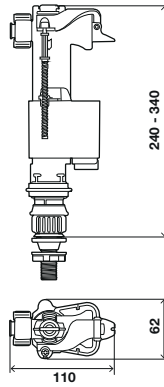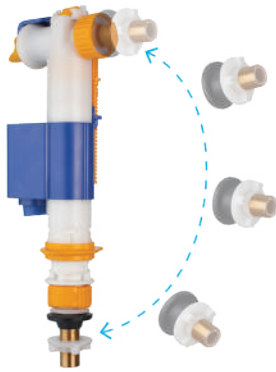

GENERAL FEATURES


- Side or bottom water supply connection in the same inlet valve;
- Integrated filter that can be cleaned without removing the water connection;
- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Side and bottom inlet valve, with 3/8" brass;
- Adjustable height in the bottom connection;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 8 bar;
- Maximum static pressure: 8bar;
- Easy maintenance, no need to disconnect water connection;
- Anti-backflow function.



cod. **883706** 3/8" brass box
 cod. **883818** 3/8" brass bag

OLI ONE

Inlet valve

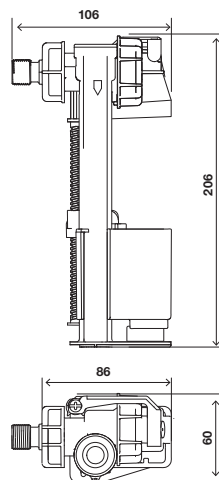

GENERAL FEATURES


- Compatible with in-wall cisterns, exposed and ceramic cisterns, adaptors for competitors compatibility;
- Side water connection with 3/8" brass or 3/8" plastic;
- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Silent inlet valve, class I;
- High performance on dirty waters;
- Counter pressure closing system (hydraulic);
- Effective with any flow pressure:
- Dynamic pressure functioning range: 0.5-10bar;
- Maximum static pressure: 16bar;
- Anti-backflow function.



cod. **884379** OLI ONE

JOLLY UNI

Inlet valve

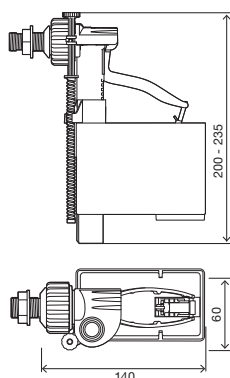

SPECIFIC FEATURES

- Piston closing system (mechanical);
- Side inlet valve, with $\frac{3}{8}$ " or $\frac{1}{2}$ " brass or plastic connection;
- Silent valve, NF class I certified;
- Dynamic pressure functioning range: 0.5 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-Backflow function;
- Some versions compliant with: NF or KIWA.




cod. **560170** $\frac{1}{2}$ " brass box

cod. **561460** $\frac{3}{8}$ " brass box

UNI BOTTOM

Inlet valve

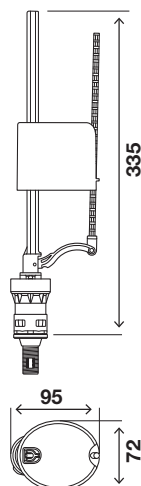

GENERAL FEATURES

- Bottom inlet valve, with $\frac{3}{8}$ " or $\frac{1}{2}$ " in brass or plastic connection;
- Piston closing system (mechanical);
- Dynamic pressure functioning range: 0.5 – 8 bar;
- Maximum static pressure: 10 bar.



cod. **022371** $\frac{1}{2}$ " brass bag

cod. **044995** $\frac{1}{2}$ " plastic bag


cod. **879622** $\frac{3}{8}$ " brass bag

cod. **562160** $\frac{3}{8}$ " brass box

cod. **563571** $\frac{3}{8}$ " plastic bag

COMPACT

Inlet valve

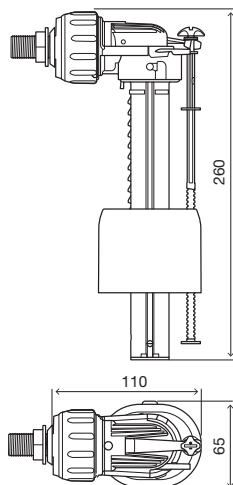

SPECIFIC FEATURES

- Side inlet valve, brass connection;
- Reduced dimensions;
- Silent valve, class I;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.1 – 10 bar;
- Maximum static pressure: 16 bar;
- Anti-backflow function;
- Some versions compliant with: KIWA, NF.




cod. **561598** $\frac{3}{8}$ " brass bag

cod. **880305** $\frac{3}{8}$ " brass box

ECO

Inlet valve

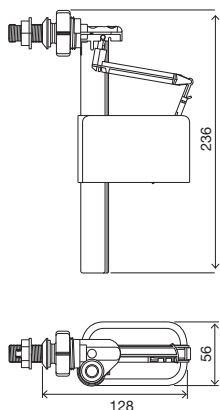

SPECIFIC FEATURES


- Piston closing system (mechanical);
- Side inlet valve, with $\frac{3}{8}$ " plastic connection;
- Dynamic pressure functioning range: 0.5 - 8 bar;
- Maximum static pressure: 10 bar;
- Anti-backflow function.



cod. **561058** $\frac{3}{8}$ " plastic bag

MC102 PLUS

Inlet valve

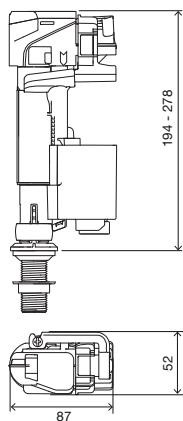

SPECIFIC FEATURES


- Quick filling;
- Compliant with UPC;
- Bottom inlet valve with $\frac{1}{2}$ " brass, plastic or 15/16" in plastic connection;
- Delayed refilling inlet valve: it starts after the outlet valve is in the close position;
- Height adjustable;
- Silent inlet valve, class I;
- Integrated filter can be cleaned;
- Counter pressure closing system (hydraulic);
- Dynamic pressure functioning range: 0.5-6bar;
- Maximum static pressure: 16bar;
- Anti-backflow function.



cod. **879285** $\frac{1}{2}$ " plastic bag

cod. **878737** 15/16" plastic bag

OLIPURE KIT

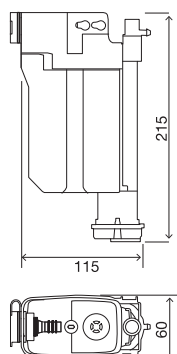

SPECIFIC FEATURES

- OLIPure system;
- Azor side $\frac{3}{8}$ " brass connection;
- 350mm Refill connection pipe;
- 130mm Outlet valve connection pipe;
- Only suitable for ceramic cisterns with side connections and Quarzo exposed cistern.



cod. **101768** Box

MECHANISMS KIT

	ATLAS CABLE 	PUSH ECO 	FAST START STOP 	BETA 
UNI BOTTOM 	883625 bag	886333 bag	886489 bag	-
ECO 	-	886098 bag 889565 3/8 Brass bag	-	-
COMPACT ASTRO 	882003 bag	-	886328 bag	887860 bag
IVC100 	099938 bag	-	-	-

ACCESSORIES MECHANISMS



- Plugs for ceramic cisterns with bottom connection.

COD

058025

Bottom Plug



- Liquid disinfectant for toilet;
- 450ml dosage;
- 6 units per pack.

COD

889944

AMBIWAVE



- Cover for side connection ceramic tanks.

COD
















493065




Polished Chrome

493064

















White




PART NUMBER GUIDE

				Dimensions	compliance		
	Dual Flush	Single flush	Start/Stop				
eALAS 	884595 bag			288(H) 108 x 58 (W x D)			
APOLO 	883098 box	-	-	288(H) 108 x 58 (W x D)	●	-	●
BETA 	884443 box	-	-	288(H) 108 x 58 (W x D)	●	-	-
ATLAS CABLE 	022369 bag 501120 box	-	-	288(H) 108 x 58 (W x D)	●	-	-
ATLAS 	135948 bag 011967 box	-	-	288(H) 108 x 58 (W x D)	●	-	●
FAST STAR/STOP 	-	-	886421 bag 887291 box	288(H) 108 x 58 (W x D)	-	-	-
PUSH ECO 	-	887290 bag 886108 box	-	288(H) 108 x 58 (W x D)	-	-	-
TIRETTE ECO 	-	886387* box 886378 box	-	288(H) 108 x 58 (W x D)	-	-	-
HANDLE 	-	886428 box	-	288(H) 108 x 58 (W x D)	-	-	-




									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
59x59x101	0.586	12	595x391x500	7.032	400	1.2	0.8	2.32	254.4
121x121x371	0.73	16	595x391x535	11.68	256	1.2	0.8	2.3	206.88
119x105x355	0.502	20	595x391x500	10.04	320	1.2	0.8	2.16	180.64
300x0.07x550	0.374	30	595x391x500	11.22	480	1.2	0.8	2.16	199.52
119x105x311	0.468	20	595x391x500	9.36	400	1.2	1	1.66	207.2
300x0.07x550	0.462	26	595x391x500	12.012	520	1.2	0.8	2.66	260.24
119x105x355	0.563	20	595x391x500	11.26	400	1.2	1	2.16	245.2
300x0.07x550	0.399	20	595x391x500	7.98	400	1.2	0.8	2.66	179.6
121x121x371	0.578	12	595x391x500	6.936	240	1.2	0.8	2.66	158.72
300x0.07x550	0.346	20	595x391x500	6.92	400	1.2	1	2.66	158.4
119x105x311	0.411	20	595x391x500	8.22	400	1.2	1	2.16	184.4
119x105x311	0.388	20	595x391x500	7.76	500	1.2	1	2.66	214
119x105x311	0.389	20	595x391x500	7.78	500	1.2	1	2.66	214.5
119x105x311	0.406	20	595x391x500	8.12	500	1.2	1	2.66	223

PART NUMBER GUIDE


	Bottom water supply		Side water supply		Upon request versions compliant with					
										
 OLI ONE	-	-	884379 3/8" brass/plastic box		-	-	-	-	-	-
 AG104 PLUS	883103 1/2" plastic bag	-	-	-	●	-	-	-	●	-
	-	-	883099 1/2" plastic bag		●	-	-	-	●	-
 AZOR PLUS	020864(bottom) 3/8" brass box		-	-	-	-	●	●	-	-
	020863 (side) 3/8" brass box		-	-	-	●	●	●	-	●
 IVC100 PLUS	883706 3/8" brass box		-	-	-	-	-	-	-	-
	883818 3/8" brass bag		-	-	-	-	-	-	-	-
 IVC102 PLUS	879285 1/2" plastic bag	-	-	-	-	-	-	-	-	-
	878737 15/16" plastic bag	-	-	-	-	-	-	-	-	●
 COMPACT	-	-	880305 3/8" brass box	-	-	●	●	-	-	-
	-	-	561598 3/8" brass bag	-	-	●	●	-	-	-
 JOLLY UNI	-	-	561460 3/8" brass box	560170 1/2" brass box	-	●	●	-	-	-
 UNI BOTTOM	879622 3/8" brass bag	022371 1/2" brass bag	-	-	-	-	-	-	-	-
	563571 3/8" plastic bag	044995 1/2" plastic bag	-	-	-	-	-	-	-	-
	562160 3/8" brass box		-	-	-	-	-	-	-	-
 Eco	-	-	561058 3/8" plastic bag		-	-	-	-	-	-
 OLIpure Kit	-	-	101768		-	-	-	-	-	-

 WxDxH	Weight	Qt.	 Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	 Pallet Width	Pallet Length	Weight
111x71x261	0.347	40	595x391x500	13.88	800	1.2	0.8	2.65	297.6
260x0.07 x460	0.257	50	595x391x500	12.85	1000	1.2	0.8	2.66	277
260x0.07 x460	0.199	50	595x391x500	9.95	1000	1.2	0.8	2.66	219
146x76x326	0.357	20	600x400x435	7.14	400	1.2	0.8	2.34	162.8
151x71x261	0.296	30	595x391x500	8.88	600	1.2	0.8	2.65	197.6
151x71x261	0.969	30	595x391x500	29.07	600	1.2	0.8	2.66	601.4
260x0.07 x460	0.305	50	595x391x500	15.25	1000	1.2	0.8	2.66	325
260x0.050x480	0.229	35	595x391x500	8.015	700	1.2	0.8	2.66	180.3
210x0.03x330	0.244	35	595x391x250	8.54	700	1.2	0.8	1.41	190.8
151x71x261	0.303	30	595x391x500	9.09	600	1.2	0.8	2.65	201.8
260x0.07 x460	0.238	60	595x391x500	14.28	1200	1.2	1	2.16	305.6
151x71x261	0.225	30	595x391x500	6.75	600	1.2	0.8	2.66	155
200x0.1x530	0.153	40	595x391x500	6.12	800	1.2	1	2.16	142.4
101x86x401	0.215	20	595x391x500	4.3	400	1.2	0.8	2.66	106
260x0.07 x460	0.123	100	760x496x480	12.3	1200	1.27	1	2.1	167.6
161x116x261	0.479	17	595x391x500	8.143	340	1.2	0.8	2.16	182.86



		RIVER		LAKE			
		WALL-HUNG		FLOOR	WALL-HUNG		
							
OLI174 PLUS	DIRECT			●			
	SIMFLEX	●	●			●	
	S90 SANITARBLOCK	●	●			●	
OLI120 PLUS	DIRECT			●	●		
	BLOCK	●	●			●	
	SANITARBLOCK	●	●			●	
QUADRA PLUS	DIRECT			●	●		
	SANITARBLOCK	●	●			●	
OLI180	DIRECT			●	●		
	SIMFLEX	●	●			●	
	SANITARBLOCK	●	●			●	
EXPERT PLUS	DIRECT			●			
	SIMFLEX	●	●			●	
	SANITARBLOCK	●	●			●	
RIM OFF	YES	●		●		●	
	NO						
COLOURS/FINISHES	white	●		●		●	
	Satin white						
	Black matte					●	
	Satin grey						
	Anthracite matte						
	Sand matte						
	Cappuccino matte					●	

*HYGEA installation kit necessary COD CM04000886319.

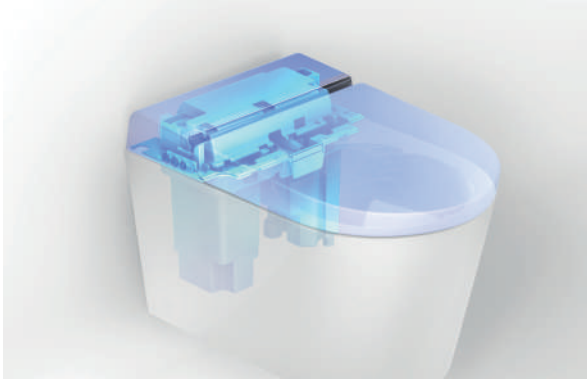

SMART TOILET
hygienic and innovative modular system



ELECTRONIC BIDET
can be installed or replaced very easily
(like a cartridge)



REMOTE CONTROL
allows customised operation




WATER CONNECTION KIT
(Order separately)



GENERAL FEATURES


- Silent mode;
- Cleaning modes (both genders): 2;
- User's memories: 2;
- Nozzle oscillation;
- Adjustable water pressure;
- Adjustable nozzle position;
- Adjustable water temperature;
- Special functions: Auto | Children;
- Certifications: SVGW, DVGW, RoHS, CE.

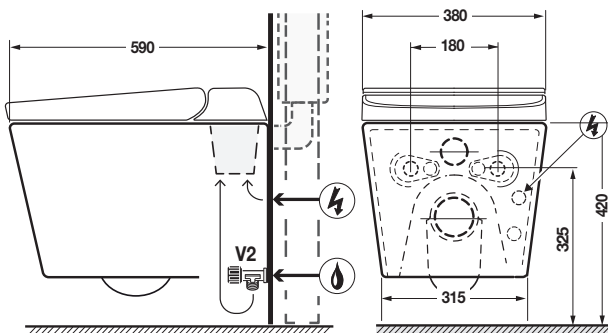

- cod. **RB20100888514** White
- cod. **RB20100888515** White Matte
- cod. **RB20100888516** Anthracite Matte
- cod. **RB20100888718** Grey matte
- cod. **RB20100888517** Sand matte
- cod. **RB20100889506** Black matte
- cod. **CM04000886319** Kit washlet Hygea

HYGEA
Smart toilet

SEAT & COVER
Soft-close seat & cover
with the main bidet
functions integrated



ELECTRONIC BIDET
Easy access without
compromising toilet use.



**FIXING AND
INSULATION PLATE**



RIM-OFF
Greater hygiene and
ease of cleaning.

White



White matte



Anthracite matte



Grey matte



Sand matte



Black matte





RIM-OFF TOILET
without closed rim



Sewer and water connections
WITH GLAZED FINISH




SEAT & COVER WITH
TAKE-OFF system for perfect cleaning



strong seat cover with
SOFT-CLOSE SYSTEM

RIVER

White wall-hung toilet

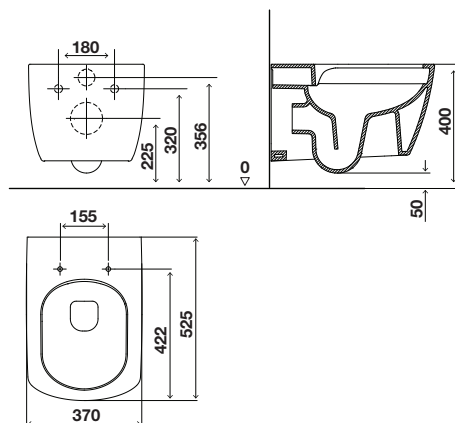


GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Concealed fixation;
- Flush volume: 6L;
- CE Marking.

cod. **RA20200888237** White

SEAT & COVER COVER 01

White

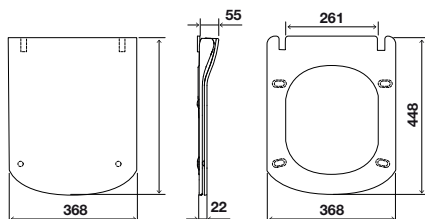


GENERAL FEATURES

- Material: Duroplast;
- Shape: Rectangular;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

cod. **RD10000888262** White

RIVER

White wall-hung bidet

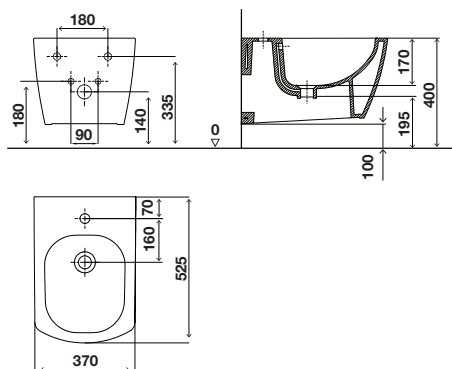

GENERAL FEATURES

- Material: Vitreous China;
- Shape: Rectangular;
- Concealed fixing;
- CE Marking.

cod. **RC20200888245** White

LAKE





NEW FINISH
White pearl matte



NEW FINISH
Cappuccino matte




NEW FINISH
Black Matte



NEW FINISH
White



RIM-OFF TOILET
without closed rim

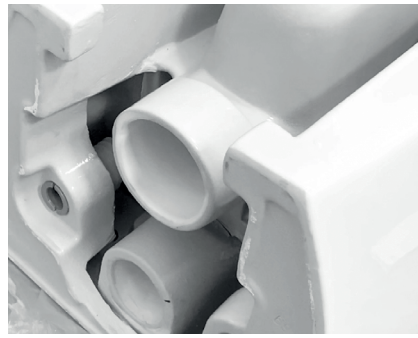

Sewer and water connections
WITH GLAZED FINISH




seat cover with
CLIPP-OFF SYSTEM FOR PERFECT CLEANING



strong seat cover with
SOFT-CLOSE SYSTEM

LAKE

wall-hung

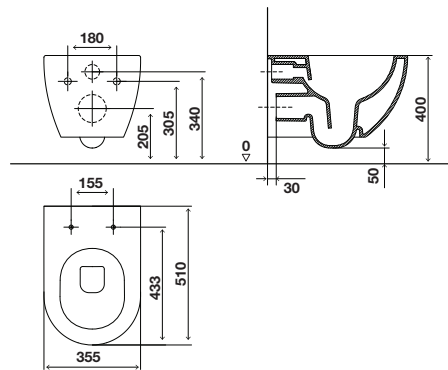


GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Concealed fixation;
- Flush volume: 6L;
- CE Marking.

cod. RA20100888231	White
cod. RA20100888236	Black
cod. RA20100889996	Matte white pearl
cod. RA20100889995	Cappuccino matte

SEAT & COVER COVER 02

White and black mate

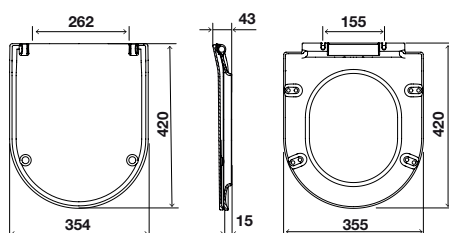

GENERAL FEATURES


- Material: Duroplast;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system
- Soft-close;
- Certifications: NF.

cod. **RD10000888360** White

cod. **RD10000888361** Black

SEAT & COVER COVER 06

Matte white pearl and cappuccino matte

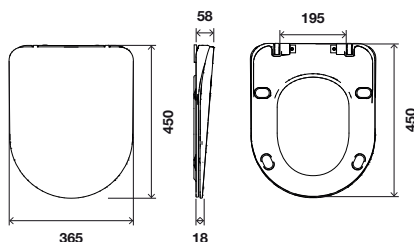

GENERAL FEATURES


- Material: Duroplast;
- Shape: Round;
- Slim seat;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

cod. **RD10000889998** Matte white pearl

cod. **RD10000889997** Cappuccino matte

LAKE

White wall-hung bidet

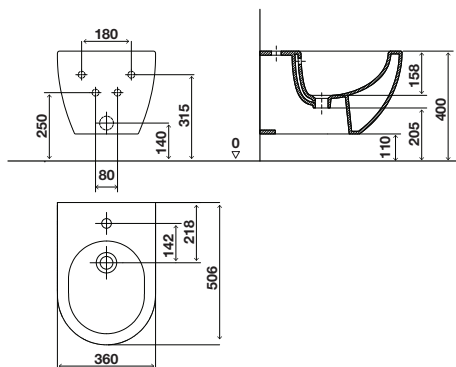

GENERAL FEATURES

- Material: Vitreous China;
- Shape: Round;
- Concealed fixation;
- CE Marking.

cod. **RC20100888241** White

cod. **RC20100888243** Black





RIM-OFF TOILET
without closed rim



sewer and water connections
WITH GLAZED FINISH




SEAT COVER WITH CLIPP-OFF
system for perfect cleaning



strong seat cover with
SOFT-CLOSE SYSTEM

LAKE

back to wall toilet

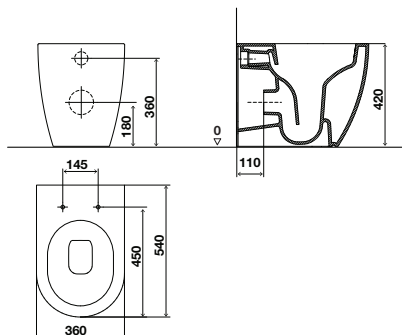


GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Semi-concealed fixation;
- Flush volume: 5L;
- CE Marking.

cod. **RA10100888232** White

SEAT & COVER COVER 06

white

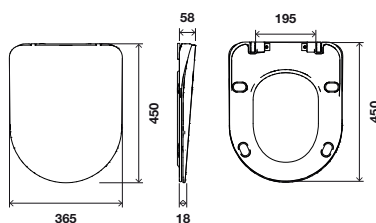


GENERAL FEATURES

- Material: Duroplast;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

cod. **RD10000889177** White

SEAT & COVER COVER 04

white




GENERAL FEATURES

- Material: Duroplast;
- Shape: Round, box-type;
- Antibacterial;
- Top fixation top fastening system;
- Soft-close.

cod. **RD10000888605** White

LAKE

back to wall bidet

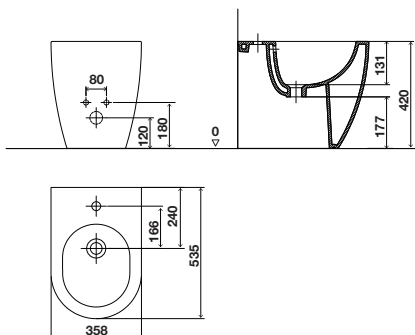

GENERAL FEATURES

- Material: Vitreous China;
- Shape: Round;
- Semi-concealed fixation;
- CE Marking.

cod. **RC10100888239** White



RIM-OFF
toilet without closed rim



Sewer and water connections
WITH GLAZED FINISH




SEAT COVER WITH CLIPP-OFF
system for perfect cleaning



Tampo robusto com sistema
SOFT-CLOSE SYSTEM

LAGOON

Wall-hung toilet

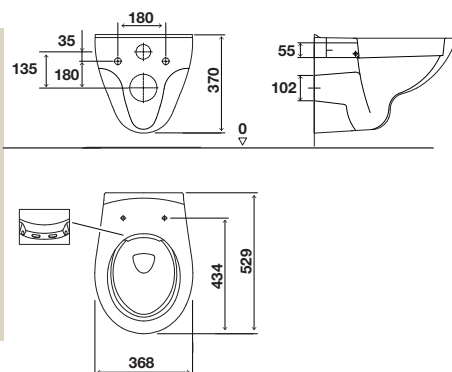


cod. **RA20300888238** White

GENERAL FEATURES

- Material: Vitreous China;
- Rim-Off, no rim;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Visible fixation;
- Flush volume: 6L;
- CE Marking: EN

SEAT & COVER COVER 03

white

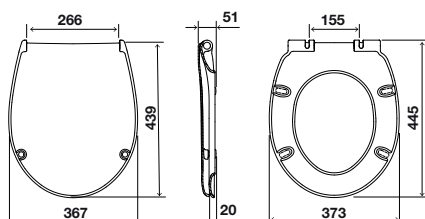


cod. **RD10000888362** White

GENERAL FEATURES

- Material: Duroplast
- Shape: Round
- Antibacterial
- Top fixation top fastening system
- Soft-close.

LAGOON

Bidet Wall-hung

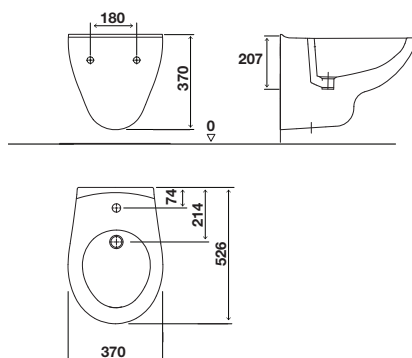

cod. **RC20300888246** White


GENERAL FEATURES

- Material: Duroplast;
- Colour: White;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system
- Soft-close.



LAGOON

back to wall toilet

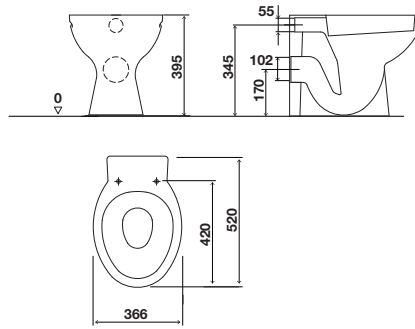


GENERAL FEATURES

- Material: Vitreous China;
- Sewer outlet: Horizontal connection to the wall (P-Trap);
- Water inlet and sewer outlet connections with internal glazing;
- Semi-concealed fixation;
- Flush volume: 6L/ 4L;
- CE Marking: EN.

cod. **RA10300888233** White

SEAT & COVER COVER 05

white

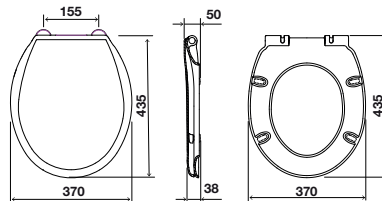


GENERAL FEATURES

- Material: Thermoplast;
- Shape: Round;
- Antibacterial;
- Top fixation top fastening system
- Soft-close.

cod. **RD10000888606** White

LAGOON

Back to wall bidet

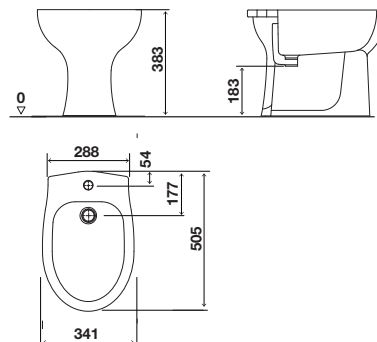

GENERAL FEATURES

- Material: Vitreous China;
- Semi-concealed fixation.

cod. **RC10300888240** White

COMPATIBILITY

URINAL / FRAMES / FLUSH PLATE

				
	URINAL FRAME	OLI120 PLUS WC / URINAL	CONCEALED PRE-INSTALLATION	EASY STRUCTURE
<p>KAI</p>  	●	●		
<p>URINAL DIVIDER</p> 				● 000079 Ceramic white
<p>CERAMIC DIVIDER</p> 				● 889764 Ceramic white 889765 Ceramic black
<p>BLINK URINAL</p> 	●	●	● 882264	
<p>GLOBE URINAL</p> 	●	●	● 878822 Gold plated 878819 Matte chrome 878818 Polished chrome 878466 White 885580 White Antibacterial	
<p>EAQUA URINAL AC AND BATTERY</p> 			● 879120 eAQUA URINAL Inox AC 879119 eAQUA URINAL Inox BATT	


SANITARY WARE





KAI

Wall-mounted urinal

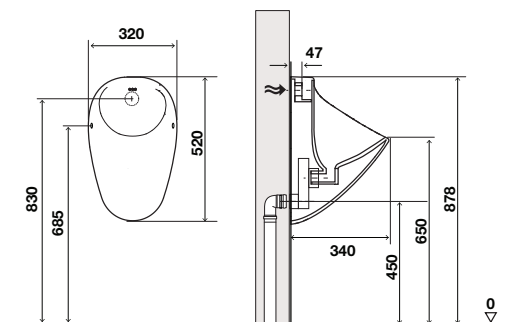

GENERAL FEATURES


- Material: Vitreous China;
- Colour: White or Black;
- Rim-off, rimless design;
- Back supply connection;
- Siphonic Siphon ;
- Fixing type: Semi-visible;
- Shape: Oval;
- CE Marking.

INCLUDES

- Fixing accessories and Siphon .

cod. **RE20100889511** White
 cod. **RE20100889512** Black matte

CERAMIC DIVIDER

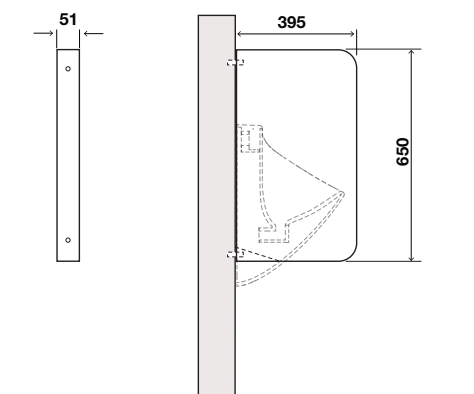

GENERAL FEATURES


- Material: Vitreous China;
- Hidden fixing;
- Shape: Rectangular;
- Compatible with the Easy structure.

INCLUDES

- Installation accessories.

cod. **RE30100889764** White
 cod. **RE30100889765** Black

URINAL DIVIDER

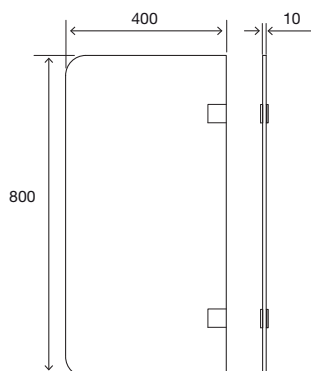

GENERAL FEATURES

- Frosted and tempered glass 8mm thick;
- Stainless steel fixing accessories;
- Application/Direct Fixation to the wall, drywall or thin wall/plasterboard;
- Compatible with the Easy structure.

INCLUDES



- Installation accessories.

cod. **OC1000000079** Frosted glass





VIOLET 

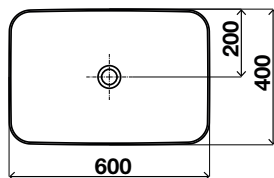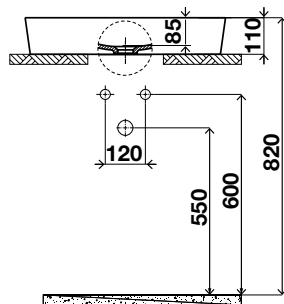

GENERAL FEATURES

- Material: Vitreous China;
- Colour: white, white pearl matte, black matte, cappuccino matte;
- Shape: Rectangular;
- Thickness: 5mm;
- Without tap hole and overflow;
- Valve not included;
- CE Marking: EN 14688.


COMBINATION

See page 226.



- cod. **RF10100890034** White
- cod. **RF10100890035** White pearl matte
- cod. **RF10100890036** Black Matte
- cod. **RF10100890037** Cappuccino matte

BREEZE

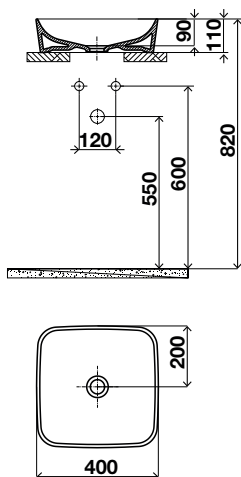

GENERAL FEATURES

- Material: Vitreous China;
- Colour: white, white pearl matte, black matte, cappuccino matte;
- Shape: Square;
- Thickness: 5mm;
- Without tap hole and overflow;
- Valve not included;
- CE Marking: EN 14688.


- cod. **RF10100890038** White
- cod. **RF10100890039** White pearl matte
- cod. **RF10100890040** Black matte
- cod. **RF10100890041** Cappuccino matte

COMBINATION

See page 226.



SERENNA

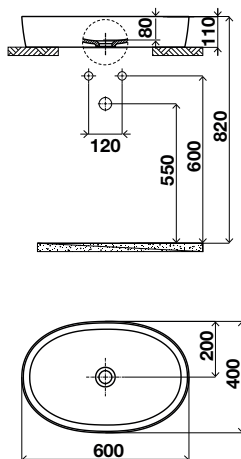

GENERAL FEATURES

- Material: Vitreous China;
- Colour: white, black matte, cappuccino matte;
- Shape: Oval;
- Thickness: 5mm;
- No hole for tap or overflow;
- Without tap hole and overflow;
- CE Marking: EN 14688.


- cod. **RF10100890027** White
- cod. **RF10100890028** Black matte
- cod. **RF10100890029** Cappuccino matte

COMBINATION

See page 226.



SUN

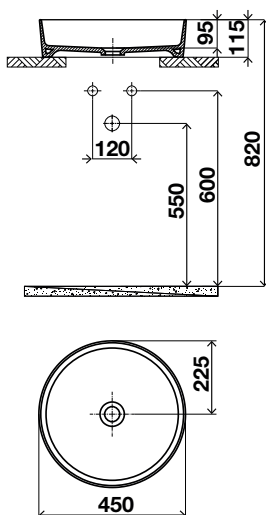

GENERAL FEATURES

- Material: Vitreous China;
- Colour: white, white pearl matte, black matte, cappuccino matte;
- Shape: Round;
- Thickness: 5mm;
- Without tap hole and overflow;
- Valve not included;
- CE Marking: EN 14688.

- cod. **RF10100890030** White
- cod. **RF10100890031** White pearl matte
- cod. **RF10100890032** Black matte
- cod. **RF10100890033** Cappuccino matte

COMBINATION

See page 226.




SANITARY WARE ACCESSORIES




COD
889829 Set of Seat & cover stoppers seat 01




COD
889831 Fixation kit accessories for Seat & cover 01




COD
889913 Set of white Seat & cover plugs 02
889914 Set of black Seat & cover plugs 02




COD
889915 Fixation kit accessories for Seat & cover 02




COD
889916 Set of Seat & cover stoppers seat 02



COD
889917 Fixation kit accessories for Seat & cover 03




COD
889918 Set of Seat & cover plugs 03/04



COD

889919

Set of Seat & cover stoppers seat 03/04



COD

889920


Fixation kit accessories for Seat & cover 04



COD

889966


Set of Seat & cover plugs 05



COD

889921

Fixation kit accessories for Seat & cover 05



COD

889927

Set of Seat & cover stoppers seat 05



COD

889826

Fixation kit accessories with short allen wrench (60x120mm)



COD

889828

Fixation kit accessories with short allen wrench (60x205mm)





COD

889832

Fixation kit for back to wall



COD

889833

Hidden fixation kit for Toilet Lake

889834

Hidden fixation kit for Bidet Lake



COD

889835

Hidden fixation kit for Toilet/Bidet Lake



COD

890103

Fixation kit accessories for back to wall



COD

890104


Overflow Ring



COD

889979

Fixation kit accessories for URINAL



COD

889982

Urinal siphon



COD

889983

Urinal seal



COD

890006

HYGEA electr WC module white

890007

Electric WC module HYGEA White Matte

890008

Electric WC module HYGEA Anthracite matte

890009

Electric WC module HYGEA Grey matte

890010

Electric WC module HYGEA Sand matte

890011

Electric WC module HYGEA Black matte



COD

890012

HYGEA seat & cover white

890013

HYGEA Seat & cover White matte

890014

HYGEA Seat & cover Anthracite matte

890015

HYGEA Seat & cover Grey matte

890016














HYGEA Seat & cover Sand matte




890017

HYGEA Seat & cover Black matte











PART NUMBER GUIDE




		White	White matte	Anthracite matte	Grey matte	Sand matte	Cappuccino matte	Black matte
 HYGEA		RB20100888514	RB20100888515	RB20100888516	RB20100888718	RB20100888517	-	RB20100889506
 RIVER toilet		RA20200888237	-	-	-	-	-	-
 RIVER SEAT & COVER		RD10000888262	-	-	-	-	-	-
 RIVER bidet		RC20200888245	-	-	-	-	-	-
 LAKE toilet		RA20100888231	RA20100889996	-	-	-	RA20100889995	RA20100888236
 LAKE SEAT & COVER	02	RD10000888360	-	-	-	-	-	RD10000888361
	06	RD10000889997	-	-	-	-	-	RD10000889998
 LAKE bidet		RC20100888241	-	-	-	-	-	RC20100888243
 LAKE back to wall toilet		RA10100888232	-	-	-	-	-	-
 LAKE SEAT & COVER back to wall	06	RD10000889177	-	-	-	-	-	-
	04	RD10000888605	-	-	-	-	-	-
 LAKE back to wall bidet		RC10100888239	-	-	-	-	-	-
 LAGOON Wall-hung toilet		RA20300888238	-	-	-	-	-	-
 LAGOON SEAT & COVER		RD10000888362	-	-	-	-	-	-
 LAGOON Wall-hung bidet		RC20300888246	-	-	-	-	-	-

 WxDxH	Weight	Qt.	 Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	 Pallet Width	Pallet Length	Weight
690x490x500	45	1	0	0	6	1.2	1	2	270
390x380x525	22.57	1	-	-	24	1.2	0.8	2.25	682.8
385x480x60	2.97	10	635x490x400	29.7	200	1.2	1	2.3	614
390x380x525	23.60	1	-	-	24	1.2	0.8	2.25	582.83
380x320x520	26.40	1	-	-	24	1.2	0.8	2.25	682.8
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
385x480x60	2.85	10	635x490x400	28.5	200	1.2	0.8	2.3	590
365x375x510	21.59	1	-	-	24	1.2	0.8	2.25	534.59
380x320x520	26.40	1	-	-	25	1.2	1	2.3	534.594
385x480x60	2.85	10	635x490x400	28.5	200	1.2	1	2.3	590
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
605x380x420	28.64	1	-	-	25	1.2	1	2.3	733.75
560x375x410	18.3	1	-	-	25	1.2	1	2.31	476.7
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
560x375x410	15.9	1	-	-	25	1.2	1	2.31	416.7



PART NUMBER GUIDE

	White	Satin white	Satin anthracite	Satin grey	Satin sand	Matte cappuccino	Black mate
 LAGOON back to wall toilet	RA10300888233	-	-	-	-	-	-
 LAGOON SEAT & COVER	RD10000888606	-	-	-	-	-	-
 LAGOON back to wall bidet	RC10300888240	-	-	-	-	-	-
 KAI	RE20100889511	-	-	-	-	-	RE20100889512
 VIOLET	RF10100890034	RF10100890035	-	-	-	RF10100890037	RF10100890036
 BREEZE	RF10100890038	RF10100890039	-	-	-	RF10100890041	RF10100890040
 SERENNA	RF10100890027	-	-	-	-	RF10100890029	RF10100890028
 SUN	RF10100890030	RF10100890031	-	-	-	RF10100890033	RF10100890032

									
WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
560x375x410	19.57	1	-	-	25	1.2	1	2.31	508.45
385x480x52	2.85	5	405x495x270	14.25	180	1.2	1	2.3	533
560x375x410	18.05	1	-	-	25	1.2	1	2.31	470.45
520x320x350	16.3	1	-	-	24	1.2	0.8	1.95	412
621x126x420	14.26	1	-	14.46	46	1.2	0.8	1.2	685.16
411x410x127	9.62	1	-	9.65	58	1.2	0.8	1.2	579.7
610x411x127	11.08	1	-	11.57	46	1.2	0.8	1.2	552.22
486x456x150	8.43	1	-	8.89	42	1.2	0.8	1.2	393.38







OCEAN 222



-  M16 water-saving aerator
-  M18 water-saving aerator
-  M24 water-saving aerator
-  M28 water-saving aerator
-  M12 aerator
-  M16 aerator
-  M24 aerator
-  Infrared electronic actuation

-  Ø25mm cartridge
-  Ø35mm cartridge
-  Ø40mm cartridge
-  Self-closing tap
-  Economic tap
-  10 seconds timer
-  Public spaces

-  Rotating tap
-  Start/stop shower
-  Multifunction shower
-  Shower mixer
-  Hand shower
-  Ceiling shower
-  Anti-theft

OCEAN




NEW PVD FINISHES:



Copper PVD Gold PVD White Gold PVD Gun Metal PVD

PERFECT MATCH WITH OLI FLUSH PLATES

OCEAN
High Basin Mixer NEW

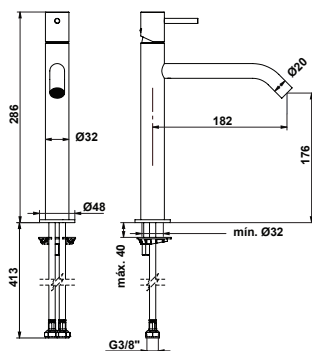

GENERAL FEATURES

- Brass body;
- Ø25mm standard cartridge;
- M16 water-saving aerator;
- Valve not included.


INCLUDES

- Installation accessories;
- Flexible hose.



- cod. **OA10000000024** Polished chrome
- cod. **OA10000000025** Black matte
- cod. **OA10000000036** Gold
- cod. **OA10000000035** White gold
- cod. **OA10000000038** Gun metal
- cod. **OA10000000037** Copper

OCEAN
Basin Mixer NEW

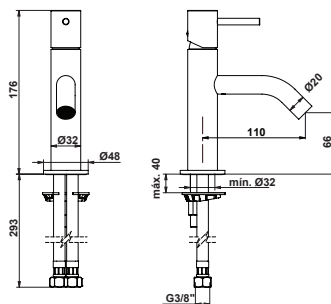

GENERAL FEATURES

- Brass body;
- Ø25mm standard cartridge;
- M16 water-saving aerator;
- Valve not included.


INCLUDES

- Installation accessories;
- Flexible hose.



- cod. **OA100000000305** Polished chrome
- cod. **OA100000000076** Black matte
- cod. **OA100000000340** Gold
- cod. **OA100000000339** White gold
- cod. **OA100000000342** Gun metal
- cod. **OA100000000341** Copper



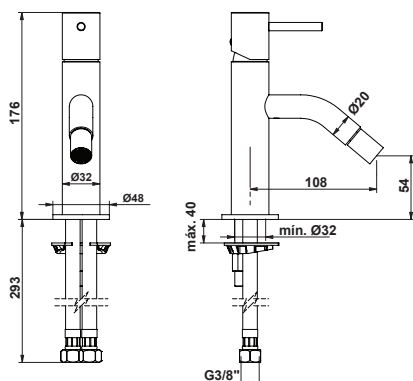

GENERAL FEATURES


- Brass body;
- Ø25mm standard cartridge;
- M16 swivel water-saving aerator;
- Valve not included.

INCLUDES

- Installation accessories;
- Flexible hose.



- | | |
|---------------------------|-----------------|
| cod. OA10000000306 | Polished chrome |
| cod. OA10000000073 | Black matte |
| cod. OA10000000344 | Gold |
| cod. OA10000000343 | White gold |
| cod. OA10000000346 | Gun metal |
| cod. OA10000000345 | Copper |

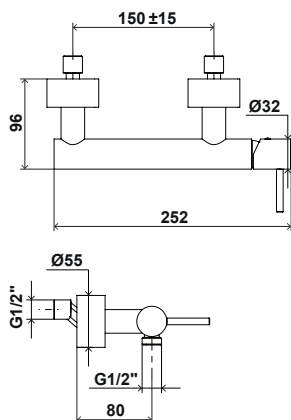

GENERAL FEATURES

- Brass body;
- Ø25mm standard cartridge;
- Flexible hose in stainless steel;
- Hand shower and holder in ABS with flow regulator.


INCLUDES

- Installation accessories;
- Hand shower and holder.



- | | |
|---------------------------|-----------------|
| cod. OA10000000307 | Polished chrome |
| cod. OA10000000072 | Black matte |

OCEAN
Bathtub Mixer

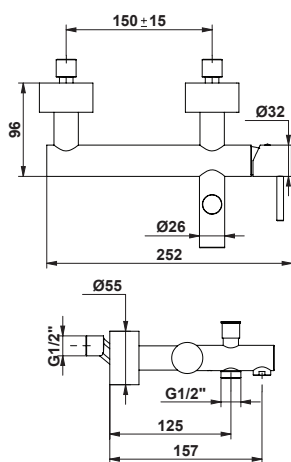

GENERAL FEATURES

- Brass body;
- Ø25mm standard cartridge;
- M18 aerator;
- Flexible hose in stainless steel;
- Hand shower and holder in ABS with flow regulator.


INCLUDES

- Installation accessories;
- Hand shower and holder.



- cod. **OA10000000308** Polished chrome
- cod. **OA10000000071** Black matte

OCEAN
Rainshower

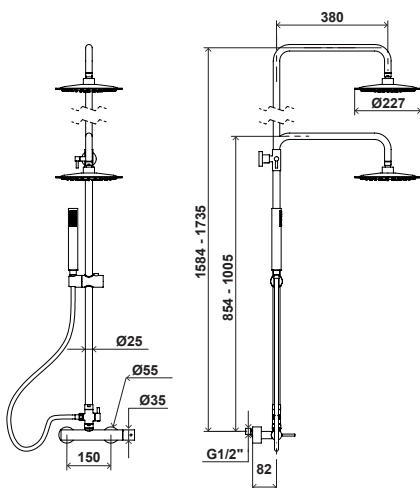

GENERAL FEATURES

- Material: Stainless steel.


INCLUDES

- Integrated arm with circular shower;
- Hand and ceiling shower, with built-in flow regulator;
- Shower holder;
- Flexible hose;
- Integrated inverter;
- Installation accessories.



- cod. **OA10000000080** Polished chrome
- cod. **OA10000000081** Black matte
- cod. **OA10000000348** Gold
- cod. **OA10000000347** White gold
- cod. **OA10000000350** Gun metal
- cod. **OA10000000349** Copper



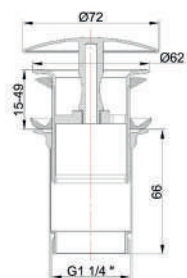


- Material: brass;
- Finish: Polished Chrome.

COD.

OA20000000337

Valve without overflow

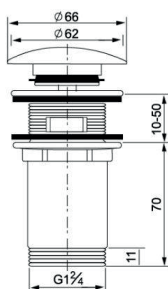

- Material: Zamak;
- Finish: Polished chrome or Black matte


COD.

OA20000000023


Clic-clac valve

OA20000000037

Clic-clac valve - Black matte

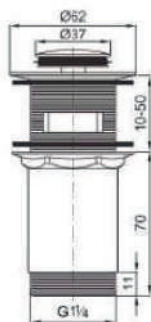

- Material: brass;
- Finish: Gold PVD, White Gold, Copper and Gun metal



COD.

OA20000000330

Clic-clac valve: Gold

OA20000000329


Clic-clac valve: White gold

OA20000000331

Clic-clac valve: Copper

OA20000000332

Clic-clac valve: Gun metal

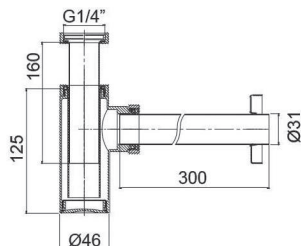


- Compatible with automatic flush valve and clic-clac;
- Material: Stainless steel;
- Finish: Chrome, Black matte, Gold PVD, White gold, Copper and Gun metal.

INCLUDED


- Installation accessories.

* See dimensioned drawing in the Datasheet



COD.

OA20000000024	Washbasin siphon
OA20000000032	Washbasin siphon Black matte
OA20000000034	Washbasin siphon Gold pvd*
OA20000000033	Washbasin siphon White gold pvd*
OA20000000035	Washbasin siphon Copper pvd*
OA20000000036	Washbasin siphon Gun metal pvd*



- Compatible with automatic flush valve and clic-clac;
- Material: stainless steel;
- Finish: Polished chrome or black matte.

INCLUDED

- Installation accessories.







COD.

OA20000000030	Bidet siphon
OA20000000031	Bidet siphon Black matte






PART NUMBER GUIDE

	Polish Chrome	Black Mate	Gold	White Gold	Gun metal	Cooper
<p>OCEAN High Basin Mixer</p> 	OA10000000024	OA10000000025	OA10000000336	OA10000000335	OA10000000338	OA10000000337
<p>OCEAN Basin Mixer</p> 	OA10000000305	OA10000000076	OA10000000340	OA10000000339	OA10000000342	OA10000000341
<p>OCEAN Bidet Mixer</p> 	OA10000000306	OA10000000073	OA10000000344	OA10000000343	OA10000000346	OA10000000345
<p>OCEAN Shower Mixer</p> 	OA10000000307	OA10000000072	-	-	-	-
<p>OCEAN Bathtub Mixer</p> 	OA10000000308	OA10000000071	-	-	-	-
<p>OCEAN Shower Ramp</p> 	OA10000000080	OA10000000081	OA10000000348	OA10000000347	OA10000000350	OA10000000349






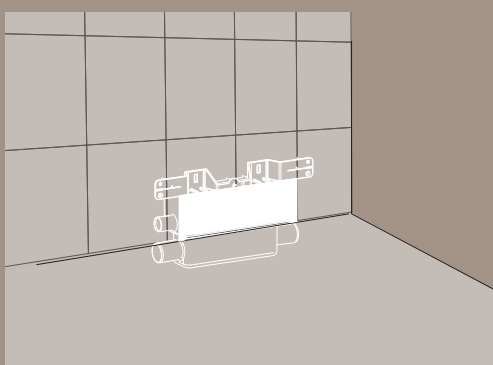

WALL

A shower drain system integrated into the wall with an elegant stainless steel grate, which allows you to use the entire shower space. Easy to maintain, it's the ideal solution for the shower.

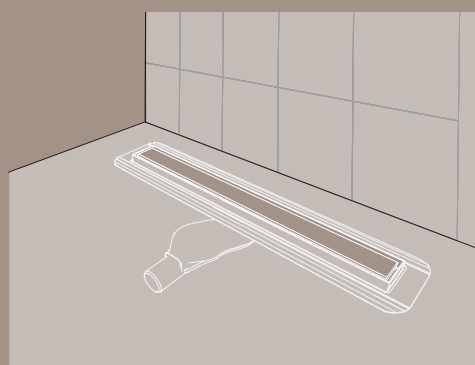

FLOOR

The floor-integrated shower drain system with an elegant stainless steel grate allows you to use the entire shower space. Easy to maintain, it's the ideal solution for any shower.

OLIFILO STANDARD	235
OLIFILO CERAMIC	237
OLIFILO STANDARD PLUS	240
OLIFILO CERAMIC PLUS	241
OLIFILO ADVANCED	245
OLIFILO X-WALL	247
BALANCE	248



Suitable for persons with reduced mobility



Easy installation and maintenance



ADJUSTABLE FEET




ANTI-ODORS
Dry Siphon




WATERPROOFING
Includes butyl roll.



HAIR FILTER

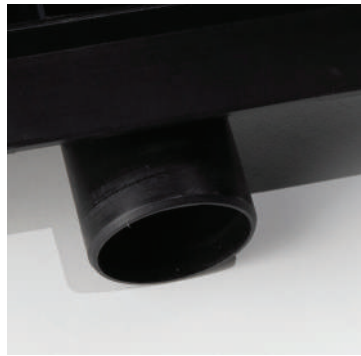

HORIZONTAL SIPHON Ø50MM

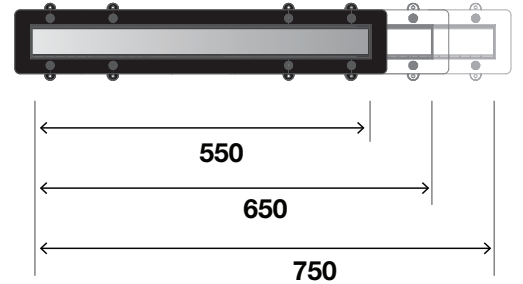

AVAILABLE IN SIZES: 550/650/750

BLACK LACQUERED STAINLESS STEEL



BRUSHED STAINLESS STEEL



CERAMIC



OLIFILO STANDARD NEW

WATERPROOFING
Waterproofing is guaranteed by the membrane and sealing roll.


FINISHES
Brushed stainless steel, black lacquered and with the possibility of customizing in the same finish as the bathroom

HEIGHT ADJUSTABLE LEGS
Facilitates installation, ensuring better drainage efficiency.

SIPHON
Horizontal Siphon Ø50 mm

IDEAL FOR PERSONS WITH REDUCED MOBILITY

INSTALLATION EXAMPLE

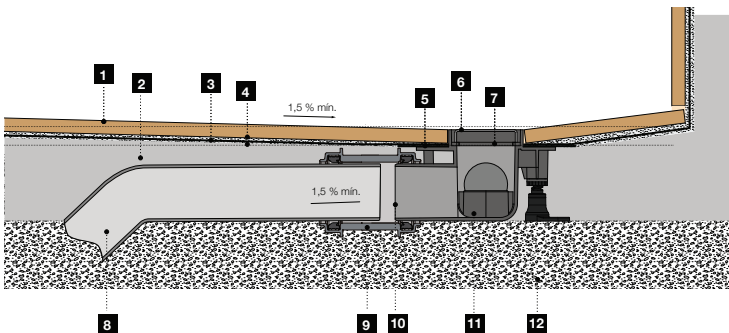

1	Floor	7	Grate
2	Mortar plaster with slope	8	Ø50mm drainage pipe
3	Membrane	9	Ø50/50 Adaptor
4	C2 Cement adhesive	10	Ø50 Outlet
5	Butyl band	11	Siphon body with water retention
6	Linear tray	12	Slab








OLIFILO STANDARD



550-650-750

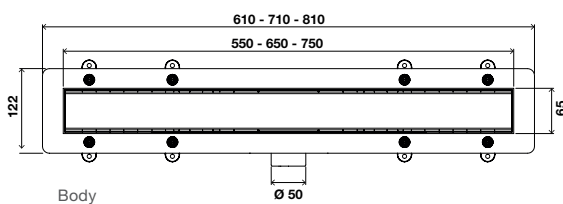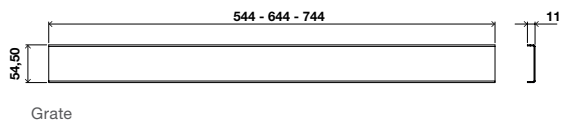

GENERAL FEATURES

- Stainless steel grate (AISI 304);
- Finish: Brushed and black lacquered;
- Height adjustable;
- Waterproofing included;
- PVC connection Ø50mm;
- Ideal for persons with reduced mobility.

Siphon :

- Dry Siphon , siphonic, in polypropylene (PP);
- Ø50 mm Siphon outlet.
- Evacuation flow rate 0.4 L/s.

Kit includes:




- Siphon + Grate;
- Membrane without adaptor (1.5Mx2M);
- Butyl roll;
- Hair filter;
- 4 support legs.



cod.	OB30000041055	550
cod.	OB30000041065	650
cod.	OB30000041075	750
cod.	OB30000045076	550 Black
cod.	OB30000045077	650 Black
cod.	OB30000045078	750 Black

OLIFILO CERAMIC

550-650-750

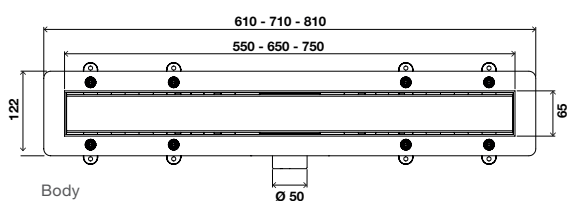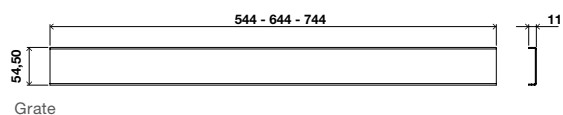

GENERAL FEATURES

- Integrated shower drain with the same floor finish, 10 mm height recommended.
- Height adjustable;
- Waterproofing included;
- PVC connection Ø50 mm;
- Ideal for persons with reduced mobility.

Siphon :

- Dry Siphon , siphonic, polypropylene (PP);
- Ø50 mm Siphon outlet.
- Evacuation flow rate 0.4 L/s.

Kit includes:

- Siphon + Grate;
- Membrane without adaptor (1.5Mx2M);
- Butyl roll;
- Hair filter;
- 4 support legs.



cod.	OB30000045055	550
cod.	OB30000045065	650
cod.	OB30000045075	750



INCLINATION GRADIENT
Ensures perfect water drainage.




SIPHONIC SIPHON
Siphon with 58mm height, designed for efficient drainage (28 l/min), easy cleaning, and maintenance.

This Siphon includes an adaptor with a factory-sealed membrane and requires a total installation height of 70mm.




TERMO-SEALED MEMBRANE ADAPTOR
The geotextile membrane, with 4 layers in its composition, two interior layers of EVA and two outside made of non-woven fabric, allows for greater waterproofing and plumbing of the water through the Siphon.



HAIR FILTER
Easy access for cleaning.



AVAILABLE IN SIZES:

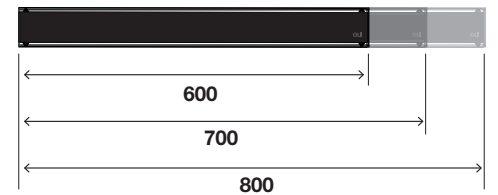

LACQUERED BLACK STAINLESS STEEL



BRUSHED STAINLESS STEEL



GOLD PVD



CERAMIC



OLIFILO STANDARD PLUS




IDEAL FOR PEOPLE WITH REDUCED MOBILITY

FINISHES

Brushed stainless steel, matte lacquered black, gold PVD and ceramic.

100% WATERPROOFING

Easy-to-install membrane, thanks to its flexibility and lightness. It can be adapted to any space.

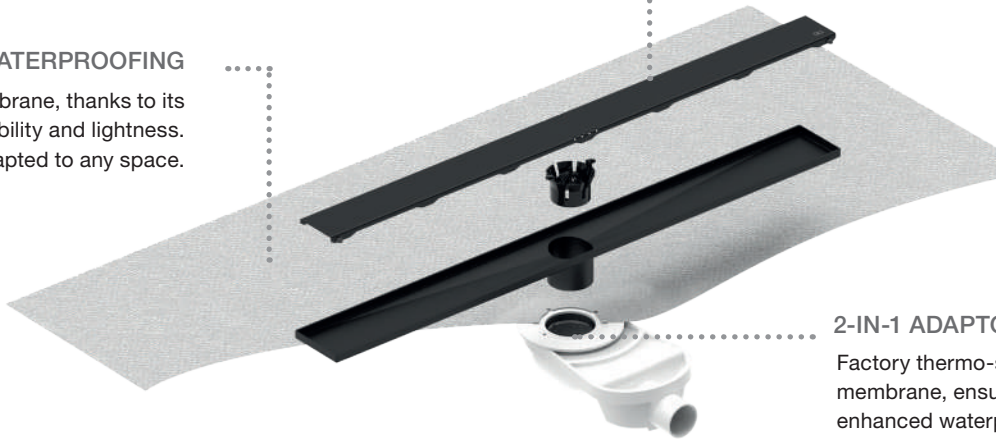


2-IN-1 ADAPTOR:

Factory thermo-sealed membrane, ensuring enhanced waterproofing. Easier connection to the Siphon .



360° ADJUSTABLE

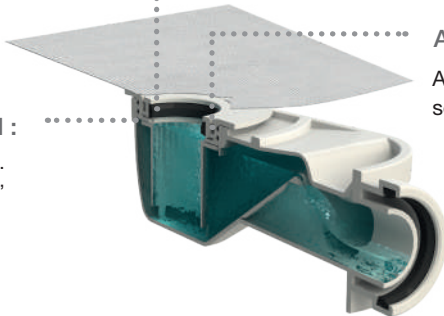


ANTI-BACKFLOW:

Anti-backflow system and secondary drainage.

HYDRAULIC SIPHON :

“Drainage efficiency. Flow rate > 28L/min (EN 1253).”

INSTALLATION EXAMPLE

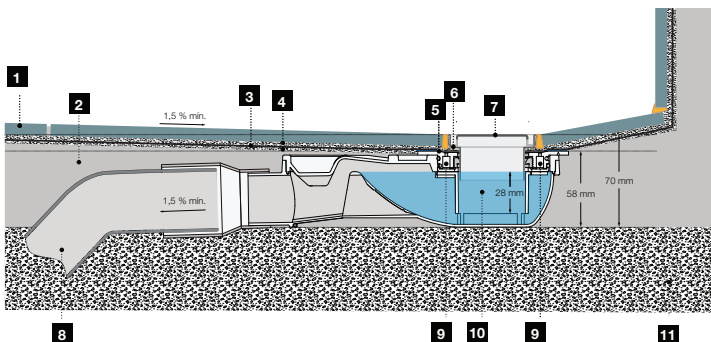


1	Floor	7	Grate
2	Mortar plaster with slope	8	Ø50mm drainage pipe
3	Membrane	9	Secondary drainage
4	C2 cement adhesive	10	Siphon body with water retention
5	Butyl band	11	Slab
6	Linear tray		





OLIFILO STANDARD PLUS

600-700-800

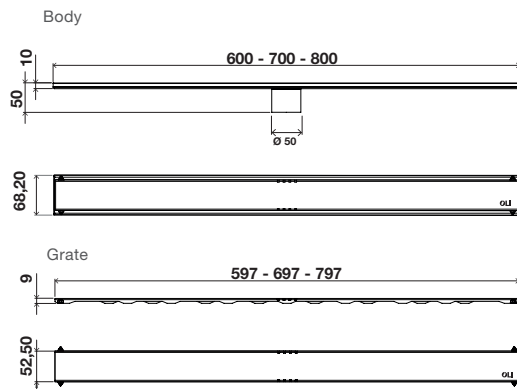

GENERAL FEATURES

- Stainless steel Grate (AISI 304);
- Finish: brushed, matte black lacquered and gold PVD;
- Easy installation;
- Connection with pressure fitting;
- Waterproofing included;
- Ideal for people with reduced mobility.

Siphon :

- ABS siphonic Siphon ;
- Ø40 mm Siphon outlet.
- Flow rate >28 L/min.

KIT INCLUDES:

- Siphon + body + Grate;
- Membrane without adaptor (1.5Mx2M);
- Hair filter.
- Body
- Grate



cod.	OB30000041830	600
cod.	OB30000041831	700
cod.	OB30000041832	800
cod.	OB30000051830	DARK 600
cod.	OB30000051831	DARK 700
cod.	OB30000051832	DARK 800
cod.	OB30000061830	Gold 600
cod.	OB30000061831	Gold 700
cod.	OB30000061832	Gold 800


OLIFILO CERAMIC PLUS

600-700-800




ceramic plus

Body

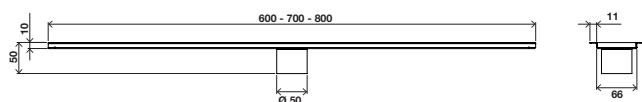

Grate



GENERAL FEATURES

- Integrated shower drain with the same floor finish;
- Height adjustable;
- Waterproofing included;
- Ø50mm PVC connection;
- Ideal for people with reduced mobility.

Siphon:

- Dry Siphon , siphonic, in polypropylene (PP);
- Ø50mm Siphon outlet;
- Evacuation flow rate 0.4 L/s.

KIT INCLUDES:

- Siphon + Grate;
- Membrane without adaptor (1.5Mx2M);
- Butyl roll;
- Hair filter;
- 4 support feet.




cod.	OB30000045830	600
cod.	OB30000045831	700
cod.	OB30000045832	800





CUSTOMIZABLE SOLUTION

Adjustable size.



SIPHONIC SIPHON

Siphon with 58mm height, with a design that provides efficient drainage (28 l/min), cleaning and maintenance.



**CUSTOMISABLE SOLUTION
THERMO-SEAL ADAPTOR
MEMBRANE**

The geotextile membrane, with 4 layers in its composition, two interior layers of EVA and two outside made of non-woven fabric, allows for greater waterproofing and plumbing of the water through the Siphon .




EASY-TO-REMOVE GRATE

Filter easy access for cleaning.



HAIR FILTER

Easy access for cleaning



BLACK ANODIZED ALUMINIUM



CHROME ANODIZED ALUMINIUM



OLIFILO ADVANCED PLUS



IDEAL FOR PEOPLE WITH REDUCED MOBILITY

100% WATERPROOFING


Easy-to-install membrane, thanks to its flexibility and lightness. It can be adapted to any space.

FINISHES

Chromed and black anodised

MATERIAL

Aluminium 6063 T6

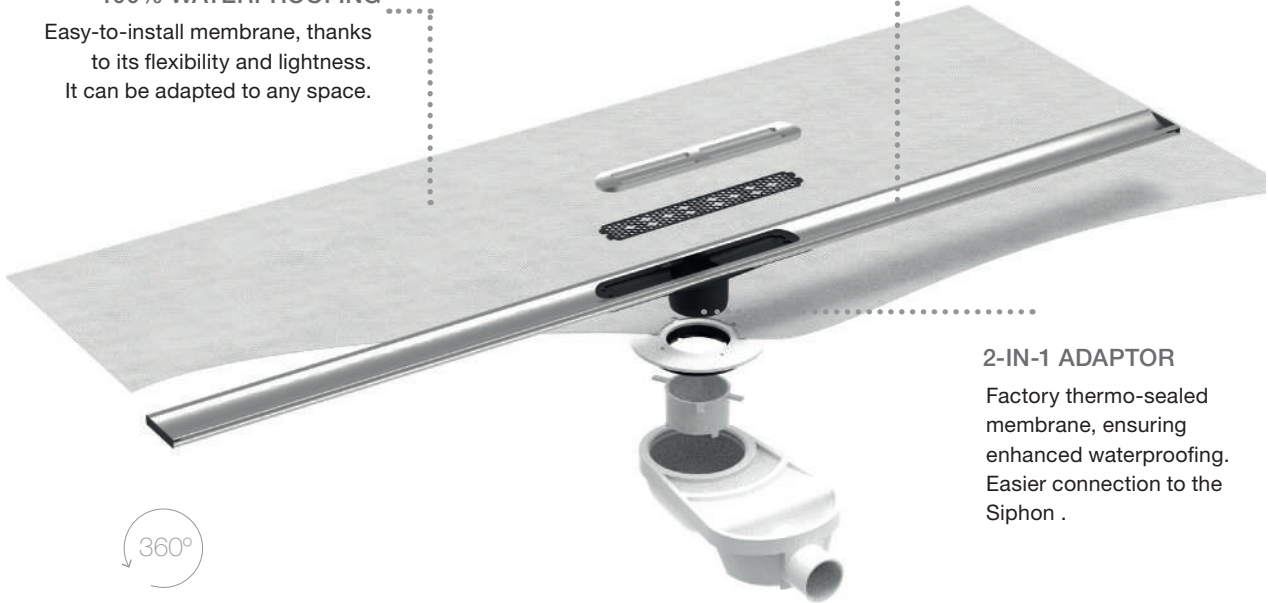


2-IN-1 ADAPTOR

Factory thermo-sealed membrane, ensuring enhanced waterproofing. Easier connection to the Siphon .



360° ADJUSTABLE

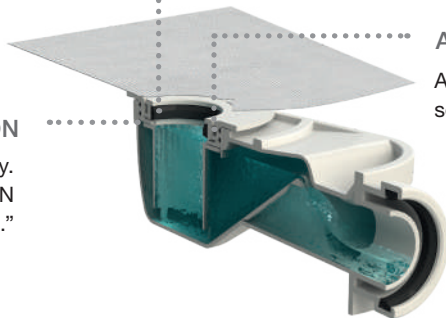


ANTI-BACKFLOW

Anti-backflow system and secondary drainage.

HYDRAULIC SIPHON

“Drainage efficiency. Flow rate > 28L/min (EN 1253).”

INSTALLATION EXAMPLE

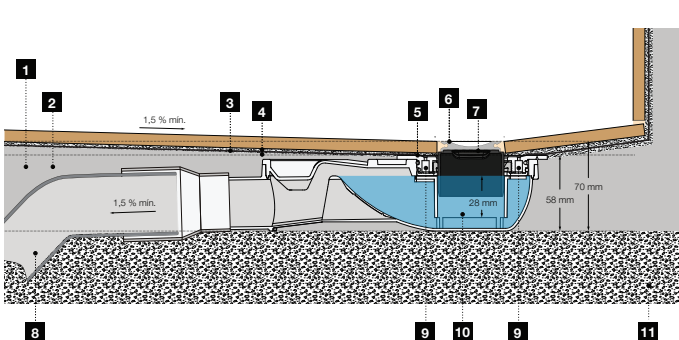


1	Floor	7	Hair collector
2	Mortar plaster with slope	8	Ø50mm drainage pipe
3	Membrane	9	Secondary drainage
4	C2 cement adhesive	10	Siphon body with water retention
5	Butyl band	11	Slab
6	Linear tray		





OLIFILO ADVANCED

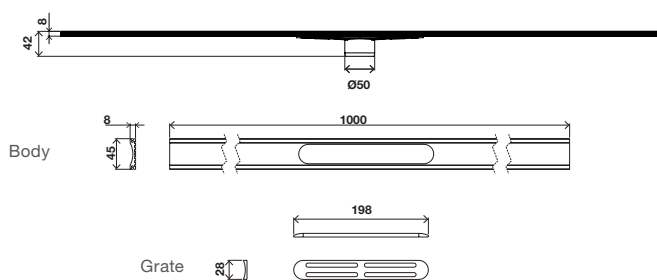

GENERAL FEATURES

- Adjustable to the required size;
- Material: Aluminium 6063 T6;
- Colour/Finish: Chromed anodised and black (25 microns);
- High corrosion resistance;
- Grate height: 8mm;
- Outlet pipe: Ø50mm;
- Pressure fitting waterproof connection;
- Membrane with adaptor;
- Ideal for people with reduced mobility.

Siphon :

- Siphonic Siphon in ABS;
- Ø40 mm Siphon outlet;
- Evacuation flow rate: >28 L/min.

Kit includes:

- Siphon + body + Grate;
- Membrane with adaptor (1.5Mx2M);
- Hair filter.




cod. **OB30000023804**

1000


cod. **OB30000053804**

DARK 1000



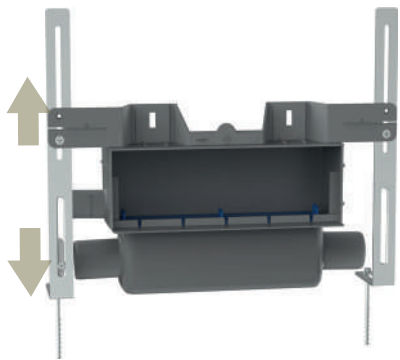

HEIGHT ADJUSTABLE FEET
Facilitates the installation process.

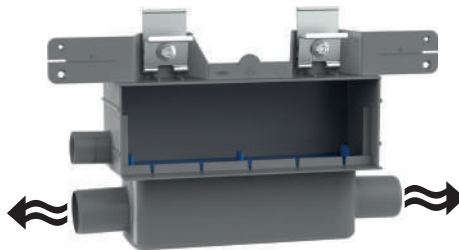



DUAL CONNECTION
Water drainage can be connected to the right or left.




THERMO-SEALED MEMBRANE TO SIPHON
Easier to apply.



GRATE ADJUSTMENT
Adjustable according to wall thickness.

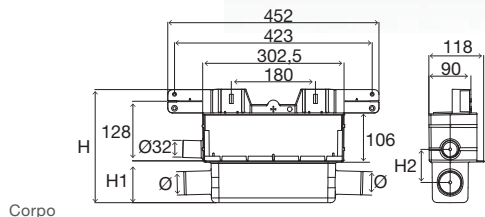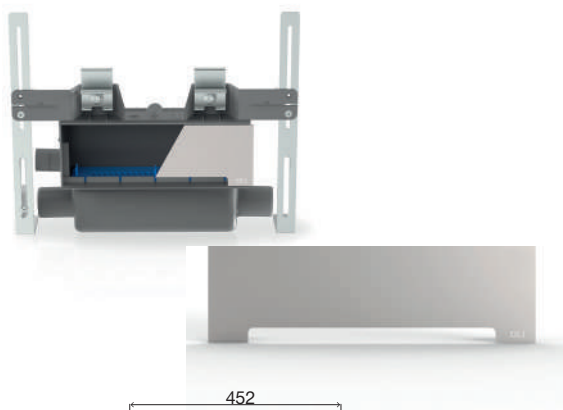

Corpo

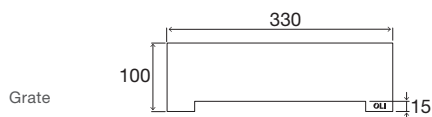

Grate

GENERAL FEATURES

- Matte brushed stainless steel grate;
- Minimum installation height: 70mm;
- Condensate discharge systems for integrated air conditioning systems;
- Siphon body made of ABS for better adhesion to the pre-mounted waterproof membrane;
- High flow rate: 0.6 l/s (36 l/min);
- High resistance to odors: 290 Pa (200 Pa requested);
- For installation in walls thicker than 11 cm;
- Ideal for people with reduced mobility.

INCLUDES:

- Siphon + body + grate;
- Membrane;
- Hair filter;
- Body;
- Grate.




cod. **OB30000000201** 30 Matte

OLIFILO X-WALL



IDEAL FOR PEOPLE WITH REDUCED MOBILITY

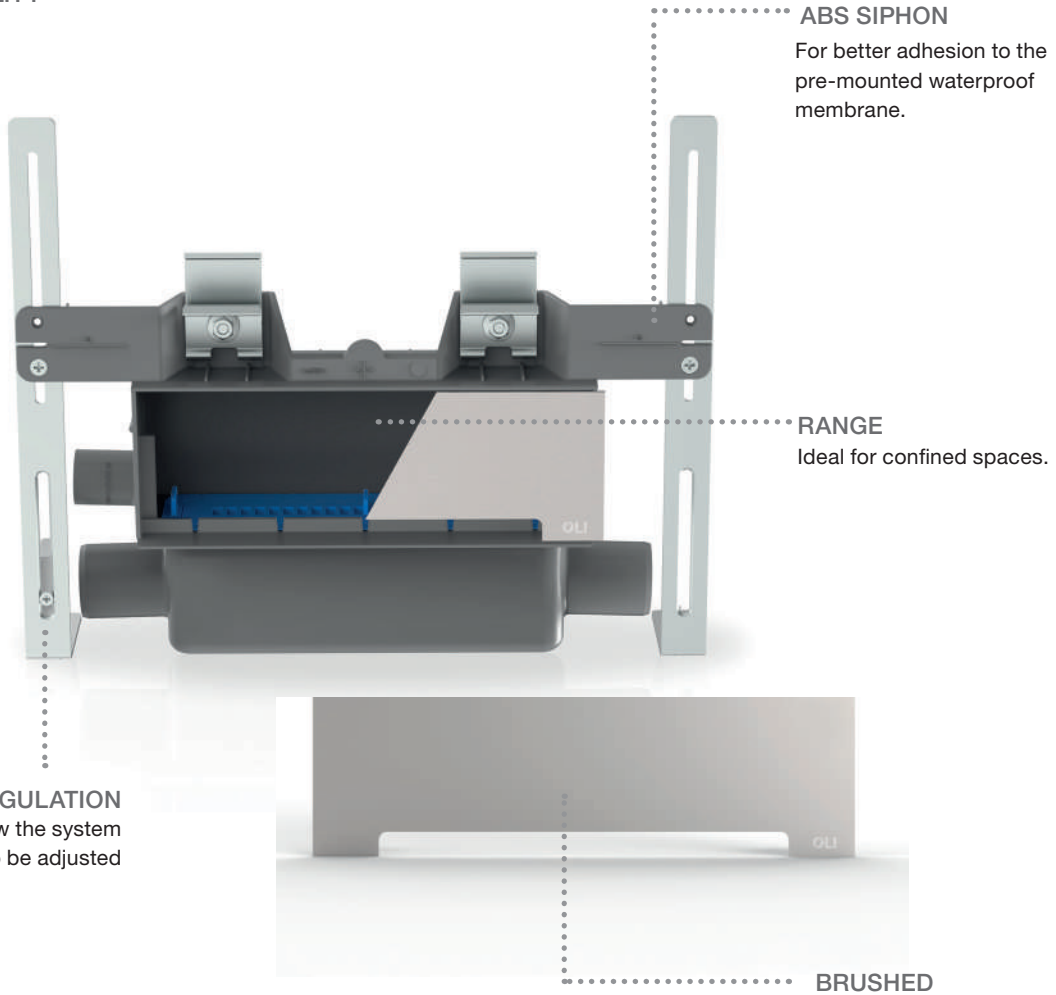

INSTALLATION EXAMPLE



Drywall application



Technical rail application



BALANCE



BALANCE




GENERAL FEATURES

- Extra-flat shower tray - easy access;
- Texture: Stone;
- Class 3, slip-resistant;
- Exterior coating in high-resistance sanitary gel coat;
- Inner mineral load and colored resin mass;
- Color: White (RAL9003) and Black (RAL9005);
- Stainless steel grate AISI 304;
- Grate size: 132x132mm;
- Valve for Ø90 shower tray (42 L/min);
- Can be cut to size*;
- CE marking.

*Cut for intermediate dimensions: 24€

For intermediate dimensions, the price is based on the higher measurement.

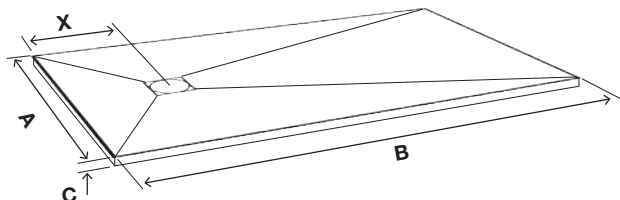








HOW TO GET THE REFERENCE FOR YOUR SHOWER TRAY:

In the 'COD' column, the letter Y should be replaced with the number 1 when the finish is white, and with the number 2 when the finish is black.

A	B	C	X	COD	A	B	C	X	COD
700	900	24-26	300	OB2001007090 Y	900	900	24-26	450	OB2001009090 Y
	1000		300	OB2001070100 Y		1000		300	OB2001090100 Y
	1200		350	OB2001070120 Y		1200		350	OB2001090120 Y
	1400		400	OB2001070140 Y		1400		400	OB2001090140 Y
	1500		400	OB2001070150 Y		1500		400	OB2001090150 Y
	1600		450	OB2001070160 Y		1600		450	OB2001090160 Y
	1700		450	OB2001070170 Y		1700		450	OB2001090170 Y
	1800		500	OB2001070180 Y		1800		500	OB2001090180 Y
	2000		500	OB2001070200 Y		2000		500	O20010902000 Y
	2200		600	OB2001070220 Y		2200		600	O20010090220 Y
800	800	24-26	400	OB2001008080 Y					
	1000		300	OB2001080100 Y					
	1200		350	OB2001080120 Y					
	1400		400	OB2001080140 Y					
	1500		400	OB2001080150 Y					
	1600		450	OB2001080160 Y					
	1700		450	OB2001080170 Y					
	1800		500	OB2001080180 Y					
	2000		500	OB2001080200 Y					
	2200		600	OB2001080220 Y					



PART NUMBER GUIDE

		550	650	750	600	700	800	900	1000			
	W	OB30000041055	OB30000041065	OB30000041075	-	-	-	-	-			
	B	OB30000045076	OB30000045077	OB30000045078	-	-	-	-	-			
		OB30000045055	OB30000045065	OB30000045075	-	-	-	-	-			
	W	-	-	-	OB30000041830	OB30000041831	OB30000041832	-	-			
	B	-	-	-	OB30000051830	OB30000051831	OB30000051832	-	-			
	G	-	-	-	OB30000061830	OB30000061831	OB30000061832	-	-			
		-	-	-	OB30000045830	OB30000045831	OB30000045832	-	-			
	W	-	-	-	-	-	-	-	OB30000023804			
	B	-	-	-	-	-	-	-	OB30000053804			
		-	-	-	-	OB30000000201	-	-	-			
		-	-	-	-	OB2001007090	Y	OB2001008080	Y	OB2001009090	Y	-
		-	-	-	-	OB2001070100	Y	OB2001080100	Y	OB2001090100	Y	-
		-	-	-	-	OB2001070120	Y	OB2001080120	Y	OB2001090120	Y	-
		-	-	-	-	OB2001070140	Y	OB2001080140	Y	OB2001090140	Y	-
		-	-	-	-	OB2001070150	Y	OB2001080150	Y	OB2001090150	Y	-
		-	-	-	-	OB2001070160	Y	OB2001080160	Y	OB2001090160	Y	-
		-	-	-	-	OB2001070170	Y	OB2001080170	Y	OB2001090170	Y	-
		-	-	-	-	OB2001070180	Y	OB2001080180	Y	OB2001090180	Y	-
		-	-	-	-	OB2001070200	Y	OB2001080200	Y	OB2001090200	Y	-
		-	-	-	-	OB2001070220	Y	OB2001080220	Y	OB2001090220	Y	-

*In the 'COD' column, the letter Y should be replaced with the number 1 when the finish is white, and with the number 2 when the finish is black.



WxDxH	Weight	Qt.	Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	Pallet Width	Pallet Length	Weight
150x100x1030	3	-	-	-	40	1.2	0.8	1.1	129
150x100x1030	3	-	-	-	40	1.2	0.8	1.1	129
105x155x1300	3.1	-	-	-	40	1.2	1	1.2	133
105x155x1300	3.2	-	-	-	40	1.2	1	1.2	137
105x155x1300	2.7	-	-	-	40	1.2	1	1.2	117
475x265x155	1.5	-	-	-	98	1.2	0.8	2.4	158
-	26	1	-	26	16	1.2	0.8	-	436
-	29	1	-	29	16	1.2	0.8	-	484
-	45	1	-	45	16	1.2	0.8	-	740
-	53	1	-	53	16	1.2	0.8	-	868
-	50	1	-	50	16	1.2	0.8	-	820
-	60	1	-	60	16	1.2	0.8	-	980
-	64	1	-	64	16	1.2	0.8	-	1044
-	68	1	-	68	16	1.2	0.8	-	1108
-	76	1	-	76	16	1.2	0.8	-	1236
-	83	1	-	83	16	1.2	0.8	-	1348





SUSTAINABLE PRODUCT

Electric radiators, due to their flexibility in achieving maximum comfort and doing so rigorously at the required times, can be considered an EFFICIENT PRODUCT THAT CONTRIBUTES TO RESPONSIBLE ENERGY CONSUMPTION.

ECOOOL ELECTRIC TOWEL RADIATOR 254



Programmable
DIGITAL CHRONOTHERMOSTAT



BACKLIGHTING
Easy to visualise the menu






POWER CABLE
matching the colour of the radiator



MOUNTING BRACKETS
in the same colour as the radiator

OLICLIMA ELECTRIC TOWEL RADIATOR NEW

White/Polished Chrome/Black

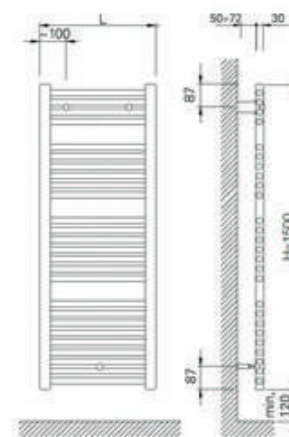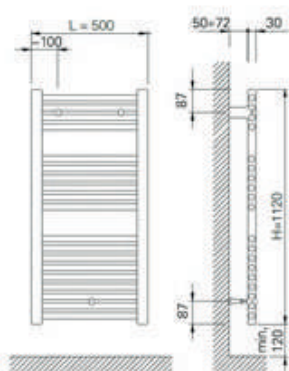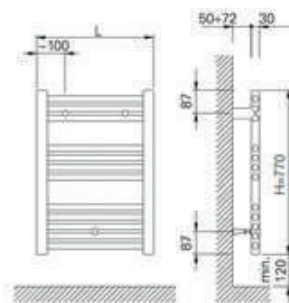

GENERAL FEATURES

- Digital thermostat with class I insulation;
- IP44 degree of protection;
- Power supply: 230 V ~50Hz;
- Temperature regulation range: 7 to 30°C;
- Supplied in White RAL 9010, Chrome and Black;
- Material: Steel;
- Weekly daily programme;
- Boost function;
- Working mode: Comfort, Eco and Anti-frost;
- Includes wall fixing kit and 1m power cable.




- cod. **KC20000552548** 803X500 White
- cod. **KC20000552549** 1110X500 White
- cod. **KC20000552550** 1420X500 White
- cod. **KC20000552551** 803X500 Chrome
- cod. **KC20000552552** 1110X500 Chrome
- cod. **KC20000552553** 1420X500 Chrome
- cod. **KC20000552554** 803X500 Black
- cod. **KC20000552555** 1110X500 Black
- cod. **KC20000552556** 1420X500 Black

Colour/Finish	Height (mm)	Width W (mm)	Between axles C (mm)	Weight (kg)	Number of pipes	Thermal power
White and Black	803	500	450	8.2	13	400
	1110	500	450	12.4	22	700
	1420	500	450	17.4	28	850
Polished Chrome	803	500	450	8.2	13	300
	1110	500	450	12.4	22	400
	1420	500	450	17.4	28	500



PART NUMBER GUIDE

		803	1110	1420
	White	KC20000552548		
	Chrome	KC20000552551		
	Black	KC20000552554		
	White		KC20000552549	
	Chrome		KC20000552552	
	Black		KC20000552555	
	White			KC20000552550
	Chrome			KC20000552553
	Black			KC20000552556

 WxDxH	Weight	Qt.	 Multiple Box Dim	Weight	Qty per Pallet	Pallet Height	 Pallet Width	Pallet Length	Weight
879x550x90	10	-	-	-	-	-	-	-	-
879x550x90	10	-	-	-	-	-	-	-	-
879x550x90	10	-	-	-	-	-	-	-	-
1183x550x90	14.5	-	-	-	-	-	-	-	-
1183x550x90	14.5	-	-	-	-	-	-	-	-
1183x550x90	14.5	-	-	-	-	-	-	-	-
1493x550x90	18	-	-	-	-	-	-	-	-
1493x550x90	18	-	-	-	-	-	-	-	-
1493x550x90	18	-	-	-	-	-	-	-	-





CUSTOMER SUPPORT

ALWAYS CONTACT OLI SUPPORT THROUGH PHONE OR E-MAIL

OLI provides phone contact +351 234 300 200 and email export@oli-world.com to provide a close accompaniment throughout the year for every project.

OLI ON SOCIAL MEDIA

FOLLOW ALL OLI UPDATES AND NEWS



BIM

OLI IS COMMITTED TO BE AT THE FOREFRONT OF DEVELOPMENT IN THE CONSTRUCTION SECTOR.

BIM is the new standard of construction and facilitates the transfer of information between stakeholders and enables integrated management throughout the product life cycle. www.oli-world.com/en/services/-/bim-objects/



OLI TECH

OLI TECH WAS DEVELOPED FOR SMARTPHONE AND TABLET TO PROVIDE DIRECT ACCESS TO USEFUL INFORMATION FOR PROFESSIONALS.

Get quick access to technical data sheets, assembly instructions, maintenance videos and products characteristics that OLI offers to market.


Download OLI TECH through the QR-CODES and give feedback to: communication@oli-world.com



GENERAL SALES CONDITIONS

The General Sales Conditions in force regulate all commercial transactions between OLI Sistemas Sanitarios, S.A. and the customer and apply to all orders, deliveries, payments, returns and guarantees concerning goods, equipment, materials and services provided by OLI Sistemas Sanitarios, S.A. the detailed document is available for consultation on the official website of OLI Sistemas Sanitarios, S.A.

[https://www.oli-world.com/en/general-sales-conditions-/](https://www.oli-world.com/en/general-sales-conditions/)

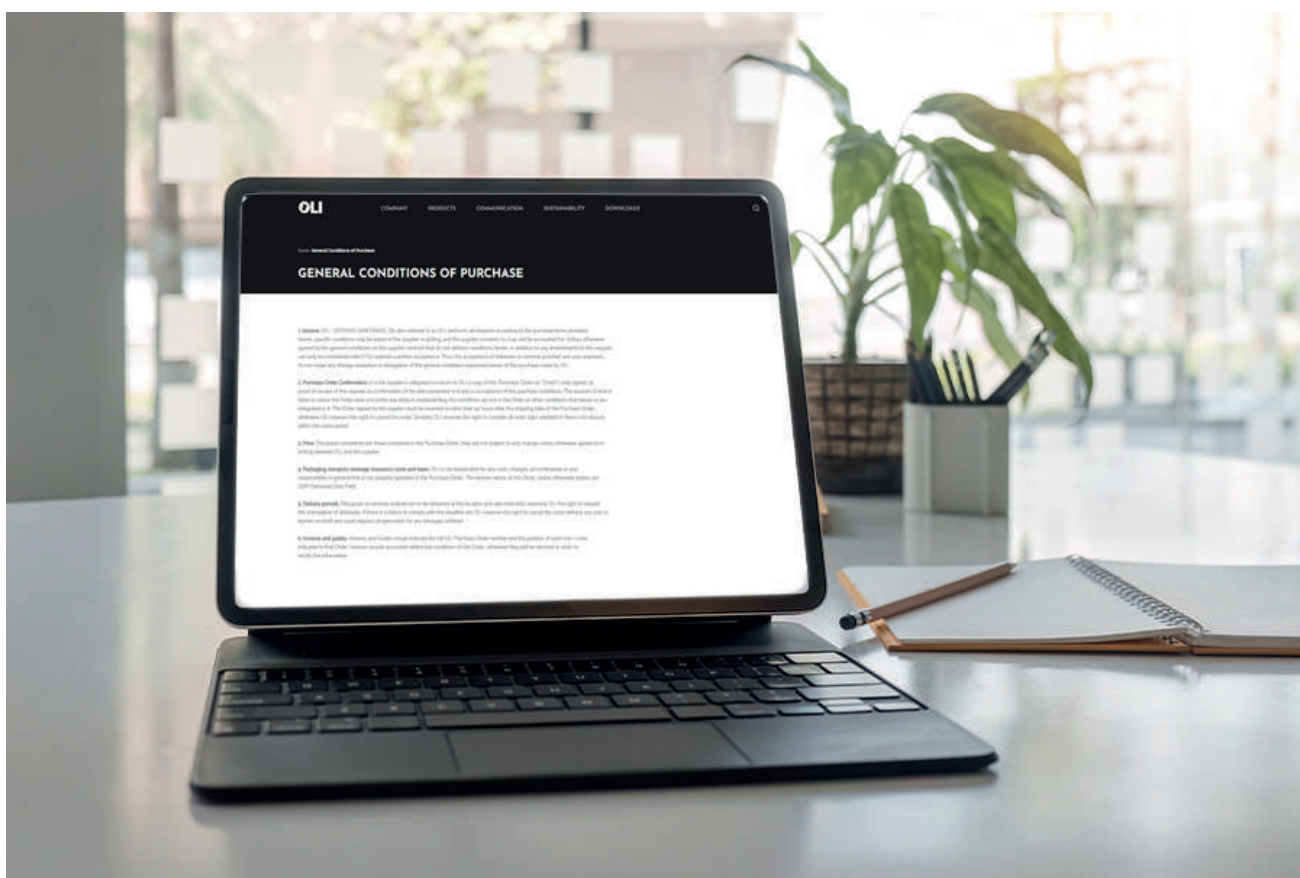

OLI – Sistemas Sanitarios, S.A. reserves the right to make changes to the products in this catalogue without notice. Product images are for illustrative purposes only and may differ from the actual product. For more information, please visit www.oli-world.com.





OLI-Sistemas Sanitários, S.A.
Travessa do Milão, 11, Esgueira
3800-314 Aveiro, Portugal

T (+351) 234 300 200
F (+351) 234 300 212
www.oli-world.com
export@oli-world.com

C.0050.08-03.2025
ZB03000000077

Inspired by water...